



- (51) International Patent Classification:
A01G 23/04 (2006.01)
- (21) International Application Number:
PCT/GB2013/052683
- (22) International Filing Date:
15 October 2013 (15.10.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
1218653.2 17 October 2012 (17.10.2012) GB
- (71) Applicant: **PLATIPUS ANCHORS HOLDINGS LIMITED** [GB/GB]; Kingsfield Business Centre, Philanthropic Road, Redhill, Surrey, RH1 4DP (GB).
- (72) Inventors: **AGG, Charles Simon James**; Dene Farm House, Dean Oak Lane, Leigh, Reigate, Surrey RH2 8PY (GB). **RUSSELL, Michael Hamilton**; 6 Swallow Rest, Burgess Hill, RH15 9XS (GB).
- (74) Agent: **BOULT WADE TENNANT**; Verulam Gardens, 70 Grays Inn Road, London, Greater London, WC1X 8BT (GB).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,

[Continued on next page]

(54) Title: Tree Anchoring Apparatus, Kit and Method

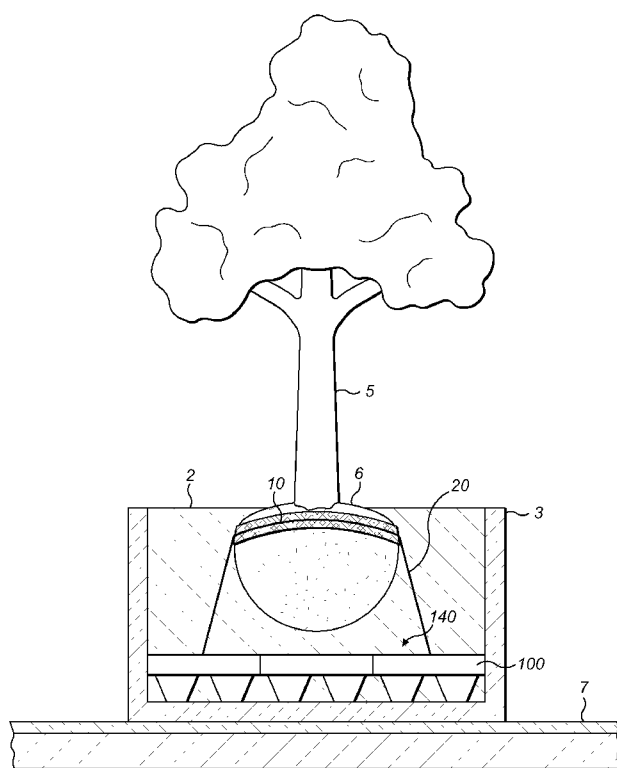


FIG. 1

(57) Abstract: Tree anchoring apparatus (100) comprising: a plurality of interlocking anchor units (110), each anchor unit (110) having connection means (270, 275) allowing the anchor unit to be secured to at least one adjacent anchor unit (110); an anchoring point (250) provided for each anchor unit (110); and a cable or strap (20) securable to at least one of the anchoring points (250); wherein: the plurality of interlocking anchor units (110) are transportable disengaged from one another and can be interlocked with each other in situ to jointly provide a surface for supporting an overburden of soil; and the cable or strap (20) can be used to secure the interlocked anchor units (110) to a root ball (6) of a tree (5) located there above.



EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, **Published:**

LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,

GW, KM, ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*