



(51) International Patent Classification:

B60G 3/04 (2006.01) **H02K 7/116** (2006.01)
B60K 7/00 (2006.01)

(21) International Application Number:

PCT/SE2010/051487

(22) International Filing Date:

27 December 2010 (27.12.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1050035-3 14 January 2010 (14.01.2010) SE

(71) Applicant (for all designated States except US): **BAE SYSTEMS HÄGGLUNDS AKTIEBOLAG** [SE/SE];
S-891 82 Örnköldsvik (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **KARLSSON, Pontus**
[SE/SE]; Nygatan 42, 3 tr., S-891 34 Örnköldsvik (SE).

(74) Agent: **ALBIHNS,ZACCO AB**; Valhallavägen 117,
P.O. Box 5581, S-114 85 Stockholm (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: DRIVELINE WITH PENDULUM SUSPENDED DRIVE SHAFT

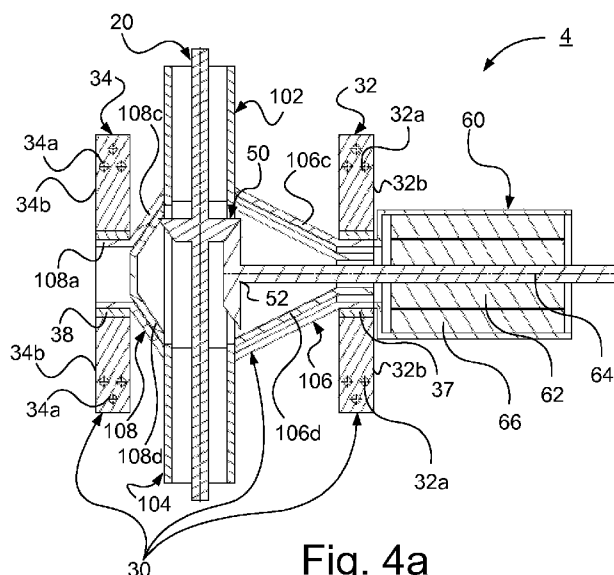


Fig. 4a

(57) Abstract: The invention relates to a driveline for a motor vehicle comprising drive shaft (20) suspended by means of a pendulum suspension (30), the pendulum suspension (30) comprising a fastening configuration (32, 34) fixedly connected to the vehicle and a drive shaft fastening (106) connected to the drive shaft (20) and pivotally journaled in bearings relative to the fastening configuration (32, 34), wherein the transmission configuration (50) comprises a driven input shaft (52), wherein an electric motor (60) is arranged for driving of the drive shaft (20), wherein the rotor of the electric motor (60) is connected to the input shaft (52) and a non-rotating portion of the electric motor (60) comprising the stator (66) of the electric motor (60) is fixedly connected to said drive shaft fastening (106). The invention also relates to a motor vehicle.