PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5 : G09G 3/36

A1

(11) International Publication Number: WO 94/23415

(43) International Publication Date: 13 October 1994 (13.10.94)

(21) International Application Number: PCT/US94/03633

(22) International Filing Date: 1 April 1994 (01.04.94)

(30) Priority Data:
08/043,001 5 April 1993 (05.04.93) US

(71) Applicant: CIRRUS LOGIC, INC. [US/US]; 3100 West Warren Avenue, Fremont, CA 94538 (US).

(72) Inventors: BASSETTI, Chester, Floyd, Jr.; 4372 Bristolwood Road, Pleasanton, CA 94588 (US). CHANG, Chin-Hsian; 1055 Sandalwood Lane, Milpitas, CA 95035 (US). BRIL, Vlad; 232 Darryl Drive, Campbell, CA 95008 (US). BINDLISH, Rakesh, Kumar; 386 Avenida Manzanos, San Jose, CA 95123 (US).

(74) Agents: SEKIMURA, Gerald, T. et al.; Limbach & Limbach, 2001 Ferry Building, San Francisco, CA 94111-4262 (US).


(81) Designated States: AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, ES, FI, GB, GE, HU, JP, KG, KP, KR, KZ, LK, LU, LV, MD, MG, MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SI, SK, TJ, TT, UA, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published
With international search report.
Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(unmarked)

RTMN's copy.

This Sheet Has Been Replaced

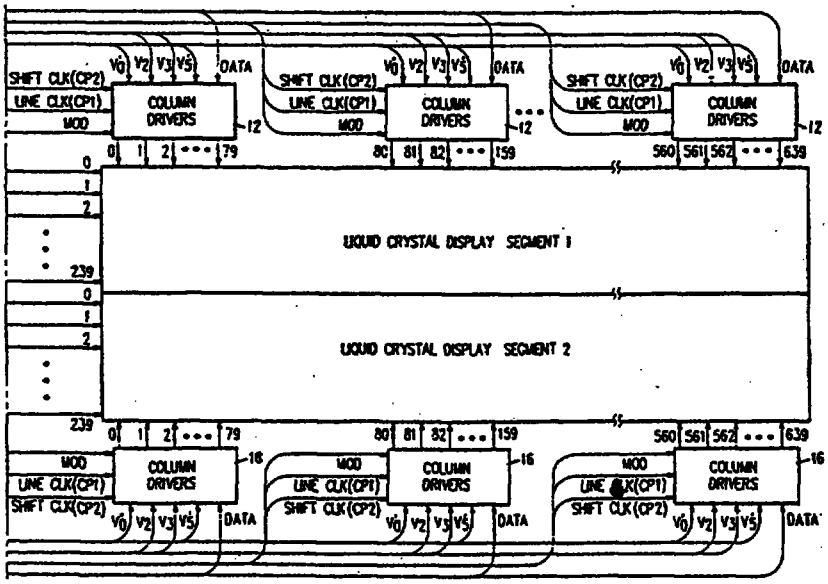

(54) Title: SYSTEM FOR COMPENSATING CROSSTALK IN LCDS

(57) Abstract

A method and apparatus for compensating crosstalk in liquid crystal displays (1 and 2) is disclosed which involves applying boost voltages (V5- and V0+) to the rows (40) and columns (38) of the display (1 and 2) in proportion to the number of ON pixels in a row (40) or column (38), the number of transitions between "ON-and-OFF" or "OFF-and-ON" in each column, and the position of the pixel (Px, y) ina row (40). "Boost" voltages (V5- and V0+) are applied to each row (40) as it is being actively scanned to provide horizontal crosstalk compensation, while "boost" voltages (V5- and V0+) are applied to each column (38) during the vertical retrace interval of the display sequence to provide vertical crosstalk compensation. In a preferred embodiment, the vertical crosstalk compensation is determined during the vertical retrace interval over several frames.