



(51) International Patent Classification:

H02J 1/00 (2006.01) *H02J 1/12* (2006.01)
F24F 13/00 (2006.01) *H02J 15/00* (2006.01)
F25B 1/00 (2006.01) *H02J 3/38* (2006.01)

(21) International Application Number:

PCT/CA2020/050034

(22) International Filing Date:

14 January 2020 (14.01.2020)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/791,992 14 January 2019 (14.01.2019) US

(71) Applicant: **SMARTD CHILLER GROUP INC.**

[CA/CA]; 1800 Trans-Canada Highway, Dorval, Québec H9P 1H7 (CA).

(72) Inventors: **CANINO, Vincent**; 7 Verano, Foothill Ranch,

California 92610 (US). **TUTWILER, Gregory**; 313 Victoria Drive, Bridgewater, Virginia 22812 (US). **SWAN, Pe-**

ter; 1 Norton Lane, Bowral, New South Wales 2576 (AU). **JOHNSON, Scott**; 1065 Rue Trudeau, Saint-Laurent, Québec H4N 2B9 (CA). **RICHMOND-SMITH, Roger**; 1869 Rene-Levesque Blvd West, Montreal, Québec H3H 1R4 (CA).

(74) Agent: **LAVERY, DE BILLY, L.L.P.**; 1, Place Ville

Marie, Bureau 4000, Montréal, Québec H3B 4M4 (CA).


(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every

kind of regional protection available): ARIPO (BW, GH,

(54) Title: DIRECT CURRENT CHILLER METHOD AND SYSTEM

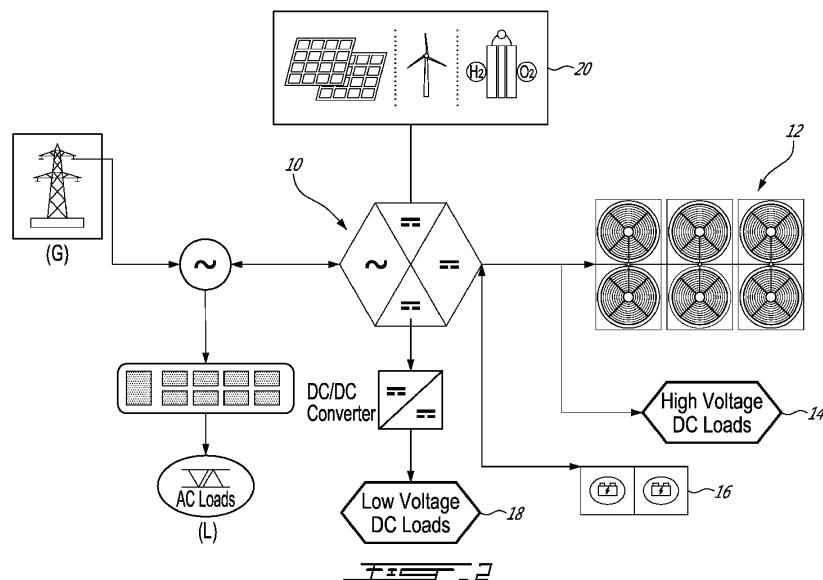

(57) Abstract: A method and system for power supply integration, comprising interfacing at least one of : i) an AC power supply and ii) a DC power supply, and supplying, from the at least one of : i) an AC power supply and a ii) a DC power supply, DC power to the at least one DC load. The energy supply to the at least one DC load from the at least one AC power supply and the at least one DC power supply is controlled so as to selectively supply power from renewable energies for example.

[Continued on next page]

GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))