



- (51) **International Patent Classification:**
H04W 72/10 (2009.01) *G01S 13/48* (2006.01)
- (21) **International Application Number:**
PCT/CN2022/076177
- (22) **International Filing Date:**
14 February 2022 (14.02.2022)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (71) **Applicants (for CN only):** **NOKIA SHANGHAI BELL CO., LTD.** [CN/CN]; 388 Ningqiao Road, Pudong Jin-qiao, Shanghai 201206 (CN). **NOKIA SOLUTIONS AND NETWORKS OY** [FI/FI]; Karakaari 7, 02610 Espoo (FI).
- (71) **Applicant (for all designated States except CN):** **NOKIA TECHNOLOGIES OY** [FI/FI]; Karakaari 7, 02610 Espoo (FI).
- (72) **Inventors:** **KEATING, Ryan**; 1712 N. Wood St. Unit 3W, Chicago, Illinois 60622 (US). **TAO, Tao**; 2-302, Jingao Road 988, Pudong, Shanghai 200432 (CN).
- (74) **Agent:** **ZY PARTNERS**; Suite 2606, Kuntai International Plaza, No.12, Chaowai Street, Chaoyang District, Beijing 100020 (CN).
- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.
- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
- (54) **Title:** APPARATUS, METHODS, AND COMPUTER PROGRAMS RELATED TO POSITIONING REFERENCE SIGNALS

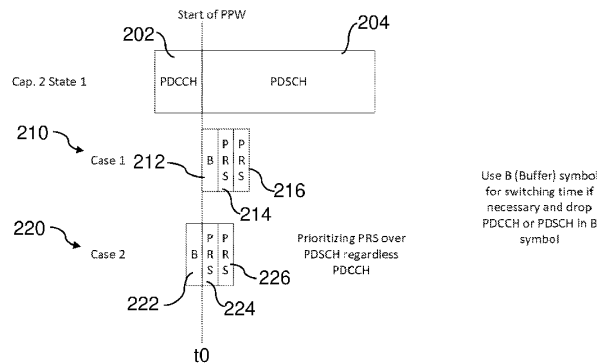


Fig. 2

(57) **Abstract:** There is disclosed a method comprising: receiving priority information indicative of a priority state of at least one positioning reference signal, receiving time window information configuring a time window that is outside of a measurement gap; and based on the priority information and the time window information, receiving one or more positioning reference signals during the time window by using one or more buffer symbols.

[Continued on next page]

TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*