(12) 特許協力条約に基づいて公開された国際出願

(19) 世界知的所有権機関
国際事務局

(43) 国際公開日
2013 年 2 月 28 日(28.02.2013)

WIPO | PCT

(10) 国際公開番号
WO 2013/027593 A1

(51) 国際特許分類:
A41G 3/00 (2006.01)

(21) 国際出願番号: PCT/JP2012/070319

(22) 国際出願日: 2012 年 8 月 9 日(09.08.2012)

(25) 国際出願の言語: 日本語

(26) 国際公開の言語: 日本語

(30) 優先権データ:
特願 2011-179669 2011 年 8 月 19 日(19.08.2011) JP

(71) 出願人 (米国を除く全ての指定国について): 株式会社アデランス **(Aderans Co., Ltd.)** [JP/JP]; 〒1600007 東京都新宿区荒木町１３番地４ Tokyo (JP).

(72) 発明者; および
(75) 発明者/出願人 (米国についてのみ): 宮武 信行 **(MIYATAKE, Nobuyuki)** [JP/JP]; 〒1600007 東京都新宿区荒木町１３番地４ 株式会社アデランス内 Tokyo (JP). 天貝 幸男**(AMAGAI, Yukio)** [JP/JP]; 〒1600007 東京都新宿区荒木町１３番地４ 株式会社アデランス内 Tokyo (JP).

(74) 代理人: 鮫島 睦, 外**(SAMEJIMA, Mutsumi** et al.); 〒5400001 大阪府大阪市中央区城見１丁目３番７号ＩＭＰビル青山特許事務所 Osaka (JP).

(81) 指定国 (表示のない限り、全ての種類の国内保護が可能): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) 指定国 (表示のない限り、全ての種類の広域保護が可能): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), ユーラシア (AM, AZ, BY, KG, KZ, RU, TJ, TM), ヨーロッパ (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


添付公開書類:
— 国際調査報告（条約第 21 条(3)）

WO 2013/027593 A1

(54) **Title**: LOCKING FITTING FOR WIG AND WIG USING SAME

(54) 発明の名称 : かつら用止着具およびこれを用いたかつら

[図1]

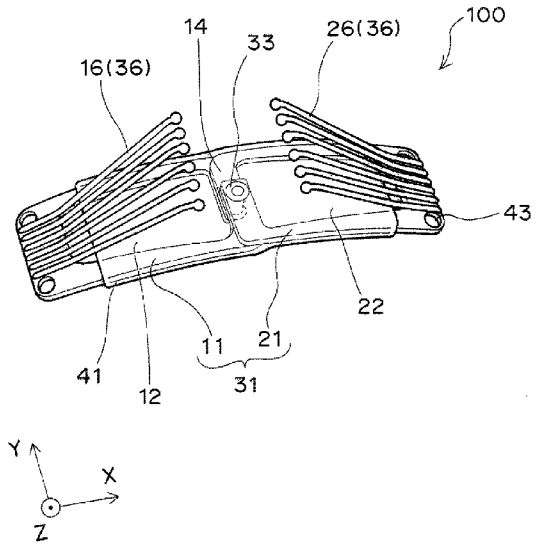

(57) **Abstract**: Provided are a locking fitting for a wig, which has sufficient holding force and can reliably secure a wig, and a wig using the same. This locking fitting for a wig is for securing a wig and includes: a stopper frame body having a first frame body, a second frame body, and a joining part in which parts where part of the first frame body and part of the second frame body overlap are joined; first comb teeth one end of which is secured to the first frame body and the teeth extending toward the inside of the first frame body from that one end with the other end being a free end; and second comb teeth one end of which is secured to the second frame body and the teeth extending toward the inside of the first frame body from that one end with the other end being a free end. The locking fitting for a wig is characterized by either of two states being selectable for the stopper frame body, a first state curved so as to protrude toward the upper surface side thereof and a second state that protrudes to the lower surface side thereof, and by the other end of the first comb teeth and the other end of the second comb teeth coming into contact with the stopper frame body or coming into the proximity of the same in the second state.

(57) 要約:

[続葉有]

十分な挟持力を有して、かつらを確実に固定できるかつら用止着具およびそれを用いたかつらを提供する　かつらを固定するためのかつら用止着具であって、第１の枠体と、第２枠体と、該第１の枠体の一部と該第２の枠体の一部とが重なった部分を接合した接合部とを有するストッパー枠体と、一端が前記第１の枠体に固定され、該一端から前記第１の枠体の内側に向かって延在し、他端が自由端である第１の櫛歯と、一端が前記第２の枠体に固定され、該一端から前記第１の枠体の内側に向かって延在し、他端が自由端である第２の櫛歯と、を含み、前記ストッパー枠体が、その上面側に突出するように湾曲した第１状態とその下面側に突出した第２状態との２つの状態を任意に選択でき、前記第１の櫛歯の前記他端と前記第２の櫛歯の前記他端とが前記第２状態において前記ストッパー枠体に接触または接近することを特徴とするかつら用止着具である。