



- (51) **International Patent Classification:**
F42C 19/12 (2006.01) *F42B 3/12* (2006.01)
- (21) **International Application Number:**
PCT/SE2013/000171
- (22) **International Filing Date:**
7 November 2013 (07.11.2013)
- (25) **Filing Language:** Swedish
- (26) **Publication Language:** English
- (71) **Applicant:** SAAB AB (publ) [SE/SE]; S-581 88
Linköping (SE).
- (72) **Inventors:** EDSTRÖM, Karl; Varvsgatan 3, SE-681 50
Kristinehamn (SE). ÖSTLUND, Johan; Kollergångsgatan
7, S-702 86 Örebro (SE).
- (74) **Agent:** ERICSSON, Dan; Nobeli Business Support AB,
Patents and Trademarks, S-691 80 Karlskoga (SE).
- (81) **Designated States** (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

- (84) **Designated States** (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

- (54) **Title:** ELECTRIC DETONATOR AND METHOD FOR PRODUCING AN ELECTRIC DETONATOR

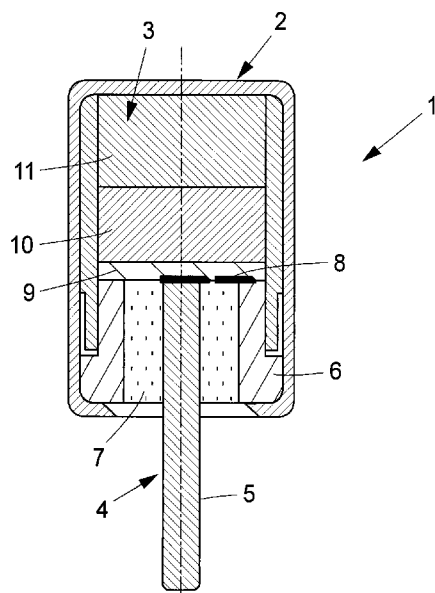


Fig.1

(57) **Abstract:** The present invention relates to an electric detonator (1) comprising a cap (2), comprising a priming charge (3) and an electrode (4), comprising a positive pole, a negative pole and a resistor element (8), the said priming charge (3) comprising at least two primary explosives, a first primary explosive (9) and a second primary explosive (10), and at least one secondary explosive (11). The electric detonator is characterized in that the two primary explosives (9, 10) and the secondary explosive (11) are arranged in layers, in an increasing degree of sensitivity, bearing one against the other, wherein the first primary explosive (9), constituting the most sensitive of the two primary explosives (9, 10), is arranged closest to the resistor element (8), and in that the second primary explosive (10) is arranged thereafter between the first primary explosive (10) and the secondary explosive (11). The invention also relates to a production method for the said electric detonator (1).