



- (51) International Patent Classification:
B65G 11/16 (2006.01)
- (21) International Application Number:
PCT/IN2013/000545
- (22) International Filing Date:
9 September 2013 (09.09.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
711/KOL/2013 14 June 2013 (14.06.2013) IN
- (71) Applicant: **TEGA INDUSTRIES LIMITED** [IN/IN];
147, Block-g, New Alipore, West Bengal, India, Kolkata 700 053 (IN).
- (72) Inventors: **KISHOR, Kaushal**; 147, Block-g, New Alipore, West Bengal, India, Kolkata 700 053 (IN). **ROY, Saroj Kumar**; 147, Block-g, New Alipore, West Bengal, India, Kolkata 700 053 (IN). **YAVAR, Imam Syed**; 147, Block-g, New Alipore, West Bengal, India, Kolkata 700 053 (IN). **PANIGRAHI, Arunlal**; 147, Block-G, New Alipore, Kolkata 700 053, West Bengal (IN).
- (74) Agents: **SAHA MONAJ** et al.; S. S. Datta & Associates,
288/1, B.B. Chatterjee Road, Ground Floor, West Bengal,
India, Kolkata 700 042 (IN).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: AN IMPROVED LINER

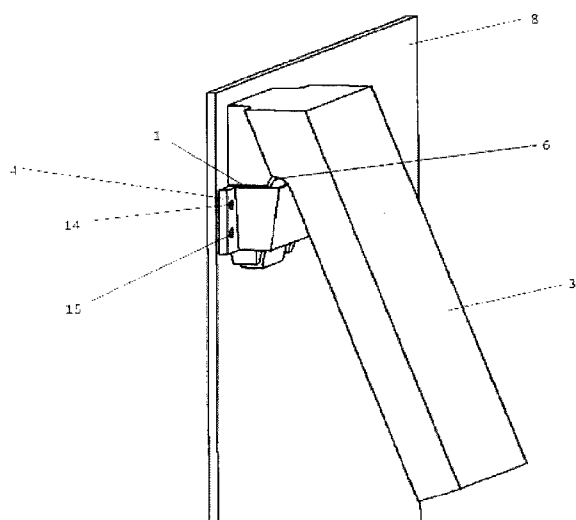


FIG 1a

(57) Abstract: A wedge shaped liner has a back portion (1) and a front portion(3). The back portion is fixed with the chute or hopper wall(8) with the help of a bracket (4). The back portion(1) and the front portion(3) are connected by a curved portion(6), adapted to be adequately flexible and capable of good heat dissipation.

WO 2014/199390 A1



Published:

— *with international search report (Art. 21(3))*