



(51) International Patent Classification:

G01S 5/16 (2006.01) H04R 1/02 (2006.01)
F16M 7/00 (2006.01)

(21) International Application Number:

PCT/CA2012/050898

(22) International Filing Date:

14 December 2012 (14.12.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

13/327,540 15 December 2011 (15.12.2011) US

(72) Inventors; and

(71) Applicants : ATKINSON, Darren Glen [CA/CA]; 37
Winnifred Avenue, Toronto, Ontario M4M 2X2 (CA).
HAUGHTON, Keith Louis [CA/CA]; Suite 414, 75
Broadway Avenue, Toronto, Ontario M4P 1V1 (CA).

(74) Agent: HILL & SCHUMACHER; 264 Avenue Road,
Toronto, Ontario M4V 2G7 (CA).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

— with amended claims (Art. 19(1))

Date of publication of the amended claims: 29 August 2013

(54) Title: LOCATING AND RELOCATING DEVICE

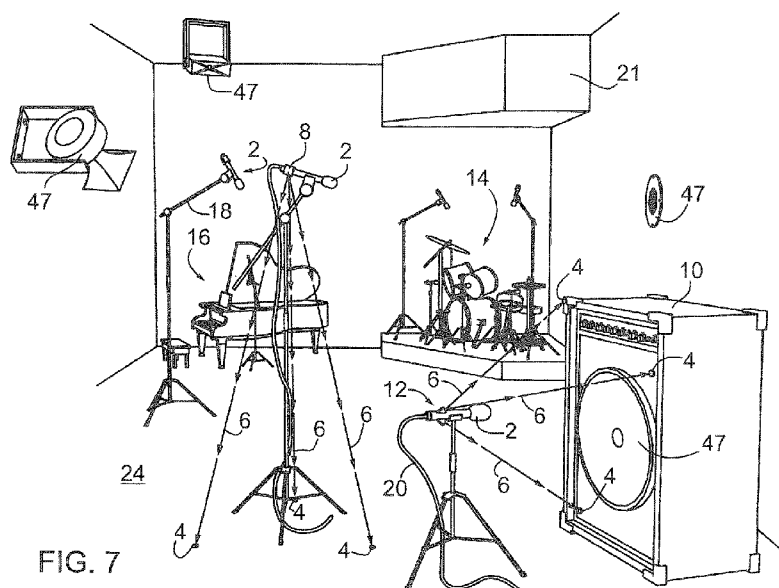


FIG. 7

(57) Abstract: A relocating device for locating and relocating a first object relative to a second object includes at least one light source, and a power source. The at least one light source is for producing at least two beams of light wherein each beam of light is capable of defining a beam location point on the second object. The at least one light source is operably connected to the first object. The power source is operably connected to the at least one light source. The relocating device also includes a means for defining the beam location point. A method of locating and relocating a first object relative to a second object is also disclosed.

