



PCT


(10) International Publication Number
WO 2006/121784 A1

(43) International Publication Date
16 November 2006 (16.11.2006)

- | | | |
|--|-----------------------------------|--|
| (51) International Patent Classification: | | Court, Del Mar, CA 92014 (US). STEWART, Richard, A. |
| <i>G09G 3/34</i> (2006.01) | <i>G09G 3/20</i> (2006.01) | [US/US]; 3165 Dove Street, San Diego, CA 92103 (US). |
| (21) International Application Number: | | (74) Agent: ARNO, Thomas, R.; KNOBBE MARTENS OL- |
| | PCT/US2006/017232 | SON & BEAR LLP, 2040 Main Street, 14th Floor, Irvine, |
| (22) International Filing Date: | 4 May 2006 (04.05.2006) | (81) Designated States (<i>unless otherwise indicated, for every</i> |
| (25) Filing Language: | English | <i>kind of national protection available</i>): AE, AG, AL, AM, |
| (26) Publication Language: | English | AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, |
| (30) Priority Data: | | CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, |
| 60/678,482 | 5 May 2005 (05.05.2005) | US |
| (71) Applicant (<i>for all designated States except US</i>): QUAL- | | KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, |
| COMM MEMS TECHNOLOGIES, INC. [US/US]; | | LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, |
| 5775 Morehouse Drive, San Diego, CA 92121 (US). | | NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, |
| | | SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, |
| | | UZ, VC, VN, YU, ZA, ZM, ZW. |
| (72) Inventors; and | | (84) Designated States (<i>unless otherwise indicated, for every</i> |
| (75) Inventors/Applicants (<i>for US only</i>): MOE, Douglas, H. | | <i>kind of regional protection available</i>): ARIPO (BW, GH, |
| [US/US]; 3049 Camarillo Avenue, Oceanside, CA 92056 | | GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, |
| (US). ANTONIO, Franklin, P. [US/US]; 2765 Cordoba | | ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), |
| | | European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, |

[Continued on next page]

(54) Title: DYNAMIC DRIVER IC AND DISPLAY PANEL CONFIGURATION

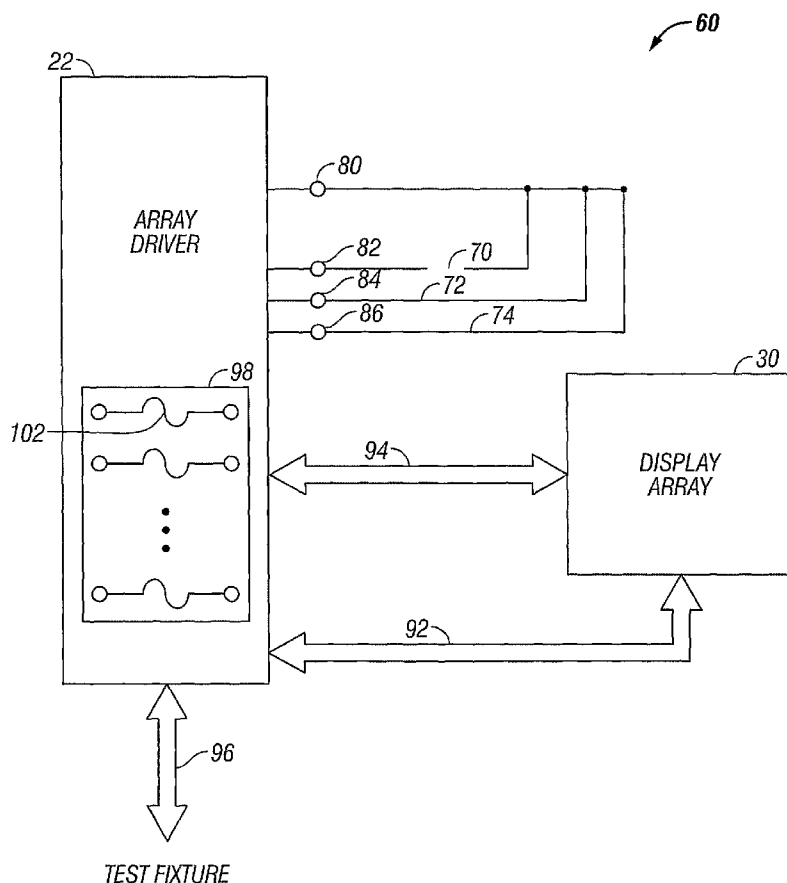

(57) Abstract: A display device which can provide configuration information to the driver circuit and methods of manufacturing and operating the same are disclosed. In one embodiment, a display device comprises a display array and a collection of links configured to store information related to the display array.



FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT,
RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments*

Published:

— *with international search report*

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*