

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
23 September 2004 (23.09.2004)

PCT

(10) International Publication Number
WO 2004/082077 A1

(51) International Patent Classification⁷: **H01R 12/18**,
13/631

(74) Agent: **ZEITLER, Robert, J.**; Molex Incorporated, 2222
Wellington Court, Lisle, IL 60532 (US).

(21) International Application Number:
PCT/US2004/005106

(22) International Filing Date: 20 February 2004 (20.02.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/384,336 7 March 2003 (07.03.2003) US

(71) Applicant (for all designated States except US): **MOLEX
INCORPORATED** [US/US]; 2222 Wellington Court,
Lisle, IL 60532 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **POH, Edmund**
[SG/US]; 6089 Miller Lane, Lisle, IL 60532 (US).
SOMMERS, Scott, D. [US/US]; 1703 Baybrook Lane,
Naperville, IL 60564 (US).


(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,
GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:
— with international search report

[Continued on next page]

(54) Title: CONNECTOR WITH FORCE ISOLATING EJECTOR SYSTEM

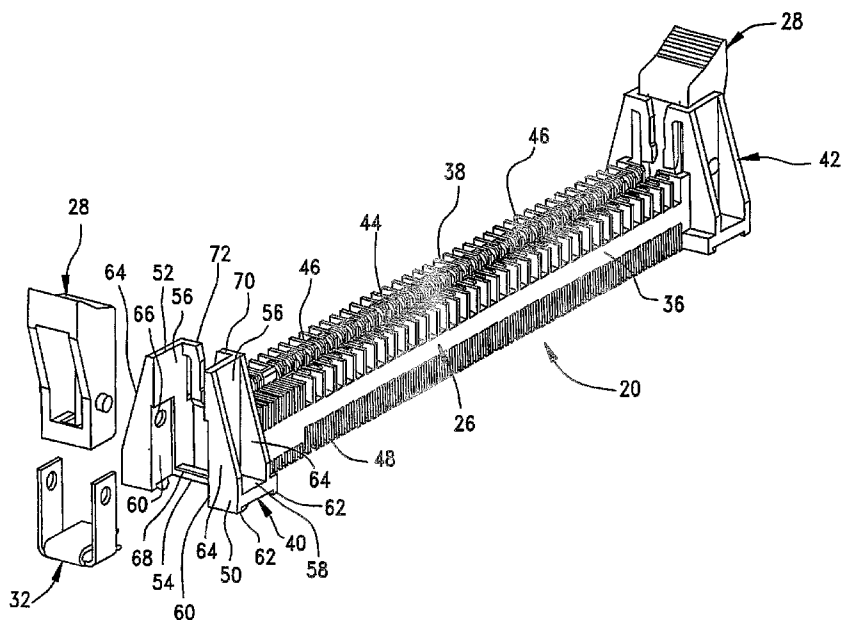

(57) Abstract: A connector is provided for mounting a module, such as a voltage regulator module, to a printed circuit board. The connector includes a housing having side walls defining a slot for receiving a module, such as a voltage regulator module, therein. Terminals are provided in the housing and are in communication with the slot. Latches and solder nails are provided at opposite ends of the side walls. The solder nails and latches may be formed as two separate components which are connected together or may be integrally formed. When a force, such as from vibration and/or shock, is applied to the latches, the force is transmitted directly to the solder nail and directed away from the leads.

WO 2004/082077 A1



— *with amended claims*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.