



## (51) International Patent Classification:

H04N 5/378 (2011.01) H04N 5/347 (2011.01)  
H04N 5/341 (2011.01)

## (21) International Application Number:

PCT/JP2015/051949

## (22) International Filing Date:

20 January 2015 (20.01.2015)

## (25) Filing Language:

English

## (26) Publication Language:

English

## (30) Priority Data:

2014-021703 6 February 2014 (06.02.2014) JP  
2014-231974 14 November 2014 (14.11.2014) JP

(71) Applicant: CANON KABUSHIKI KAISHA [JP/JP]; 30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, 1468501 (JP).

(72) Inventor: IWAHARA, Tomonaga; c/o CANON KABUSHIKI KAISHA, 30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, 1468501 (JP).

(74) Agents: OHTSUKA, Yasunori et al.; 7th FL., KIOICHO PARK BLDG., 3-6, KIOICHO, CHIYODA-KU, Tokyo, 1020094 (JP).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

## Published:

— with international search report (Art. 21(3))

(54) Title: IMAGE CAPTURING APPARATUS AND METHOD OF CONTROLLING THE SAME

FIG. 3

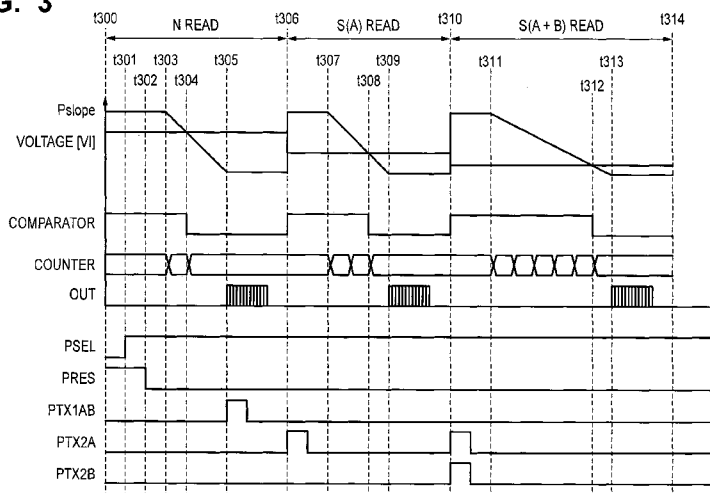

(57) Abstract: An image capturing apparatus includes a plurality of unit pixels arranged in matrix and each including a plurality of photoelectric conversion portions, and an AD converter configured to receive a signal from each unit pixel via a vertical signal line and operate in the first AD conversion mode when being set in the first readout mode, and operates in the second AD conversion mode different from the first AD conversion mode when being set in the second readout mode. The first readout mode is a mode of independently outputting signals from a plurality of photoelectric conversion portions to a corresponding vertical signal line. The second readout mode is a mode of composing and outputting signals from a plurality of photoelectric conversion portions to a corresponding vertical signal line.