



(43) International Publication Date
27 December 2012 (27.12.2012)

(51) International Patent Classification:
G02B 5/00 (2006.01)

(21) International Application Number:
PCT/US2012/042889

(22) International Filing Date:
18 June 2012 (18.06.2012)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
13/166,419 22 June 2011 (22.06.2011) US

(72) Inventors; and

(71) Applicants : WERJEFELT, Bertil, R., I. [US/US]; 44-226 Mala'e Place, Kaneohe, HI 96744 (US). WERJEFELT, Alexander, K. [US/US]; 44-266 Mala'e Place, Kaneohe, HI 96744 (US). WERJEFELT, Christian [US/US]; 44-226 Mala'e Place, Kaneohe, HI 96744 (US).

(74) Agent: DE LEON, Josefino, P.; Shlesinger, Arkwright & Garvey LLP, 5845 Richard Highway, Suite 415, Alexandria, VA 22303 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: GLARE SHIELD EQUIPPED WITH AN EMERGENCY VISION APPARATUS

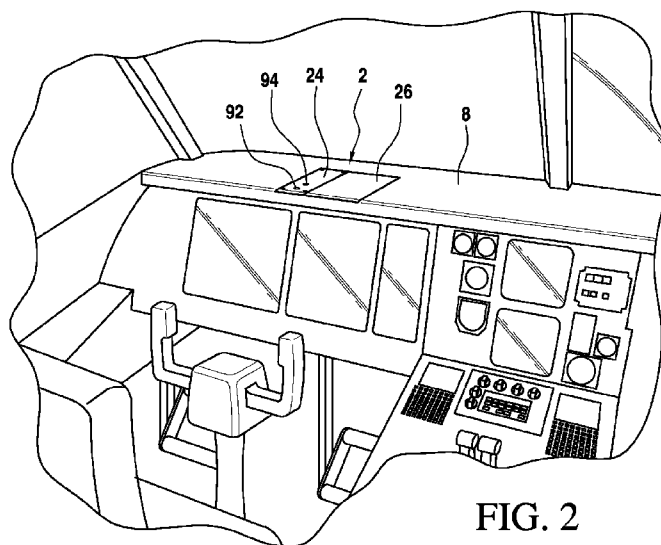


FIG. 2

(57) Abstract: A glare shield equipped with an emergency vision apparatus comprises a glare shield in a cockpit and a compartment recessed into the glare shield. A blower is disposed within the compartment. An inflatable first enclosure made of airtight material and having an expanded form when deployed and a deflated form when not in use is connected to the blower with a tubular air passageway. The first enclosure when in the deflated form is stored within the compartment. First and second clear members are disposed at respective first and second ends of the enclosure to enable a user to see through the first enclosure when expanded and observe a source of information at a distal end of the first enclosure while smoke or other particulate matter is in the environment. A switch operably is associated with the blower to activate the blower and thereby inflate the first enclosure when deployed.



WO 2012/177538 A1