



(51) International Patent Classification:

B24D 3/28 (2006.01) **B24B 37/24** (2012.01)
B24D 11/00 (2006.01) **B24B 37/26** (2012.01)

(21) International Application Number:

PCT/FI2013/050216

(22) International Filing Date:

26 February 2013 (26.02.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant: **KWH MIRKA LTD** [FI/FI]; Pensalavägen
210, FI-66850 Jeppo (FI).

(72) Inventors: **ESTEBAN, Beatriz**; Kvarnbacksgatan 4 B 17,
FI-68600 Jakobstad (FI). **HÖGLUND, Göran**; Bor-
garegatan 5 E 21, FI-66900 Nykarleby (FI). **HEDE, Hans**;
Vöråvägen 31, FI-66600 Vörå (FI). **KASS, Markus**;
Sandövägen 8, FI-68910 Bennäs (FI). **SUNDELL, Mats**;
Sjövägen 52, FI-66970 Hirvlax (FI).

(74) Agent: **TAMPEREEN PATENTTITOIMISTO OY**;
Hermiankatu 1 B, FI-33720 Tampere (FI).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: A METHOD TO PROVIDE AN ABRASIVE PRODUCT SURFACE AND ABRASIVE PRODUCTS THEREOF

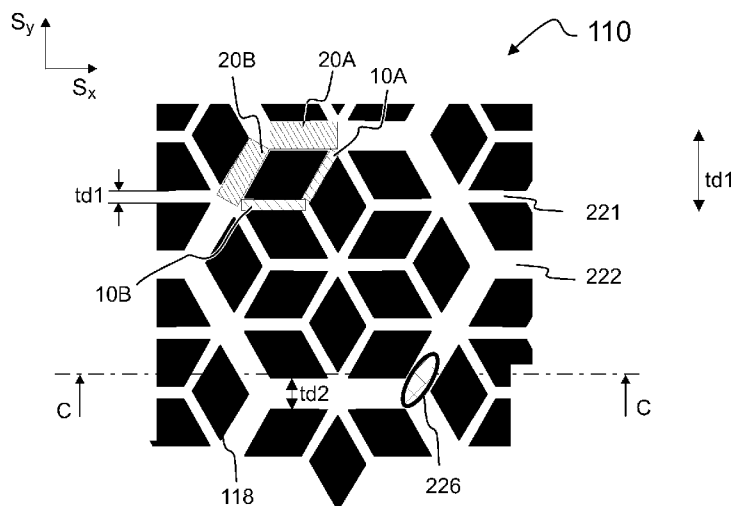


Fig. 9

(57) Abstract: The invention relates to obtaining an abrasive product comprising a surface with multiple abrasive zones supported by a backing layer. The abrasive zones are surrounded by interconnected channel portions comprising first channel portions with a first transverse dimension td1 and second channel portions with a second transverse dimension td2 larger than the first transverse dimension td1.