

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
21 May 2004 (21.05.2004)

PCT

(10) International Publication Number
WO 2004/042937 A2

(51) International Patent Classification⁷: **H04B**
(21) International Application Number:
PCT/US2003/034749
(22) International Filing Date: 30 October 2003 (30.10.2003)
(25) Filing Language: English
(26) Publication Language: English
(30) Priority Data:
60/423,218 31 October 2002 (31.10.2002) US
60/471,227 16 May 2003 (16.05.2003) US
10/690,655 21 October 2003 (21.10.2003) US

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant: QUALCOMM INCORPORATED [US/US];
5775 Morehouse Drive, San Diego, CA 92121 (US).

Published:


— without international search report and to be republished upon receipt of that report

(72) Inventor: CICCARELLI, Steven, C.; 1526 Valleda Lane,
Encinitas, CA 92024 (US).

(74) Agents: WADSWORTH, Philip, R. et al.; QUALCOMM Incorporated, 5775 Morehouse Drive, San Diego, CA 92121 (US).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DYNAMICALLY PROGRAMMABLE RECEIVER

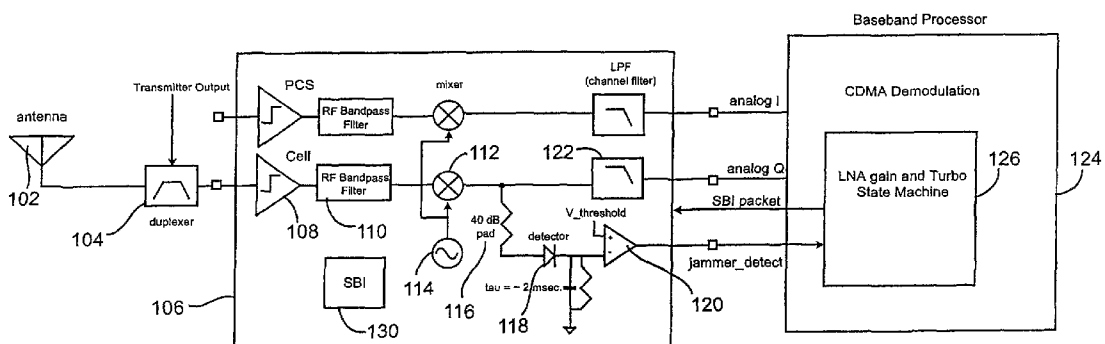

(57) Abstract: Disclosed is a novel and improved dynamically programmable linear receiver which provides the required level of system performance with reduced power consumption. In one embodiment, disclosed is a programmable receiver coupled to a jammer detector for detecting the presence of jamming in an RF signal, the jammer detector coupled to a state machine, and the state machine having means for controlling the receiver based on the results of the jammer detector detecting the presence of jamming in the RF signal. The disclosed receiver is capable of detecting the presence of jammers, with a means to adjust the bias current downward if no jammers are present, which improves the receiver's standby time and prolongs battery life.

WO 2004/042937 A2