



(51) International Patent Classification:

F04D 25/06 (2006.01) *F04D 25/02* (2006.01)
F04D 31/00 (2006.01) *F04D 29/58* (2006.01)
F04D 29/06 (2006.01) *E21B 43/12* (2006.01)
F04D 13/08 (2006.01) *F04C 15/00* (2006.01)
F04D 13/02 (2006.01)

(21) International Application Number:

PCT/US2012/054832

(22) International Filing Date:

12 September 2012 (12.09.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(72) Inventors; and

(71) Applicants : **CUNNINGHAM, Christopher E.** [US/US];
2431 Randal Point Court, Spring, Texas 77388 (US).
HUYNH, Co Si [US/US]; 16323 Shoemaker Avenue, Cer-
ritos, California 90703 (US).

(74) Agents: **GRISWOLD, Joshua A.** et al.; Fish & Richard-
son P.C., P.O. Box 1022, Minneapolis, Minnesota 55440-
1022 (US).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: SUBSEA MULTIPHASE PUMP OR COMPRESSOR WITH MAGNETIC COUPLING AND COOLING OR LUBRIC-
ATION BY LIQUID OR GAS EXTRACTED FROM PROCESS FLUID

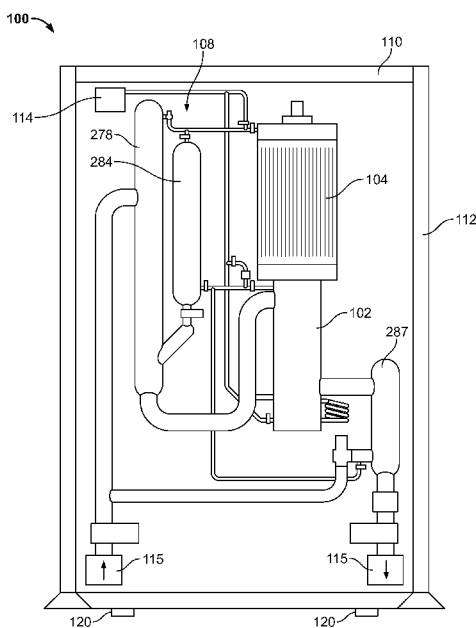


FIG. 1

(57) Abstract: A submersible fluid system for operating submersed in a body of water includes an electric machine and a fluid-end. The fluid-end includes a fluid-end housing having an inlet to a fluid rotor, the fluid rotor coupled to the electric machine and carried to rotate in the housing by a bearing in the housing. A fluid separator system receives a multiphase fluid and communicates a flow of the fluid to the inlet and a substantially liquid flow extracted from the multiphase fluid to the bearing.