



(51) International Patent Classification:

B01D 17/02 (2006.01) **B03D 1/26** (2006.01)
B03D 1/16 (2006.01) **E21B 43/34** (2006.01)

(21) International Application Number:

PCT/GB2009/001031

(22) International Filing Date:

22 April 2009 (22.04.2009)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

0809603.4 28 May 2008 (28.05.2008) GB

(71) Applicant (for all designated States except US): **VWS WESTGARTH LIMITED** [GB/GB]; Orbital House, 3 Redwood Crescent, East Kilbride, Glasgow G74 5PR (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **LANGE, Neville, Ernest** [GB/GB]; 109 Seymour Road, Gloucester GL1 5PT (GB). **SEVERING, Kenneth, Wayne** [US/US]; 1220 Brookdale Avenue, La Habra, CA 90631 (US).

(74) Agents: **DOCHERTY, Andrew et al.**; Marks & Clerk, 19 Royal Exchange Square, Glasgow G1 3AE (GB).

(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every

kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: FLUID TREATMENT APPARATUS

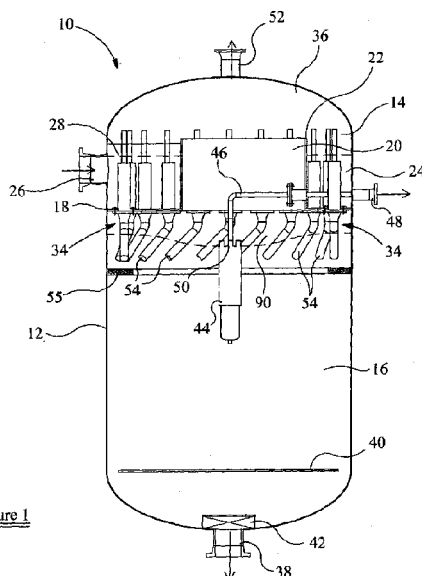


Figure 1

(57) Abstract: A fluid treatment apparatus (10) comprises a fluid vessel (12) having first and second fluid chambers (14, 16). A fluid inlet (26) is provided for delivering a fluid to be treated into the first fluid chamber (14). At least one nozzle assembly (34) is arranged between the first and second chambers (14, 16) to providing fluid communication from the first fluid chamber (14) to the second fluid chamber (16), wherein said nozzle assembly (34) is adapted to facilitate mixing of a gas with said fluid.