

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
11 October 2001 (11.10.2001)

PCT

(10) International Publication Number
WO 01/75235 A1

- (51) International Patent Classification⁷: **E02F 3/88** (74) Agent: CURO AS; P.O. Box 38, N-7231 Lundamo (NO).
- (21) International Application Number: PCT/NO01/00143 (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (22) International Filing Date: 4 April 2001 (04.04.2001)
- (25) Filing Language: Norwegian
- (26) Publication Language: English
- (30) Priority Data:
20001743 5 April 2000 (05.04.2000) NO
- (71) Applicant (*for all designated States except US*): GTO-SUBSEA AS [NO/NO]; Leira, N-6590 Tustna (NO).
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): JACOBSEN, Tom [NO/NO]; Oscar Wistingsveg 54, N-7020 Trondheim (NO). FAGERVOLD, Terje [NO/NO]; Leira, N-6590 Tustna (NO). FAGERVOLD, Gunnar [NO/NO]; Roelbakken 5, N-7168 Lysöysundet (NO). KVALVÅG, Gustav [NO/NO]; N-6523 Frei (NO).
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
— with amended claims
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: METHOD AND DEVICE FOR SUBSEA DREDGING

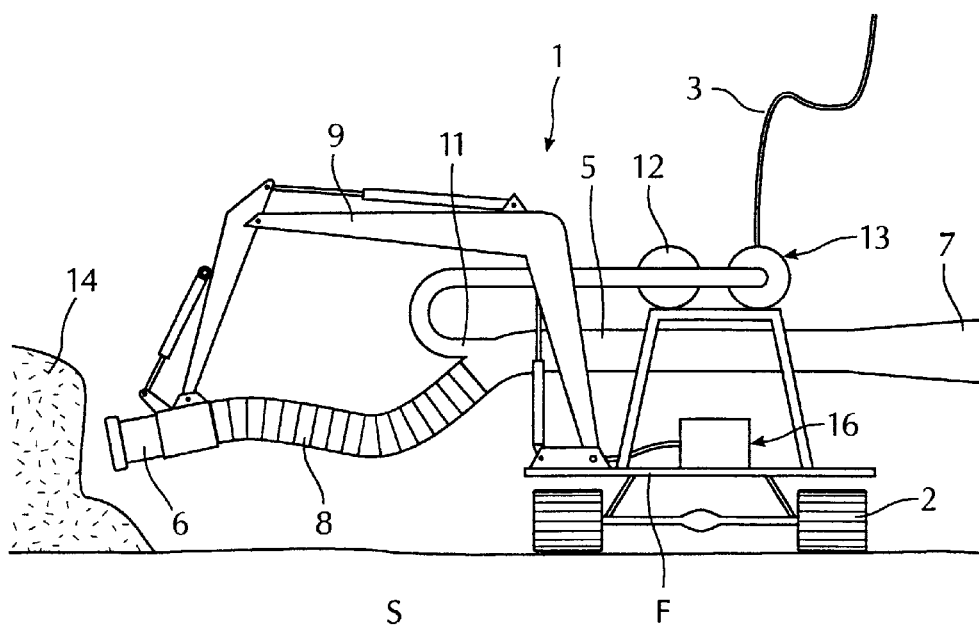

(57) Abstract: Method and device for moving subsea rocks and sediments, also at significant depths, e.g. in connection with removal of protective rocks around subsea installations, where maintenance is to be conducted. The device comprises a rigid or at least partly flexible tubing (5) through which the masses (14) may be transported with the aid of a pressure gradient produced by an ejector nozzle (11) arranged externally in relation to said tubing. The nozzle (11) is fed with water from a water pump (12). The device further comprises a chassis (F) adapted to be transported along the (sea) bottom. The required power is arranged to be supplied through a cable (3) from the surface, while the tubing (5) preferably is arranged to be remotely controlled by a manipulator (9, 9').