



(51) International Patent Classification:
H01H 13/02 (2006.01) *H01H 9/16* (2006.01)
H01H 13/83 (2006.01)

(21) International Application Number:
PCT/EP2009/058507

(22) International Filing Date:
6 July 2009 (06.07.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
08159733.8 4 July 2008 (04.07.2008) EP
61/078,663 7 July 2008 (07.07.2008) US

(71) Applicant (for all designated States except US): MEC A/
S [DK/DK]; Industriparken 23, DK-2750 Ballerup (DK).

(72) Inventor; and

(75) Inventor/Applicant (for US only): ENOCH, Claus [DK/
DK]; Magnoliavej 9, Strøby Egede, DK-4600 Køge (DK).

(74) Agents: FOGED, Søren et al.; P.O. Box 45, Kogle Allé
2, DK-2970 Hørsholm (DK).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT,
TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: AN ILLUMINATABLE SWITCH

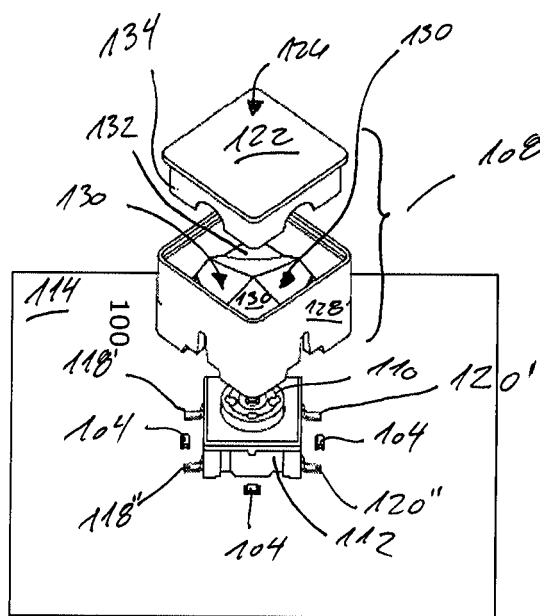


Fig. 9

(57) Abstract: An arrangement of an illuminatable electrical switch and one or more light emitting elements on a circuit board, the illuminatable electrical switch comprising : a switching device, an actuator with a waveguide which is adapted to allow visible light to be transmitted therethrough. The one or more light emitting elements are arranged with respect to the waveguide such light emitted by the light emitting elements, is transmitted through the waveguide whereby the light is visible from an outer surface of the actuator.