



(51) International Patent Classification:

E02F 3/92 (2006.01) *E02F 3/88* (2006.01)
E02F 3/90 (2006.01)

(21) International Application Number:

PCT/NL2013/050935

(22) International Filing Date:

20 December 2013 (20.12.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2010030 20 December 2012 (20.12.2012) NL

(71) Applicant: IHC SYSTEMS B.V. [NL/NL]; Industrieweg
30, NL-3361 HJ Slidrecht (NL).

(72) Inventor: DE KEIZER, Cornelis; Assumburg 39, NL-
3328 BC Dordrecht (NL).

(74) Agent: NEDERLANDSCH OCTROOIBUREAU; J.W.
Frisolaan 13, NL-2517 JS The Hague (NL).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: DREDGING ARRANGEMENT FOR DREDGING MATERIAL FROM AN UNDERWATER BOTTOM

Fig. 1

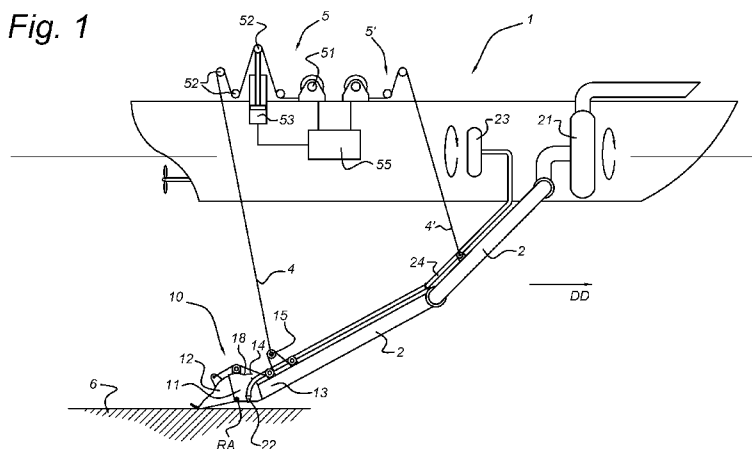

(57) Abstract: The invention relates to a dredging arrangement for dredging material from an underwater bottom (6). The dredging arrangement comprises a drag head (10) and a suction pipe (2). The drag head (10) comprises a drag head body (11) which is attachable to the suction pipe (2). The drag head (10) comprises at least one moveable part (12, 14), such as a visor and a valve, which can be controlled to change the dredging characteristics of the drag head (10). The dredging arrangement comprises wire connector (15) and transferring device (16). The wire connector (15) being connectable to a wire (4) via which a pulling force can be applied, wherein the transferring device (16) are arranged to transfer the pulling force to the at least one moveable part (12, 14) to control the characteristics that part.

