

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
21 August 2003 (21.08.2003)

PCT

(10) International Publication Number
WO 03/068515 A1

(51) International Patent Classification⁷: **B41J 3/39**

KIA [AU/AU]; Silverbrook Research Pty Ltd, 393 Darling Street, Balmain, New South Wales 2041 (AU).

(21) International Application Number: PCT/AU03/00154

(22) International Filing Date: 12 February 2003 (12.02.2003)

(74) Agent: **SILVERBROOK, KIA**; Silverbrook Resesarch pty Ltd, 393 Darling Street, Balmain, New South Wales 2041 (AU).

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PS 0484 13 February 2002 (13.02.2002) AU

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(71) Applicant (*for all designated States except US*): **SILVERBROOK RESEARCH PTY. LTD.** [AU/AU]; 393 Darling Street, Balmain, New South Wales 2041 (AU).

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),


(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **SILVERBROOK,**

[Continued on next page]

(54) Title: MANUALLY MOVEABLE PRINTER WITH SPEED SENSOR

(57) Abstract: A manually moveable printer (20) is designed to print onto a page of print media (20) as a user swipes (21) the printer across the page. The printer has a printhead arrangement, which includes a number of ink ejection nozzles. The printer has a speed sensor designed to measure the speed at which the printhead arrangement is moved relative to the print media and to generate speed data. The printer also has a print controller designed to receive image data from an image source, convert the image data into a number of drop ejection signals, receive the speed data from the speed sensor and operate the ink ejection nozzles. The nozzles are operated in accordance with the drop ejection control signals at a rate determined using the speed data.

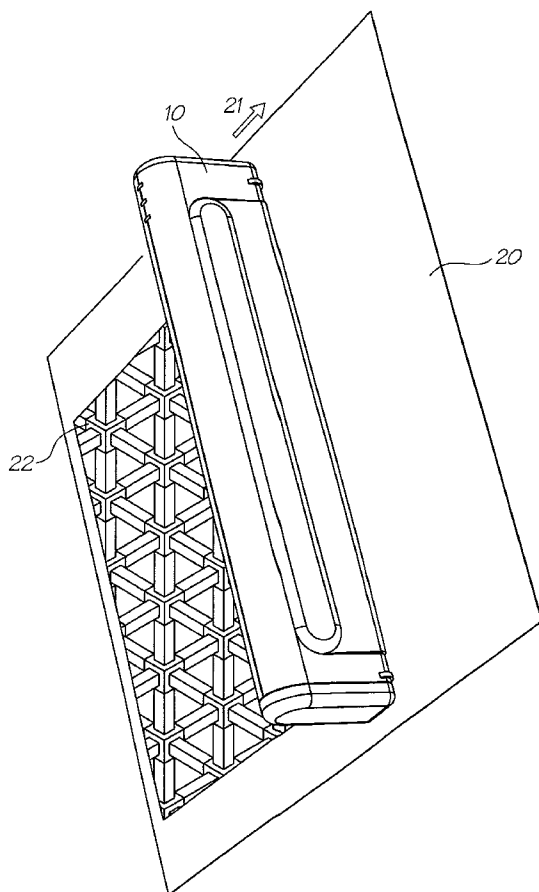

WO 03/068515 A1



European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*