(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
24 December 2014 (24.12.2014)

WIPO | PCT

(10) International Publication Number
WO 2014/202236 A1

(51) International Patent Classification:
G01L 1/12 (2006.01) *B66B 5/00* (2006.01)
G01L 3/10 (2006.01) *G01B 7/02* (2006.01)
F16D 66/02 (2006.01)

(21) International Application Number:
PCT/EP2014/052783

(22) International Filing Date:
13 February 2014 (13.02.2014)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
13173284.4 21 June 2013 (21.06.2013) EP

(71) Applicant: **INVENTIO AG** [CH/CH]; Seestrasse 55, 6052 Hergiswil (CH).

(72) Inventor: **MAY, Lutz**; Etztalstraße 14, 82335 Berg (DE).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

(54) Title: ELEVATOR BRAKE FORCE AND DISTANCE SENSOR

(57) Abstract: Elevator brake system and elevator brake pads having embedded a sensor arrangement so as to detect relevant parameters of an elevator brake system and elevator brake pad.

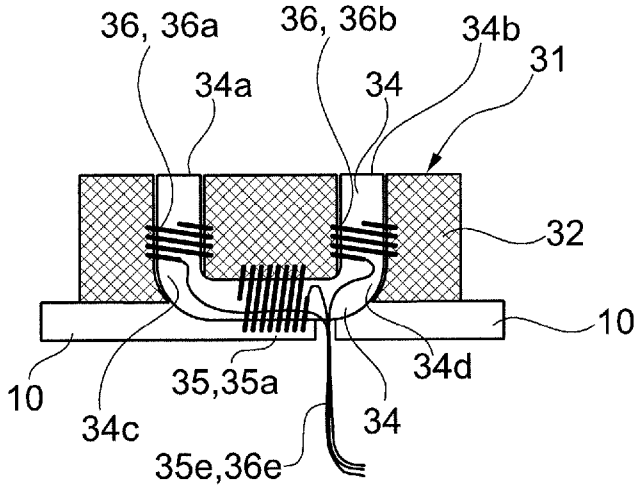


Fig. 8

WO 2014/202236 A1