



(51) International Patent Classification:

F04C 9/00 (2006.01) *F04C 28/14* (2006.01)
F04C 29/12 (2006.01) *F04C 15/06* (2006.01)
F04C 21/00 (2006.01)

(21) International Application Number:

PCT/AU2010/001518

(22) International Filing Date:

12 November 2010 (12.11.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2009905514 12 November 2009 (12.11.2009) AU

(71) Applicant (for all designated States except US): **EXODUS R & D PTY LTD** [AU/AU]; 44 Commercial Road, Salisbury, South Australia 5108 (AU).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **FLENCHÉ, George** [AU/AU]; 5 Dyer Street, Elizabeth Downs, South Australia 5113 (AU).

(74) Agent: **LESICAR PERRIN**; 58 Rundle Street, Kent Town, South Australia 5067 (AU).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: IMPROVED FLUID COMPRESSOR AND/OR PUMP ARRANGEMENT

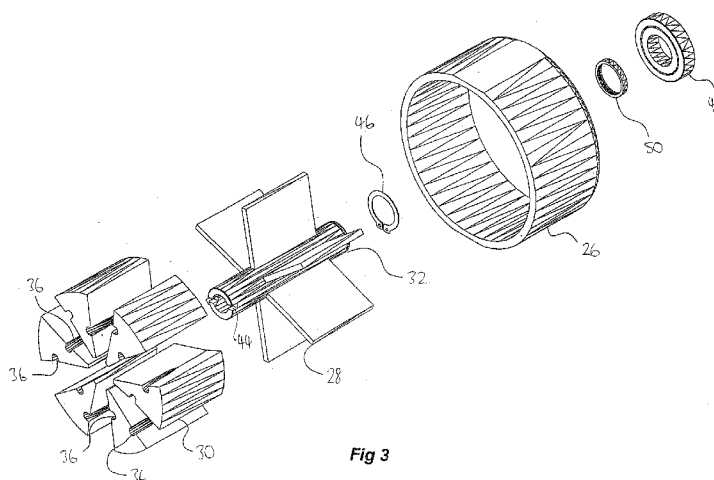


Fig 3

(57) Abstract: The present invention relates to a compressor or pump unit for the production or flow of compressed fluid and more particularly to a new uniquely designed compressor which has the capabilities to both draw fluid from an intake opening and direct dischargeable compressed fluid to a storage tank utilising a single compressor chamber simultaneously.