

Description

BACKGROUND OF THE INVENTION

5 The present invention relates to a method of making silicone foam having reduced foam density and to silicone foam compositions used in such method. More particularly, the present invention relates to the use of a platinum catalyst which can have the form of a mixture of platinum vinyl siloxane and platinum triarylphosphine. EP-A-0182611 discloses platinum-phosphine-vinylsiloxane complexes.

10 Prior to the present invention, elastomeric silicone foams were well-known. They have a variety of uses such as thermal and electrical insulators, flame barriers, and cushions (compare GB-A-2065661). Even though elastomeric silicone foams are superior to organic foams in many instances, organic foams are often used based on economic consideration.

15 At the present time, commercially available silicone foam has a foam density which can provide a 0.24-0.4g/cm³ (15-25 pound/cubic ft.) foam structure. One method of reducing the cost of elastomeric silicone foam, is to reduce foam density without altering the desirable physical properties of the foam material.

20 Although silicone foam may be made by using a blowing agent, or even mechanical mixing, another technique is by effecting the generation of hydrogen gas using a platinum catalyst as shown by Smith, U.S. Patent 3,923,705. Elastomeric silicone foams can be made by forming a mixture of a silanol, a silicone hydride, and a vinyl-containing silicone in the presence of a platinum catalyst. There is effected the simultaneous generation of hydrogen gas along with cross-linking. For example, Modic, U.S. Patent 4,189,545 produces silicone foam by adding water to a composition of a vinyl-containing siloxane, a hydride-containing siloxane and platinum to generate hydrogen simultaneously with cross-linking. Modic, U.S. Patent 4,418,157 shows the strengthening of silicone foam by adding a resinous copolymer, while Bauman et al., U.S. Patent 4,599,367 reduces silicone foam density by using a combination of silanol and water.

25 The present invention is based on the discovery that a substantial reduction in silicone foam density can be achieved by utilizing a platinum catalyst in the form of a mixture of a platinum vinyl siloxane complex and a platinum triaryl phosphine to effect the generation of hydrogen in a foamable composition comprising vinyl-terminated polydiorganosiloxane, a vinyl-containing organosiloxane, a hydride polysiloxane, and a hydroxylated material, all of which materials are defined more particularly below. It also has been found that the employment of a small amount, such as 0.5% to 10% by weight of the total foamable mixture, of fumed silica, treated with cyclic organosiloxane, such as octamethyl cyclotetrasiloxane, results in a significant improvement in the cell structure of the cured foam.

35 STATEMENT OF THE INVENTION

There is provided by the present invention a foamable composition as defined in Claim 1.

Advantageous embodiments of said composition are subject matter of Claims 2 to 5.


40 6. There is also provided by the present invention the method of making silicone foam as defined in Claim 6.

There can be used as the vinyl-terminated polydiorganosiloxane, (component (A) in the Statement of the Invention) polydiorganosiloxane fluids having a viscosity from about 100 to about 1,000,000 mPa.s (centipoise) at 25°C, and preferably from about 2500 to 500,000 mPa.s (centipoise). The vinyl-substitution in the vinyl-terminated polydiorganosiloxane ranges of from about 0.0002 to 3% by weight, and preferably from about 0.001 to about 1% by weight of vinyl-terminated polydiorganosiloxane. The vinyl-terminated polydiorganosiloxane is preferably terminated with vinyl-diorganosiloxy units, and the organo radicals of the vinyl-terminated polydiorganosiloxane are selected from C₍₁₋₂₀₎ monovalent hydrocarbon radicals or C₍₁₋₂₀₎ monovalent hydrocarbon radicals substituted with radicals inert during equilibration.

50 There are included by the organo radicals of the vinyl-terminated polydiorganosiloxane alkyl radicals such as methyl, ethyl, propyl, etc.; cycloalkyl radicals, such as cyclohexyl, cycloheptyl, etc.; haloalkyl radicals such as trifluoropropyl; aryl radicals, for example, phenyl, tolyl, xylyl, naphthyl; haloaryl radicals such as chlorophenyl, nitrotolyl, nitrophenyl, etc.; alkenyl radicals such as vinyl, allyl. It is preferred that the organo radicals are selected from methyl, phenyl, vinyl, and 3,3,3-trifluoropropyl.

55 The vinyl-terminated polydiorganosiloxanes are well-known in the art and can be made, for example, by equilibrating cyclic polydiorganosiloxanes with or without vinyl substitution in the presence of appropriate amount of a vinyl chain-stopper such as a 1,3-divinyl tetraorganosiloxane. Further details for making vinyl-substituted polydiorganosiloxanes can be found in Modic, U.S. Patent 3,425,967.

The hydride polysiloxane which can be used in the practice of the present invention has the formula,

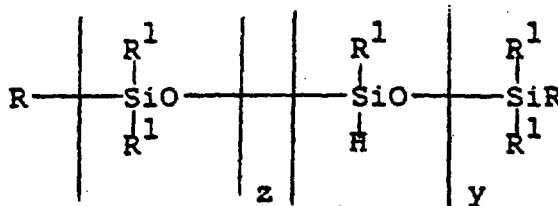

where R is selected from the group consisting of hydrogen, alkyl radicals of from 1 to 8 carbon atoms, aryl radicals of from 1 to 8 carbon atoms, and haloalkyl radicals of 3 to 8 carbon atoms, and R¹ is selected from the group consisting of alkyl radicals of from 1 to 8 carbon atoms, aryl radicals of from 1 to 8 carbon atoms, and fluoroalkyl radicals of 3 to 8 carbon atoms, where the hydride polysiloxane has a hydrogen content varying from 0.3 to 1.6% by weight, and z, and y vary such that the polymer has a viscosity varying from 5 to 1,000 centipoise at 25°C.

Preferably, the hydride polysiloxane consists essentially of chemically-combined organosiloxy units having silicon-bonded hydrogen atoms attached to silicon to form the backbone of polysiloxane chain.

In addition to the hydride polysiloxane, the silicone-foam compositions of the present invention require a source of hydroxy radicals in the form of a hydroxylated material, as previously defined. In order to provide for effective foaming results, there can be used sufficient hydroxylated material to provide from about 0.02 to about 15 gram equivalents of hydroxy radicals, per gram equivalent of silicon-bonded hydrogen atoms of the hydride polysiloxane. Preferably, there can be used from about 0.2 to about 10 gram equivalents of hydroxy radicals, while 0.5 to about 7 gram equivalents of hydroxy radicals per silicon-bonded hydrogen will provide optimum results.

Among the hydroxylated materials which are used in the practice of the present invention, there are used hydroxylated silicones such as silanols which can be in the form of homopolymers, copolymers, or mixtures thereof. It is preferred that the silanol contain at least one organic radical in a molecule per silicon atom. For example, there can be used silanol-terminated polydimethylsiloxane as well as silanol-terminated siloxane having chemically combined dimethylsiloxy units, methylphenylsiloxy units, and methyl-3,3,3-trifluoropropylsiloxy units. Also included are mixtures of hydroxylated organosiloxane polymers and hydroxylated organosilanes, such as mixtures of hydroxy end-block polydimethylsiloxane and diphenylmethylsilanol.

In addition to silanols, organic alcohols also can be used which are monohydric or polyhydric alcohols having from about 1-12 carbon atoms. Preferably, there can be used methanol, ethanol, propanol, butanol, lauryl alcohol, octyl alcohol, and ethyleneglycol. Combinations of silanols, water, and organic alcohols also have been found to be effective. Additional aspects of the use of the hydroxylated material in the reduction of silicone foams of the present invention can be found in U.S. Patents 4,189,545; 4,418,157; 4,599,367; and 3,923,705.

An effective amount of the platinum catalyst used in the foamable composition is 10 ppm to 100 ppm of platinum based on the weight of foamable composition.

One component of the platinum catalysts which can be used in the practice of the present invention is shown by Karstedt, U.S. Patent 3,775,452, and 3,715,334, which is formed by reacting chloroplatinic acid with tetramethyltetravinylcyclsiloxane in the presence of sodium bicarbonate in an ethanol solution. The resulting platinum vinylsiloxane complex can be utilized in the form of a organic solvent solution such as a toluene solution. The other component of the platinum catalyst utilized in the practice of the present invention is an organic solvent solution of $\text{Pt}(\text{P}(\text{C}_6\text{H}_5)_3)_4$ such as a methylene chloride solution.

In addition to $\text{Pt}(\text{P}(\text{C}_6\text{H}_5)_3)_4$, other phosphine complexes can be utilized as a cocatalyst with the aforementioned platinum vinylsiloxane or Karstedt catalyst. Such phosphine complexes include, for example, $\text{Cr}(\text{CO})_5\text{P}(\text{C}_6\text{H}_5)_3$, $\text{Cr}(\text{CO})_5\text{PPh}_3$, $\text{Cr}(\text{CO})_4(\text{PPh}_3)_2$, (cis and trans isomers), $\text{Cr}(\text{CO})_3(\text{PPh}_3)_3$ (fac and mer isomers), Mo and W analogues of above Cr compounds; $\text{Fe}(\text{CO})_4\text{PPh}_3$, $\text{Fe}(\text{CO})_3(\text{PPh}_3)_2$ as well as the Ru and Os analogues of the above Fe compounds; $\text{CoCl}_2(\text{PPh}_3)_3$, $\text{RhCl}(\text{PPh}_3)_3$, $\text{RhCl}(\text{CO})(\text{PPh}_3)_3$, $\text{IrCl}(\text{CO})(\text{PPh}_3)_2$, $\text{NiCl}_2(\text{PPh}_3)_2$, $\text{PdCl}_2(\text{PPh}_3)_2$, $\text{PtCl}_2(\text{PPh}_3)_2$, and $\text{ClAu}(\text{PPh}_3)$. In addition, metal complexes, such as those above containing phosphines other than triphenyl phosphine, may be effective cocatalysts. These include, but are not limited to, PMe_3 , PEt_3 , PPr_3 , $\text{P}(\text{C}-\text{C}_6\text{H}_{11})_3$, $\text{P}(\text{p}-\text{H}_4\text{Me})_3$, $\text{P}(\text{o}-\text{C}_6\text{H}_4\text{Me})_3$. In addition, complexes containing phosphites such as $\text{P}(\text{OPh})_3$, Arsines such as AsPh_3 and stibenes such as SbPh_3 may be effective cocatalysts. In the above formulae Me means methyl, Et ethyl, Pr propyl and Ph phenyl.

In addition to the vinyl-terminated polydiorganosiloxane, there also can be utilized in the foamable compositions of the present invention, per 100 parts by weight of such vinyl-terminated polydiorganosiloxane, from 1 to 50 parts by weight of a resinous copolymer shown by Modic, U.S. Patent 4,418,157, for example, consisting essentially of a resinous copolymer having a base polydiorganosiloxane, and an effective amount of a resinous copolymer selected from the group consisting of copolymers $(R^2)_3SiO_{0.5}$ (M) units, $R^2(C_2H_5)SiO$ (D) units and SiO_2 (Q) units, where R^2 is selected from the group consisting of alkyl radicals preferably having from 1 to 8 carbon atoms; aralkyl radicals, preferably having from 7 to 13 carbon atoms; alkaryl radicals, preferably having 7 to 13 carbon - atoms; aryl radicals, preferably having from 6 to 14 carbon atoms; cycloalkyl radicals, preferably having from 6 to 8 carbon atoms; vinyl radical, allyl radical and fluoroalkyl radicals, preferably 3,3,3-trifluoropropyl.

In addition to the aforementioned basic ingredients, the silicone foam composition can contain from 1 to 200 parts by weight of a filler, per hundred parts of foam composition. It is preferred to use extending fillers or reinforcing fillers, such as fumed silica and precipitated silica can be used in instances where it is desired to increase the physical properties, such as the tensile strength and tear strength of the resulting elastomeric silicone foam. Other extending fillers which may be utilized are, for example, titanium dioxide, lithopone, zinc oxide, zirconium silicate, silica airogel, iron oxide, diatomaceous earth, calcium carbonate, glass fibers, magnesium oxide, chromic oxide, zirconium oxide, aluminum oxide, α -quartz, clay, carbon, and graphite. In order to minimize the viscosity increase generally experienced when using reinforcing fillers, it can be heat treated with cyclic polysiloxanes or silazanes. A preferred filler in the practice of the present invention is ground quartz which has been found to enhance the burn-resistant properties of the composition as well as imparting some enhanced physical properties to the final cured silicone foam.

The silicone foam compositions of the present invention are generally used and stored as a two-part composition. Platinum catalyst is preferably incorporated with the vinyl-terminated polydiorganosiloxane. The hydroxylated material also can be added to the vinyl-terminated polydiorganosiloxane part along with the filler if utilized.

In forming the silicone foam, the hydride polysiloxane (part B) is rapidly mixed with the vinyl-terminated polydiorganosiloxane (part A) containing the hydroxylated material and platinum catalyst. The resulting composition can be poured into a cavity and allowed to stand. The composition, thereafter, can begin to cross-link and generate hydrogen simultaneously resulting in a cured elastomeric silicone foam at reduced density.

In order that those skilled in the art will be better able to practice the present invention, the following examples are given by way of illustration and not by way of limitation. All parts are by weight unless otherwise indicated.

35 EXAMPLE 1

A mixture of 40 grams of a blend containing 39% by weight of a polydimethylsiloxane having terminal dimethylvinylsiloxy units and a viscosity of about $75,000 \cdot 10^{-2} \text{ cm}^2/\text{s}$ (centistokes), 16% by weight of a polydimethylsiloxane having terminal dimethylvinylsiloxy units and a viscosity of about $4,000 \cdot 10^{-2} \text{ cm}^2/\text{s}$ (centistokes), 18% by weight of a methylsiloxane resin consisting essentially of chemically combined SiO_2 units and a ratio of 1.43 moles of trimethylsiloxy units, per 0.25 mole of methylvinylsiloxy units, 25% by weight of α -quartz, 2% by weight of calcium carbonate, 1.5% by weight of water, and 40 parts per million of platinum in the form of a platinum vinylsiloxane complex was blended with 0.144 grams of a methylenechloride solution of $Pt(P(C_6H_5)_3)_4$ which contained 5 weight % platinum. The mixture was blended for several minutes using a stainless steel spatula.

There was then added to the above blend, 4 grams of a mixture of 34% by weight of a vinyl-terminated polydimethylsiloxane fluid having a viscosity of about $75,000 \cdot 10^{-2} \text{ cm}^2/\text{s}$ (centistokes) and 66% by weight of a linear hydride polysiloxane having terminal trimethylsiloxy units and consisting essentially of methylhydrogensiloxy units having a viscosity of about $3100 \cdot 10^{-2} \text{ cm}^2/\text{s}$ (centistokes). The resulting mixture was then blended vigorously for 30 seconds. A foam resulted which was allowed to rise and cure. The density of the foam was then measured after about one hour. The same procedure was repeated several times except that the concentration of the platinumvinylsiloxane complex was varied between 20 parts per million to 80 parts per million. In addition, the platinum $(P(C_6H_5)_3)_4$ catalyst was varied over a range of from about 25 to 100 parts per million. In some instances, triphenylphosphine was used in place of the platinum $(P(C_6H_5)_3)_4$. In one instance, the platinum vinylsiloxane complex was introduced into the vinylpolydimethylsiloxane mixture separately as a 5 weight % platinum solution in xylene along with the platinum $(P(C_6H_5)_3)_4$ in methylene chloride. In this latter instance, there was used 0.046 grams of a 5 weight % platinum solution of platinum vinylsiloxane in xylene and 0.289 grams of the platinum triphenylphosphine catalyst in

methylenechloride at 5 weight % platinum. The following results were obtained:

Density of Silicone Foams Containing $\text{Pt}(\text{P}(\text{C}_6\text{H}_5)_3)_4$ and $\text{P}(\text{C}_6\text{H}_5)_3$ Co-Catalysts			
Pt vinylsiloxane (ppm Pt) ^c	$\text{Pt}(\text{P}(\text{C}_6\text{H}_5)_3)_4$ (ppm Pt) ^c	$\text{P}(\text{C}_6\text{H}_5)_3$ (equiv. of Pt)	Density g/cm ³ (lbs/ft ³)
40	-	-	0,251(15.7)
80	-	-	0,254(15.9)
40	25	-	0,214(13.4)
40	50	-	0,2(12.5)
40	100	-	0,211(13.2)
80	50	-	0,243(15.2)
20	50	-	0,189(11.8)
-	40	-	no cure, some H ₂
40	-	0.25	0,235(14.7)
40	-	1.0	0,216(13.5)
40	-	5.0	no cure

a) Added as a 5 wt % Pt solution in CH_2Cl_2 .

b) Added as a 5 wt % $\text{P}(\text{C}_6\text{H}_5)_3$ solution in CH_2Cl_2 .

c) Ppm reported here are based upon weight of resin in "A" component, The concentration of Pt in the final foam is 65% of this value.

The above results show that optimum reduction in foam density is achieved when a combination of the platinum vinylsiloxane catalyst and platinum triphenylphosphine catalyst is used. It is important to note that $\text{Pt}(\text{P}(\text{C}_6\text{H}_5)_3)_4$ in the absence of the Pt vinylsiloxane complex does not result in a cured material. In some instances, an effect was also achieved with triphenylphosphine in combination with the platinum vinylsiloxane catalyst.

EXAMPLE 2

The procedure of Example 1 was repeated, except that platinum vinylsiloxane catalyst was separately added in a xylene solution along with the platinum triphenylphosphine catalyst in a methylenechloride solution. Proportions of the respective platinum catalyst were chosen so that the final weight percentage of methylenechloride and xylene in the resulting foam were maintained at 0.53 and 0.053 respectively. This procedure was used to demonstrate that the reduction in density of the silicone foam was independent of a solvent effect. The following results were obtained:

Density of Silicone Foams Containing $\text{Pt}(\text{P}(\text{C}_6\text{H}_5)_3)_4$ and $\text{P}(\text{C}_6\text{H}_5)_3$ Co-Catalysts at a Fixed Xylene/ CH_2Cl_2 Concentration ^b					
Sample	Pt vinylsiloxane (ppm Pt) ^a	$\text{Pt}(\text{P}(\text{C}_6\text{H}_5)_3)_4$ (ppm Pt) ^a	$\text{P}(\text{C}_6\text{H}_5)_3$ (equiv. Pt)	Density (lb/ft ³)	Gel Time
1	40	-	-	14.9	<2 m
2	40	20	-	11.5	4 m
3	40	40	-	11.2	6 m
4	40	80	-	17.5	1-1.5 h
5	-	40	-	collapsed	>1.5 h
6	40	-	0.5	13.3	~1.5 m

a) Based upon weight of resin in "A" component.

b) samples 1-4 and 6 contain 0.53% CH_2Cl_2 and 0.053% xylene. sample 5 contains 1.07% CH_2Cl_2 and .107% xylene.

The results shown in the above table illustrate the dual nature of the platinum catalyst used in the invention. The erratic results obtained with sample 4 are likely due to insufficient stirring or agitation of the mixture.

EXAMPLE 3

The procedure of Example 2 was repeated, except that octamethylcyclotetrasiloxane (D₄) treated fumed silica (1.4% by weight) was substituted for 3.0% by weight of α -quartz and 0.2% by weight of CaCO₃. Mean cell diameter was measured with an IABS Interactive Image Analysis System. The physical properties of the foam samples shown below demonstrate that the combination of a platinum vinylsiloxane complex, a platinum triarylphosphine complex, and D₄ treated fumed silica resulted in a low density silicone foam with superior cell structure.

Density and Mean Cell Size of Silicone Foams Containing Pt(P(C ₆ H ₅) ₃) ₄ and D ₄ Treated Fumed Silica				
Pt vinylsiloxane (ppm Pt) ^a	Pt(P(C ₆ H ₅) ₃) ₄ ^a (ppm Pt) ^a	D ₄ treated fumed silica (pbw)	Density g/cm ³ (lbs/ft ³)	Mean cell size (mm)
40	0	0	0,254(15.9)	b
20	49	0	0,166(10.4)	1.42±0.86 ^c
20	49	1.4	0,182(11.4)	0.34±0.18 ^d

a) Based on weight of resin in "A" component.

b) Mean cell size not measured on high density samples.

c) 128 cells measured.

d) 972 cells measured.

Claims

1. A foamable composition comprising by weight,
 - (A) 100 parts of a vinyl-terminated polydiorganosiloxane having a vinyl substitution of from 0.0002 to 3% by weight of the vinyl terminated polydiorganosiloxane;
 - (B) 0.5 to 50 parts of a hydride polysiloxane;
 - (C) 0.2 to 10 parts of a hydroxylated material selected from organic alcohols, silanols in the form of homopolymers, copolymers and mixtures thereof, mixtures of hydroxylated organosiloxane polymers and hydroxylated organosilanes, combinations of silanols and organic alcohols or combinations of silanols, organic alcohols and water; and
 - (D) an effective amount of a platinum catalyst containing 10 ppm to 100 ppm of platinum, based on the weight of the foamable composition comprising
 - (i) platinum vinyl siloxane complex, and
 - (ii) a member selected from a platinum triarylphosphine and another triarylphosphine,
 where there is present in the platinum catalyst, per part by weight of platinum of the platinum vinyl siloxane complex, from 0.2 to 4 parts of platinum of the platinum triarylphosphine or 0.2 to 3 parts of the triarylphosphine.
2. A foamable composition in accordance with claim 1, having 0.5% to 10% by weight of fumed silica.
3. A foamable composition in accordance with claim 1, where the vinyl-terminated polydiorganosiloxane is a vinyl-terminated polydimethylsiloxane.
4. A foamable composition in accordance with claim 1, where the hydroxylated material is water.
5. A foamable composition in accordance with claim 1, where the platinum catalyst is a mixture of a platinum vinylsiloxane and platinum triarylphosphine.
6. A method for making silicone foam having a reduced foam density comprising rapidly mixing a mixture of
 - (A) 100 parts by weight of a vinyl-terminated polydiorganosiloxane, containing
 - (C) 0.2 to 10 parts by weight of a hydroxylated material, and
 - (D) an effective amount of a platinum catalyst containing 10 ppm to 100 ppm of platinum, based on the weight of the foamable composition consisting essentially of
 - (i) platinum vinyl siloxane complex, and

**EXAMPLE 3**

The procedure of Example 2 was repeated, except that octamethylcyclotetrasiloxane (D_4) treated fumed silica (1.4% by weight) was substituted for 3.0% by weight of α -quartz and 0.2% by weight of $CaCO_3$. Mean cell diameter was measured with an IABS Interactive Image Analysis System. The physical properties of the foam samples shown below demonstrate that the combination of a platinum vinylsiloxane complex, a platinum triarylphosphine complex, and D_4 treated fumed silica resulted in a low density silicone foam with superior cell structure.

Density and Mean Cell Size of Silicone Foams Containing $Pt(P(C_6H_5)_3)_4$ and D_4 Treated Fumed Silica				
Pt vinylsiloxane (ppm Pt) ^a	$Pt(P(C_6H_5)_3)_4$ ^a (ppm Pt)	D_4 treated fumed silica (pbw)	Density g/cm ³ (lbs/ft ³)	Mean cell size (mm)
40	0	0	0,254(15.9)	b
20	49	0	0,166(10.4)	1.42±0.86 ^c
20	49	1.4	0,182(11.4)	0.34±0.18 ^d

a) Based on weight of resin in "A" component.

b) Mean cell size not measured on high density samples.

c) 128 cells measured.

d) 972 cells measured.

Claims

- A foamable composition comprising by weight,
 - 100 parts of a vinyl-terminated polydiorganosiloxane having a vinyl substitution of from 0.0002 to 3% by weight of the vinyl terminated polydiorganosiloxane;
 - 0.5 to 50 parts of a hydride polysiloxane;
 - 0.2 to 10 parts of a hydroxylated material selected from organic alcohols, silanols in the form of homopolymers, copolymers and mixtures thereof, mixtures of hydroxylated organosiloxane polymers and hydroxylated organosilanes, combinations of silanols and organic alcohols or combinations of silanols, organic alcohols and water; and
 - an effective amount of a platinum catalyst containing 10 ppm to 100 ppm of platinum, based on the weight of the foamable composition comprising
 - platinum vinyl siloxane complex, and
 - a member selected from a platinum triarylphosphine and another triarylphosphine,
 where there is present in the platinum catalyst, per part by weight of platinum of the platinum vinyl siloxane complex, from 0.2 to 4 parts of platinum of the platinum triarylphosphine or 0.2 to 3 parts of the triarylphosphine.
- A foamable composition in accordance with claim 1, having 0.5% to 10% by weight of fumed silica.
- A foamable composition in accordance with claim 1, where the vinyl-terminated polydiorganosiloxane is a vinyl-terminated polydimethylsiloxane.
- A foamable composition in accordance with claim 1, where the hydroxylated material is water.
- A foamable composition in accordance with claim 1, where the platinum catalyst is a mixture of a platinum vinylsiloxane and platinum triarylphosphine.
- A method for making silicone foam having a reduced foam density comprising rapidly mixing a mixture of
 - 100 parts by weight of a vinyl-terminated polydiorganosiloxane, containing
 - 0.2 to 10 parts by weight of a hydroxylated material, and
 - an effective amount of a platinum catalyst containing 10 ppm to 100 ppm of platinum, based on the weight of the foamable composition consisting essentially of
 - platinum vinyl siloxane complex, and



(ii) a member selected from a platinum triarylphosphine and another triarylphosphine, where there is present in the platinum catalyst, per part by weight of platinum of the platinum vinyl siloxane complex, from 0.2 to 4 parts of platinum of the platinum triarylphosphine or 0.2 to 3 parts of the triarylphosphine, with

5 (B) 0.5 to 50 parts by weight of a hydride polysiloxane.

Patentansprüche

1. Schäumbare Zusammensetzung, umfassend, bezogen auf das Gewicht,
 - 10 (A) 100 Teile eines Vinylendgruppen aufweisenden Polydiorganosiloxans mit einer Vinylsubstitution von 0,0002 bis 3 Gew.-% des Vinylendgruppen aufweisenden Polydiorganosiloxans,
 - (B) 0,5 bis 50 Teile eines Hydridpolysiloxans,
 - (C) 0,2 bis 10 Teile eines hydroxylgruppenhaltigen Materials, ausgewählt aus organischen Alkoholen, Silanolen in Form von Homopolymeren, Copolymeren und deren Mischungen, Mischungen von
 - 15 hydroxylgruppenhaltigen Organosiloxanpolymeren und hydroxylgruppenhaltigen Organosilanen, Kombinationen von Silanolen und organischen Alkoholen oder Kombinationen von Silanolen, organischen Alkoholen und Wasser und
 - (D) eine wirksame Menge eines Platinkatalysators, der 10 ppm bis 100 ppm Platin, bezogen auf das Gewicht der schäumbaren Zusammensetzung, enthält, umfassend
 - 20 (i) Platin-Vinylsiloxan-Komplex und
 - (ii) eine Verbindung, ausgewählt aus einem Platintriarylphosphin und anderem Triarylphosphin, wobei in dem Platinkatalysator, pro Gewichtsteil Platin des Platin-Vinylsiloxan-Komplexes, von 0,2 bis 4 Teile Platin des Platintriarylphosphins oder 0,2 bis 3 Teile des Triarylphosphins vorhanden sind.
- 25 2. Schäumbare Zusammensetzung gemäß Anspruch 1, die 0,5 bis 10 Gew.-% pyrogenes Siliciumdioxid aufweist.
3. Schäumbare Zusammensetzung gemäß Anspruch 1, worin das Vinylendgruppen aufweisende Polydiorganosiloxan ein Vinylendgruppen aufweisendes Polydimethylsiloxan ist.
- 30 4. Schäumbare Zusammensetzung gemäß Anspruch 1, worin das hydroxylgruppenhaltige Material Wasser ist.
5. Schäumbare Zusammensetzung gemäß Anspruch 1, worin der Platinkatalysator eine Mischung aus
- 35 einem Platinvinylsiloxan und Platintriarylphosphin ist.
6. Verfahren zum Herstellen von Siliconschaum mit einer verringerten Schaumdichte, umfassend das rasche Vermischen einer Mischung von
 - (A) 100 Gewichtsteilen eines Vinylendgruppen aufweisenden Polydiorganosiloxans, enthaltend
 - 40 (C) 0,2 bis 10 Gewichtsteile eines hydroxylgruppenhaltigen Materials und
 - (D) eine wirksame Menge eines Platinkatalysators, enthaltend 10 ppm bis 100 ppm Platin, bezogen auf das Gewicht der schäumbaren Zusammensetzung, bestehend im wesentlichen aus
 - (i) Platin-Vinylsiloxan-Komplex und
 - (ii) einer Verbindung, ausgewählt aus einem Platintriarylphosphin und anderem Triarylphosphin
 - 45 wobei in dem Platinkatalysator, pro Gewichtsteil Platin des Platin-Vinylsiloxan-Komplexes, von 0,2 bis 4 Teile Platin des Platintriarylphosphins oder 0,2 bis 3 Teile des Triarylphosphins vorhanden sind, mit 0,5 bis 50 Gewichtsteilen eines Hydridpolysiloxans.

Revendications

- 50 1. Composition expansible contenant, en poids,
 - A) 100 parties d'un polydiorganosiloxane à groupes terminaux vinylo, dont le taux de substitution par des groupes vinylo vaut de 0,0002 à 3 % en poids, par rapport au polydiorganosiloxane à groupes terminaux vinylo,
 - 55 B) de 0,5 à 50 parties d'un hydrogénopolysiloxane,
 - C) de 0,2 à 10 parties d'une matière hydroxylée choisie parmi les alcools organiques, les silanols sous forme d'homopolymères, de copolymères ou de mélanges de ces types, les mélanges de polymères organosiloxanes hydroxylés et d'organosilanes hydroxylés, les combinaisons de silanols



et d'alcools organiques, ou les combinaisons de silanols, d'alcools organiques et d'eau, et

D) une quantité efficace d'un catalyseur au platine, contenant de 10 ppm à 100 ppm de platine par rapport au poids de la composition expansible et comprenant

a) un complexe platine-vinylsiloxane et

5 b) un composant choisi parmi un complexe platine-triarylphosphine et un autre complexe de triarylphosphine,

et dans lequel catalyseur au platine il y a, pour 1 partie en poids de platine du complexe platine-vinylsiloxane, de 0,2 à 4 parties de platine du complexe platine-triarylphosphine ou de 0,2 à 3 parties d'un autre complexe de triarylphosphine.

10

2. Composition expansible conforme à la revendication 1, contenant de 0,5 à 10 % en poids de silice fumée.

15

3. Composition expansible conforme à la revendication 1, dans laquelle le polydiorganosiloxane à groupes terminaux vinyle est un polydiméthylsiloxane à groupes terminaux vinyle.

4. Composition expansible conforme à la revendication 1, dans laquelle la matière hydroxylée est de l'eau.

20

5. Composition expansible conforme à la revendication 1, dans laquelle le catalyseur est un mélange de platine-vinylsiloxane et de platine-triarylphosphine.

6. Procédé de fabrication d'une mousse de silicone présentant une densité de mousse réduite, comprenant le fait de mélanger rapidement un mélange contenant

25

A) 100 parties en poids d'un polydiorganosiloxane à groupes terminaux vinyle,

C) de 0,2 à 10 parties en poids d'une matière hydroxylée, et

D) une quantité efficace d'un catalyseur au platine, contenant de 10 ppm à 100 ppm de platine par rapport au poids de la composition expansible et comprenant essentiellement

a) un complexe platine-vinylsiloxane et

30

b) un composant choisi parmi un complexe platine-triarylphosphine et un autre complexe de triarylphosphine,

et dans lequel catalyseur au platine il y a, pour 1 partie en poids de platine du complexe platine-vinylsiloxane, de 0,2 à 4 parties de platine du complexe platine-triarylphosphine ou de 0,2 à 3 parties d'un autre complexe de triarylphosphine,

35

avec

B) de 0,5 à 50 parties en poids d'un hydrogénopolysiloxane.

40

45

50

55