

- 1 -

DescriptionSanitary tap for automatic water deliveryTechnical field

This invention relates to a sanitary tap for automatic water delivery.

5 Background art

To deliver/mix the hot and/or cold water, known taps generally require the operation of suitable control members, generally by contact with the user's hand (or foot).

10 Taps are also known which deliver water when the user positions his hands close to the tap, to activate a proximity sensor which determines water delivery. However such taps deliver water at only a single predetermined temperature, it not being possible to adjust the temperature other than by manually adjusting the control members (in the normal manner).

15 The object of the present invention is to provide a sanitary tap able to deliver water at the desired temperature without contact being required between the hands (or another part of the body) of the user and a part of the tap.

20 The purpose of this is to make the use of the tap more comfortable, more rapid and more hygienic.

A typical application of the tap of the invention is in washrooms open to the public (restaurants, public toilets, offices, communities, public transport, etc.) where the requirements of hygiene are particularly felt.

25

Disclosure of the invention

According to the invention, the tap comprises:

- a sensor means for determining the distance between the tap and the user's hands;
- 30 - means for regulating the temperature of the water fed to the delivery port of the tap; and
- means for processing the distance values provided by the

- 2 -

sensor means and for consequently controlling the water temperature regulating means such that the temperature of the water delivered by the port 11 differs on the basis of the differing distance of the user's hands 3 from the tap.

5 When in use, the user positions his hands below the tap, which then delivers water at a temperature which differs in accordance with the distance between the hands and the tap. For example, the temperature can be higher the greater this distance, or vice versa.

10 The user can then control the water delivery and determine its temperature simply by placing his hands at the required distance under the tap delivery port without touching any part of it. The invention is described in detail hereinafter with the aid of the accompanying figures, which illustrate one embodiment thereof.

15 Figure 1 is a schematic view of the tap according to the invention.

Figure 2 is a schematic representation of one embodiment of the temperature regulating means 40.

The tap of the invention, shown very schematically in Figure 1, is indicated overall by 1 and comprises a usual water deliver port 11, and is typically positioned above a wash basin 2 in which the delivered water is collected.

20

With the tap 1 there is associated a sensor means 20 arranged to determine the distance of the user's hands 3 from the tap.

25 The sensor means 20 is positioned close to the delivery port 1 (as shown in Figure 1), and faces the underlying wash basin 2.

The sensor means 20 can be of infrared reflecting type, or can incorporate laser diodes or ultrasound means.

The tap also comprises means 30 for processing the distance values provided by the sensor means 20.

30

Specifically, the means 30 comprise a microcontroller 31 which processes the information received from the sensor means 20 to implement the desired function.

The means 30 act on the temperature regulating means 40 for the water fed to the delivery port 11.

35

The microcontroller 31 contains software for controlling the means

- 3 -

40 such that the delivered temperature depends on the distance of the hands 3 from the sensor 20.

For example, the microcontroller 31 operates by dividing the space below the port 11 into several sectors and associating with each sector a respective delivered water temperature.

5 For example, on positioning the hands 3 within the sector nearest to the port 11, this delivers water at "cold" temperature; on positioning the hands 3 within the sector farthest from the port 11, this delivers water at "hot" temperature; finally on
10 positioning the hands 3 within one of the intermediate sectors, the port 11 delivers water at "tepid" temperature, hot to a greater or lesser extent.

The software of the microcontroller 31 can be such as to cause the delivered water temperature to vary instantaneously as the
15 distance of the hands 3 from the port 11 varies.

Alternatively the temperature determined by the presence of the hand 3 in any one of the sectors can be made to remain constant for a predetermined time period, even if the hands are moved into another sector. In the embodiment shown in Figure 2, the means
20 40 comprise a plurality of on-off solenoid valves each connected to a source 42 feeding cold water to the tap, or to a source 43 feeding hot water to the tap.

The outlets of the valves 41 are all connected to a single exit pipe 44 in which the water is mixed and fed to the port 11.

25 By means of an interconnection device 32 between the microcontroller 31 and the valves 41, the opening and closure of these latter is controlled by the software of the microcontroller 31 in accordance with different combinations, with each of which there corresponds a respective mixture of hot and cold water
30 having a respective temperature, all said temperatures being different.

In the embodiment shown in Figure 2 four valves 41 are provided, with them there being associated constricting means 45 for regulating the flow rate.

35 Those valves 41 indicated by V1 and V2 are connected to the cold water source 42, whereas those valves 41 indicated by V3 and V4

- 4 -

are connected to the hot water source 43.

The constricting means 45 are adjusted such that the flow rate through the valves V2 and V4 is one half of that through the valves V1 and V3.

5 Hence by operating the valves V1-V4, five different combinations are obtained with five corresponding temperatures, namely a cold temperature, a hot temperature and three intermediate temperatures, plus a configuration in which the tap delivers no water, as shown in the following table:

10	V1	V2	V3	V4	
	on	on	off	off	--> cold temperature, flow = 3/4 max
	on	on	off	on	--> nearly cold temperature, flow = max
	on	off	on	off	--> medium temperature, flow = max
	off	on	on	on	--> nearly hot temperature, flow = max
15	off	off	on	on	--> hot temperature, flow = 3/4 max
	off	off	off	off	--> tap closed

In a different embodiment (not shown) of the means 40, these use proportional valves for mixing the hot and cold water together.

20 Further accessory means can be associated with the tap of the invention to facilitate its use.

One of these accessories is a water temperature indicator, in particular a light-emitting indicator of the delivered water temperature, positioned typically on the top of the delivery port 11 to provide signals of different colour according to the water temperature so that the user can be aware of the delivered water temperature not only by direct contact with the hands but also by sight.

25 A temperature sensor (not shown in the figures) for the delivered water can also be positioned such as to be grazed thereby and be arranged to close the hot water source 43 if the delivered water temperature exceeds a preset maximum value.

30 The regulating means 40 can be of a type different from those illustrated. They can for example comprise electrical resistance elements immersed in the water stream to the port 11, to be activated by the means 30 such as to heat the delivered water to different temperatures.

- 5 -

Numerous modifications of a practical and applicational nature can be made to the invention, without leaving the scope of the inventive idea as hereinafter claimed.

THIS SHEET HAS BEEN
REPLACED

- 6 -

This Sheet Has Been Replaced




Claims

1. A sanitary tap for automatic water delivery ,
characterised by comprising:
- a sensor means (20) for determining the distance between the
tap and the user's hands (3);
 - 5 - means (40) for regulating the temperature of the water fed to
the delivery port (11) of the tap; and
 - means (30) for processing the distance values provided by the
sensor means (20) and for consequently controlling the water
temperature regulating means (40) such that the temperature of the
10 water delivered by the port (11) differs on the basis of the
differing distance of the user's hands (3) from the tap.
2. A tap as claimed in claim 1, characterised in that said
means (30) for processing the distance values operate by dividing
15 the space below the tap into several sectors and associating with
each sector a determined delivered water temperature.
3. A tap as claimed in claim 1, characterised in that said
sensor means (20) is positioned close to the water delivery port
20 (11).
4. A tap as claimed in claim 1, characterised in that said
water temperature regulating means (40) comprise a plurality of
on-off valves (41), each connected to a cold water source (42) or
25 to a hot water source (43) and having their outlets all connected
to the delivery port (11) of the tap, said valves (41) being
opened and closed by said processing means (30) in different
combinations, each of which corresponds to a respective hot/cold
water mixture having a respective temperature.



* C L N S *

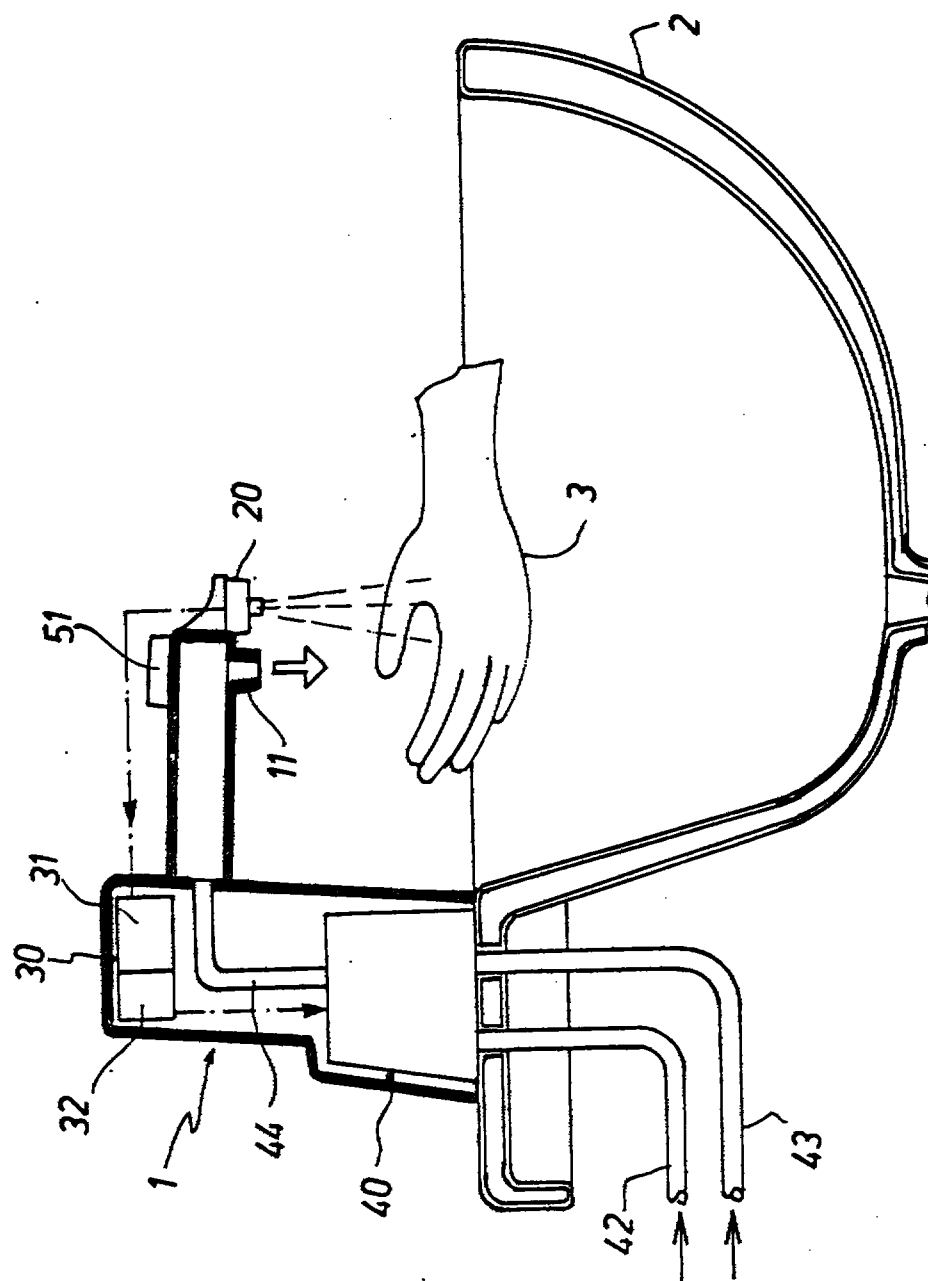FIG. 1

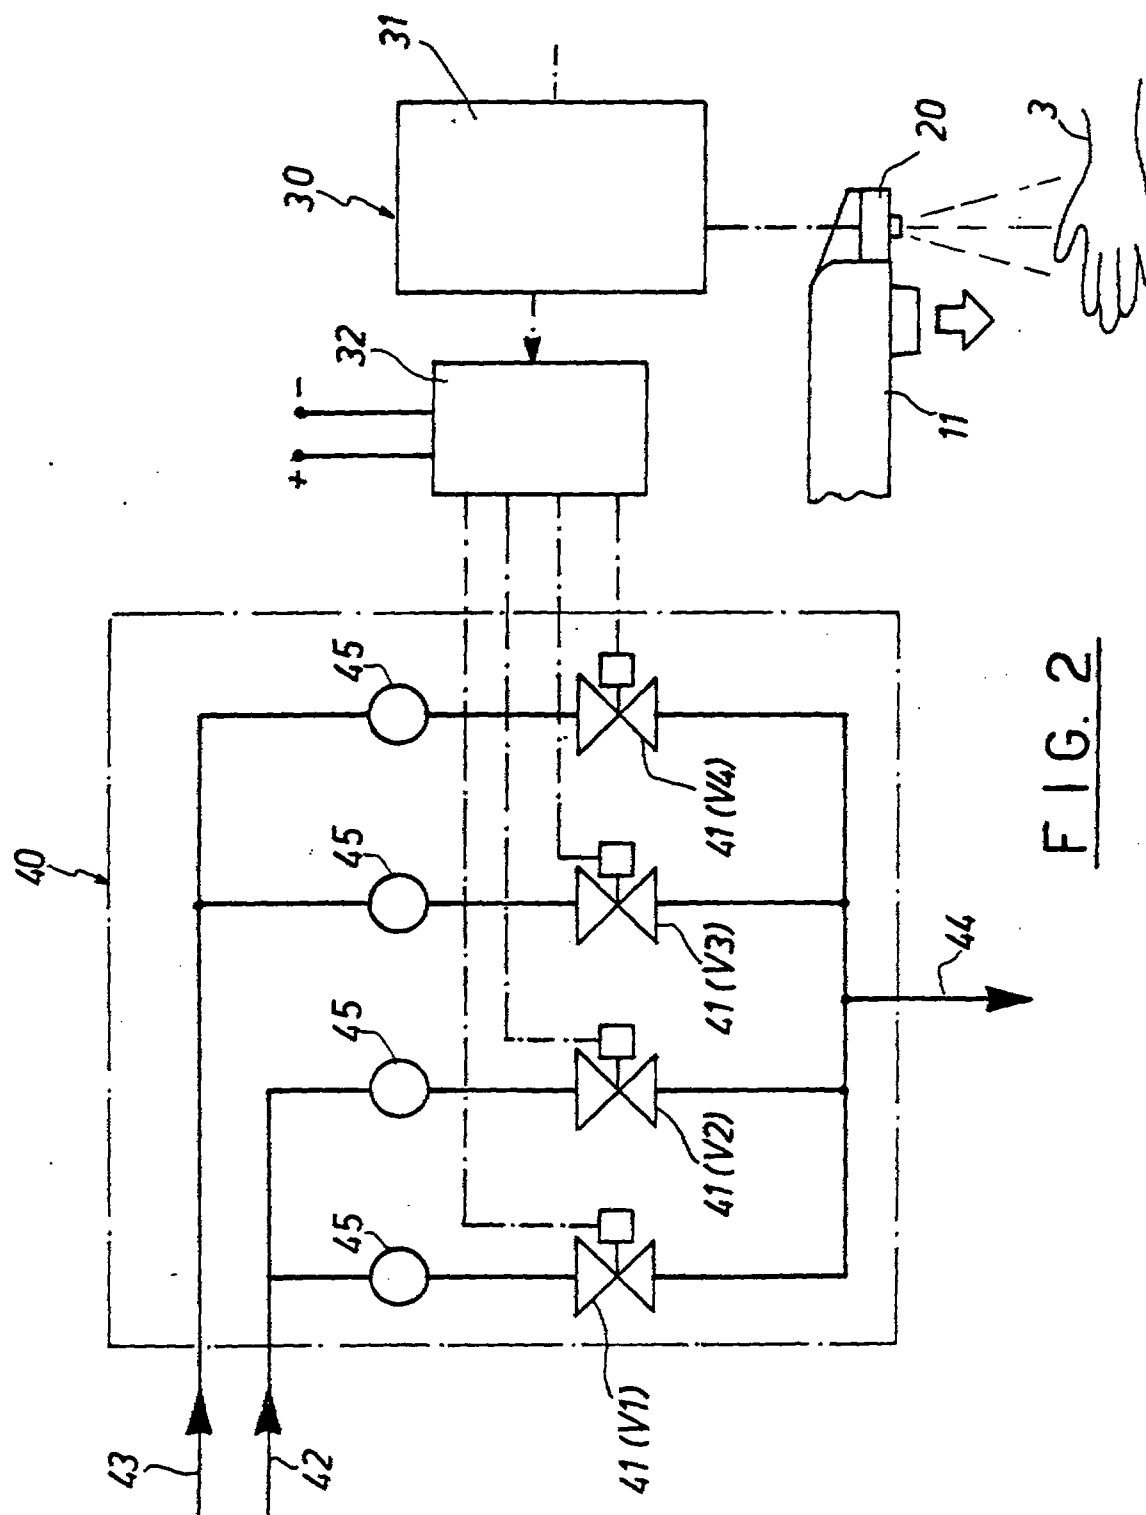


FIG. 2

REPLACEMENT SHEETS		SG
☐	Description : paged	to paged
☒	Claim(s) : paged 6...	to paged 8.
☐	Drawing(s) : paged	to paged
☐	Abstract : paged	to paged
DATE OF RECEIPT		27/12/99

Claims

1. A sanitary tap for automatic water delivery to a body part of a user comprising :

a spout provided with a delivery port;

sensor means disposed on said spout proximate said delivery port for determining a distance value corresponding to the distance between said delivery port and the body part of the user;

water temperature regulating means for regulating the temperature of the water fed through said spout to said delivery port; and

processing means for processing said distance value provided by said sensor means and for controlling said water temperature regulating means in response to said distance value.

2. The sanitary tap according to claim 1 wherein said processing means divides the space below said delivery port into a plurality of sectors and associates each of said sectors with a desired delivered water temperature.

3. The sanitary tap according to claim 1 wherein said sensor means is disposed substantially adjacent said delivery port.

This is the replacement sheet

Date: 27 DEC 1999



9611042-4
27/12/99

4. The sanitary tap according to claim 1 wherein said tap further comprises a cold water inlet and a hot water inlet;

wherein said water temperature regulating means comprises a plurality of on-off valves connected between said hot and cold water inlets and said delivery port; and

wherein said processing means opens and closes said valves in different combinations, each of which corresponds to a respective hot/cold water mixture for achieving a desired delivered water temperature.

5. The sanitary tap according to claim 4 wherein said plurality of on-off valves comprise :

a first cold water valve attached to said cold water inlet;

a second cold water valve attached to said cold water inlet;

a first hot water valve attached to said hot water inlet; and

a second hot water valve attached to said hot water inlet.

6. The sanitary tap according to claim 4 wherein said water temperature regulating means further comprises flow restriction means disposed between said hot and cold water inlets and said plurality of on-off valves for regulating the flow of water through said valves.

This is the replacement sheet

Date: 27 DEC 1999



7. The sanitary tap according to claim 1 wherein said processing means is capable of directing said water temperature regulating means to turn the flow of water through said spout on and off.

8. The sanitary tap according to claim 1 wherein said sensor means detects the distance between said delivery port and the body part of the user in a direction which is substantially the same direction in which said delivery port faces.

9. The sanitary tap according to claim 1 further comprising a heater for increasing the temperature of the water which passes through said spout.




This is the replacement sheet

Date: 27 DEC 1999

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : E03C 1/05	A1	(11) International Publication Number: WO 96/14477 (43) International Publication Date: 17 May 1996 (17.05.96)
(21) International Application Number: PCT/IB95/00942 (22) International Filing Date: 31 October 1995 (31.10.95) (30) Priority Data: RE94A000095 8 November 1994 (08.11.94) IT (71) Applicant (for all designated States except US): AMERICAN STANDARD INC. [US/US]; One Centennial Avenue, Piscataway, NJ 08855-6820 (US). (72) Inventor; and (75) Inventor/Applicant (for US only): FAIT, Claudio [IT/IT]; Via Giovanni da Procida, 5, I-20149 Milano (IT). (74) Agents: CORRADINI, Corrado et al.; Via Dante Alighieri, 4, I-42100 Reggio Emilia (IT).	(81) Designated States: AL, AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, LS, MW, SD, SZ, UG). Published With international search report. SG 9611042-4	

(54) Title: SANITARY TAP FOR AUTOMATIC WATER DELIVERY

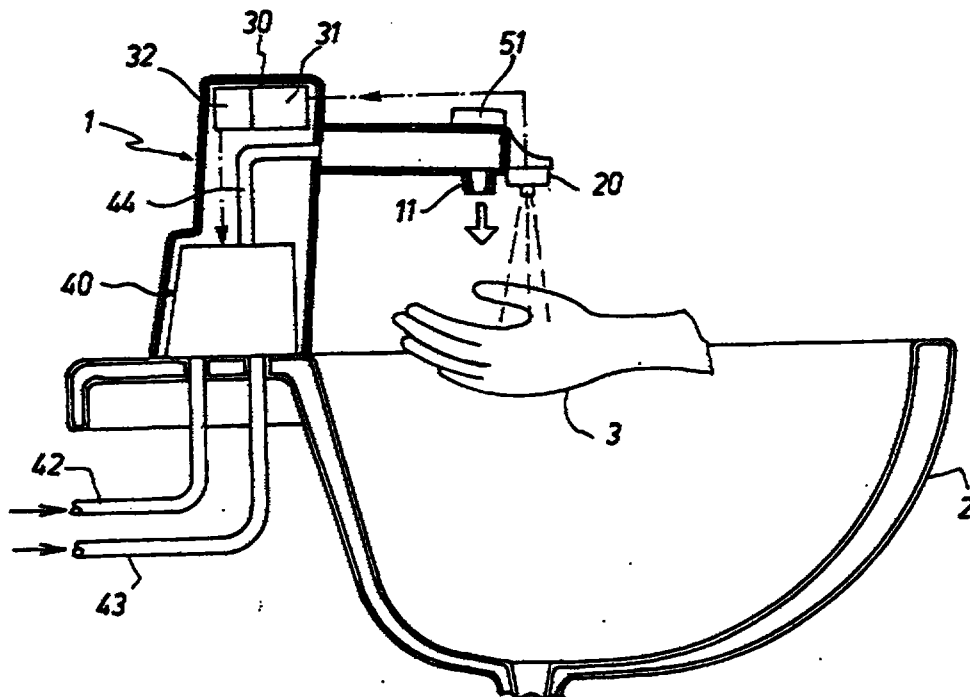

(57) Abstract

The tap comprises: a sensor means (20) for determining the distance between the tap and the user's hands (3); means (40) for regulating the temperature of the water fed to the delivery port (11) of the tap; and means (30) for processing the distance values provided by the sensor means (20) and for consequently controlling the water temperature regulating means (40) such that the temperature of the water delivered by the port (11) differs on the basis of the differing distance of the user's hands (3) from the tap.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

90116-4