PCT WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : G11B 7/09, 20/12

A2

(11) International Publication Number: **WO 99/13463**

(43) International Publication Date: 18 March 1999 (18.03.99)

(21) International Application Number: PCT/IB98/01359

(22) International Filing Date: 31 August 1998 (31.08.98)

(30) Priority Data:
97202767.6 9 September 1997 (09.09.97) EP

(71) Applicant *(for all designated States except US)*: KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL–5621 BA Eindhoven (NL).

(71) Applicant *(for SE only)*: PHILIPS AB [SE/SE]; Kottygatan 7, Kista, NL–16485 Stockholm (SE).

(72) Inventor; and


(75) Inventor/Applicant *(for US only)*: VAN DEN ENDEN, Gijsbert, Joseph [NL/NL]; Prof. Holstlaan 6, NL–5656 AA Eindhoven (NL).

(74) Agent: VISSER, Derk; Internationaal Octrooibureau B.V., P.O. Box 220, NL–5600 AE Eindhoven (NL).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GB, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published
Without international search report and to be republished upon receipt of that report.

(54) Title: OPTICAL RECORD CARRIER AND APPARATUS FOR SCANNING SUCH A RECORD CARRIER

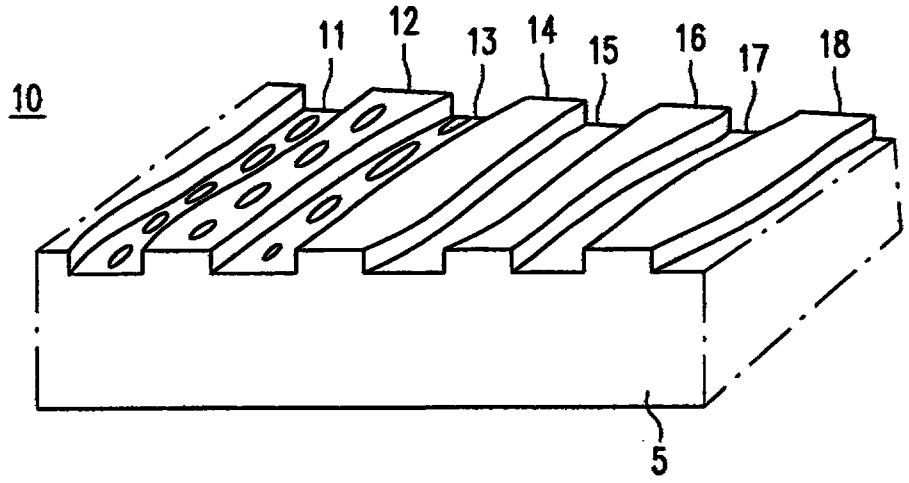

(57) Abstract

An optical record carrier (10) comprises a recording layer for recording information in a pattern of optically detectable marks in substantially parallel tracks. The tracks comprise alternating first and second servo tracks (11, 13). The servo tracks have a track modulation different from the information pattern and indicative of position information. The track modulations of the first and second servo tracks comprise different position information and have a fixed phase relation.