

ROTARY DRILL BIT WITH IMPROVED CUTTER**TECHNICAL FIELD OF THE INVENTION**

5 This invention relates in general to rotary cone drill bits used in drilling a borehole in the earth and in particular to composite cone cutters with enhanced downhole performance.

BACKGROUND OF THE INVENTION

One type of drill used in forming a borehole in the earth is a roller cone bit. A typical roller cone bit comprises a body with an upper end adapted for connection to a drill string. Depending from the lower end portion of the body are a plurality of arms, typically three, each with a spindle protruding radially inward and downward with respect to a projected rotational axis of the body. A cone cutter is mounted on each spindle and supported rotatably on bearings acting between the spindle and the inside of a spindle-receiving cavity in the cutter. On the underside of the body and radially inward of the arms are one or more nozzles. These nozzles are positioned to direct drilling fluid passing downwardly from the drill string toward the bottom of the borehole being formed. The drilling fluid washes away the material removed from the bottom of the borehole and cleanses the cutters, carrying the cuttings radially outward and then upward within the annulus defined between the bit body and the wall of the borehole.

Protection of the bearings which allow rotation of the respective roller cone cutters can lengthen the useful service life of the bit. Once drilling debris is allowed to infiltrate between the bearing surfaces of the cone and spindle, failure of the bearing and the drill bit will follow shortly. Various mechanisms have been employed to help keep debris from entering between the bearing surfaces. A typical approach is to utilize an elastomeric seal across the gap between the bearing surfaces of the rotating cone cutter and its support on the bit. However, once the seal fails, it again is not long before drilling debris contaminates the bearing surfaces via the gap between the rotating cutter and the spindle. Thus, it is important that the seal be fully protected against wear caused by debris in the borehole.

At least two prior art approaches have been employed to protect the seal from debris in the well. One approach is to provide hardfacing and wear buttons on opposite sides of the gap between the spindle support arm and cutter, respectively, where the gap opens to the outside of the bit and is exposed to debris-carrying well fluid. These buttons slow the erosion of the metal adjacent the gap, and thus prolong the time before the seal is exposed to borehole debris. Another approach is to construct the inner-fitting parts of the cutter and the spindle support arm so as to produce in the gap a tortuous path to the seal that is difficult for debris to follow. An example of this latter arrangement is disclosed in U.S. Patent No. 4,037,673.

An example of the first approach is used in a conventional tri-cone drill bit wherein the base of each cone cutter at the juncture of the respective spindle and support arm is defined at least in part by a substantially frustoconical surface, termed the cone backface. This cone backface is slanted in the opposite direction as the conical surface of the shell or tip of the cutter and includes a plurality of hard metal buttons or surface compacts. The latter are designed to reduce the wear of the frustoconical portion of the backface on the cone side of the gap. On the other side of the gap, the tip of the arm is protected by a hardfacing material. For definitional purposes, that portion of the arm which is on the outside of the bit and below the nozzle is referred to as a shirttail surface or simply shirttail. More specifically, in referring to prior art bits, radially outward of the juncture of the spindle with the arm, and toward the outer side of the bit, the lower pointed portion of the shirttail is referred to as the tip of the shirttail or shirttail tip.

During drilling with rotary bits of the foregoing character, debris often collects between the backface of

the cone cutters and the wall of the borehole generally within the area where the respective gaps associated with each cone cutter open to the borehole annulus. As a result, the underside of the edge of the shirrtail tips which lead in the direction of rotation of the bit during drilling, i.e., the leading edge, can become eroded. As this erosion progresses, the hardfacing covering the shirrtail tips eventually chips off. This chipping exposes underlying softer metal to erosion and thereby shortens the path that debris may take through the gap to the seal. This path shortening ultimately exposes the seal to borehole debris and thereby causes seal failure.

SUMMARY OF THE INVENTION

The present invention contemplates an improved rotary cone drill bit by novel construction of the interfitting relationship between the associated cone cutters and their respective support arms to better protect against erosion at the clearance gap between each cone cutter and its respective arm and, thereby, better protect seals disposed in the gap associated with each cone cutter. The present invention also includes a composite cone cutter with improved wearing surfaces and enhanced service life.

In one aspect of the invention, a support arm and cone cutter assembly of a rotary rock bit having a body provides superior erosion protection. The assembly includes an arm integrally formed with the body and having an inner surface, a shirrtail surface, and a bottom edge. The inner surface and the shirrtail surface are contiguous at the bottom edge. A spindle is attached to the inner surface and is angled downwardly with respect to the arm. A portion of the spindle defines an inner sealing surface. The assembly also includes a cutter that defines a cavity with an opening for receiving the spindle. A portion of the cavity defines an outer sealing surface that is concentric with the inner sealing surface. The assembly further includes a seal for forming a fluid barrier between the inner and outer sealing surfaces. A gap associated with each support arm and cone cutter assembly includes a portion formed between the respective cavity and spindle, and has an opening contiguous with the bottom edge of the respective support arm.

In another aspect of the invention, a composite cone cutter is provided with the backface of the cone having a hard metal covering such as hardfacing. Alternatively, a portion of the composite cone including the backface may itself be made of hard metal so that the base of the

composite cone adjacent the gap is highly resistant to both erosion and wear. In accomplishing this, an important and preferred aspect of the invention is the formation of a composite cone cutter for a rotary cone drill bit which is comprised of dissimilar materials normally incompatible with each other under the usual processing steps required for the manufacture of a rotary cone drill bit. Specifically, the cone backface may be formed of a hard metal material that is more resistant to erosion and wear than conventional hardfacing materials and also incompatible with the usual heat-treating processes to which the main portion or shell of the cone body is subjected.

The invention also resides in the novel construction of the body of the cone cutter with the separate formation of a base portion comprised of a nonheat-treatable material and a conical tip or shell comprised of a conventional heat-treated steel. Subsequently, the base and tip are joined securely together in a manner which is non-destructive to the heat-treated characteristics of the tip and the high hardness characteristics of the base. The present invention results in a composite cone cutter having metallurgical characteristics which optimize downhole performance while at the same time allowing for reliable, efficient manufacturing of the composite cone cutter.

An important technical advantage of the present invention includes the ability to fabricate or manufacture a backface ring separately from the shell or tip of the cone cutter body. Thus, various types of wear buttons, inserts, and/or compacts may be fabricated as an integral part of the backface ring during the associated molding or casting process. Also, fabrication of the backface ring as a separate component allows molding a layer of diamonds and/or diamond particles as an integral part of the backface ring. The present invention allows

designing and fabrication of a backface ring which will optimize the downhole performance of the associated cone cutter without affecting the performance of the shell or tip of the cone cutter body.

- 5 The foregoing and other advantages of the present invention will become more apparent from the following description of the preferred embodiments for carrying out the invention when taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding of the present invention, and the advantages thereof, reference is now made to the following descriptions taken in conjunction with the accompanying drawings, in which:

FIGURE 1 is an isometric view of a rotary cone drill bit embodying the novel features of the present invention;

FIGURE 2 is an enlarged drawing partially in section and partially in elevation with portions broken away showing one of the rotary cone cutters mounted on a support arm of the drill bit illustrated in FIGURE 1;

FIGURE 2A is an enlarged drawing of the rotary cone cutter illustrated in FIGURE 2;

FIGURE 3 is a drawing partially in section and partially in elevation with portions broken away showing a rotary cone cutter incorporating an alternative embodiment of the present invention in drilling engagement with the bottom of a borehole;

FIGURE 4A is an enlarged isometric drawing of a backface ring incorporating one embodiment of the present invention satisfactory for use with the rotary cone cutters of FIGURES 1 and 2;

FIGURE 4B is an enlarged isometric drawing of a backface ring incorporating another embodiment of the present invention satisfactory for use with the rotary cone cutters of FIGURES 1 and 2;

FIGURE 4C is an enlarged isometric drawing of a backface ring incorporating another embodiment of the present invention satisfactory for use with the rotary cone cutters of FIGURES 1 and 2; and

FIGURE 4D is an enlarged isometric drawing of a backface ring incorporating an alternative embodiment of the present invention satisfactory for use with the rotary cone cutters of FIGURES 1 and 2.

DETAILED DESCRIPTION OF THE INVENTION

The preferred embodiments of the present invention and its advantages are best understood by referring to FIGURES 1-4D of the drawings, like numerals being used for like and corresponding parts of the various drawings.

As shown in the drawings for purposes of illustration, the present invention is embodied in a rotary cone drill bit 10 of the type utilized in drilling a borehole in the earth. Rotary cone drill bit 10 may sometimes be referred to as a "rotary rock bit." With rotary cone drill bit 10, cutting action occurs as cone-shaped cutters 11 are rolled around the bottom of the borehole by rotation of a drill string (not shown) attached to bit 10. Cutters 11 may sometimes be referred to as "rotary cone cutters" or "roller cone cutters."

As shown in FIGURE 1, cutters 11 each include cutting edges formed by grooves 12 and protruding inserts 13 which scrape and gouge against the sides and bottom of the borehole under the weight applied through the drill string. The formation of material debris thus created is carried away from the bottom of the borehole by drilling fluid ejected from nozzles 14 on underside 15 of bit 10. The debris-carrying fluid generally flows radially outward between underside 15 or exterior of bit 10 and the borehole bottom, and then flows upwardly toward the well head (not shown) through an annulus 16 (FIGURE 3) defined between bit 10 and side wall 17 of the borehole.

As shown in FIGURE 1, rotary cone drill bit 10 comprises an enlarged body 19 with a tapered, externally-threaded upper section 20 adapted to be secured to the lower end of the drill string. Depending from the body are three support arms 21 (two visible in FIGURE 1), each with a spindle 23 (FIGURES 2 and 3) connected to and extending from an inside surface 24 thereof and a shirttail outer surface 25. Spindles 23 are preferably angled downwardly and inwardly with respect to bit body

19 so that as bit 10 is rotated, the exterior of cutters
11 engage the bottom of the borehole. For some
applications, spindles 23 may also be tilted at an angle
of zero to three or four degrees in the direction of
5 rotation of drill bit 10.

Within the scope of the present invention, each of
three cutters 11 is constructed and mounted on its
associated spindle 23 in a substantially identical manner
(except for the pattern of the rows of inserts 13).

10 Accordingly, only one of arm 21/cutter 11 assemblies is
described in detail, it being appreciated that such
description applies also to the other two arm-cutter
assemblies.

FIGURES 2 and 3 show alternative embodiments of the
15 present invention represented by roller cone cutters 11
and 11" which may be satisfactorily use with a rotary
drill bit such as shown in FIGURE 1. Drill bit 10 of
FIGURES 1 and 2 is essentially equivalent in structure
and operation to drill bit 10" of FIGURE 3, except for
20 modifications to shirrtail surface 25" and cone cutter
11". The dimensions of base portion or backface ring 30"
have also been modified to accommodate shorter shirrtail
surface 25" shown in FIGURE 3. These modifications will
be described later in more detail.

25 As shown in FIGURE 2, inserts 13 are mounted within
sockets 27 formed in a conically-shaped shell or tip 29
of cutter 11. Various types of inserts and compacts may
be used with tip 29 depending upon the intended
application for the resulting drill bit. For example,
30 oval shaped compacts (not shown) may be used to provide
longer service life with less wear. Also, tip 29 could
be formed with one or more rows of teeth (not shown).

Base portion 30 of cutter 11 includes grooves 12 and
is frustoconical in shape, but angled in a direction
35 opposite the angle of tip 29 on the outer surface
thereof. Base 30 also includes a frustoconically-shaped

outer portion 33 with backface 31 formed on the outer surface thereof and an end portion 34 extending radially relative to central axis 35 of spindle 23. Base 30 and tip 29 cooperate to form composite cone cutter 11. Base portion 30 may also be referred to as a "backface ring".

Opening inwardly of end portion 34 is a generally cylindrical cavity 36 for receiving spindle 23. A suitable bearing 37 is mounted on spindle 23 and engages between a bearing wall 39 of cavity 36 and an annular bearing surface 38 on spindle 23. A conventional ball retaining system 40 secures cutter 11 to spindle 23.

FIGURE 2 is an enlarged view in section and elevation of support arm 21 and its associated spindle 23 with composite cutter cone 11 mounted thereon. A gap 41 is formed between the interior of cylindrical cavity 36 and adjacent inside surface 24 of supporting arm 21 and/or the exterior portions of spindle 23. The tip of shirrtail surface 25 cooperates with end portion 34 of base portion 30 to partially define first section 52 of gap 41. Second section 54 of gap 41 is defined by the interior of cavity 36 and the exterior of spindle 23. First section 52 of gap 41 lies in a plane that is generally perpendicular to spindle axis 35. Second section 54 of gap 41 extends approximately parallel with spindle axis 35. Thus, gap 41 includes first section 52 which is substantially perpendicular to second section 54.

An elastomeric seal 43 is disposed within gap 41 between spindle 23 and the interior of cavity 36 to block the infiltration of well fluids and debris through gap 41. Seal 43 is located adjacent the juncture of spindle 23 with support arm 21. Seal 43 both retains lubricants within bearing 37 and protects against the infiltration of debris through gap 41 to the space between the relatively-rotating bearing surfaces 38 and 39 of spindle 23 and cutter 11. Seal 43 protects the associated

bearing 37 from loss of lubricants and such debris, and thus prolongs the life of drill bit 10.

Gap 41 includes an opening located adjacent outside surface or shirrtail 25 and contiguous with the bottom edge of arm 21, and is thus open to fluid communication with borehole annulus 16. It is important that the width of gap 41 be kept relatively small and the length of gap 41 between its opening to annulus 16 and seal 43 be kept relatively long so as to reduce the infiltration of debris that may wear against seal 43 as bit 10 rotates.

The dual-section structure of gap 41 also inhibits debris from entering between bearing surfaces 38 and 39. The structure of gap 41 is shown in more detail in FIGURE 2A. Typically, debris entering first section 52 will have insufficient momentum to flow into second section 54. Such debris will simply fall from section 52 back into annulus 16 instead of wearing on seal 43. Thus, both the positioning of the opening of gap 41 (adjacent to surface 25 and contiguous with the bottom edge of arm 21) and its dual-section structure provide seal 43 with debris-wear protection. Backface 31 preferably extends a sufficient distance X beyond the edge of shirrtail surface 25 to deflect the drilling fluid away from the opening of gap 41 which further prevents fluid-borne debris from contacting seal 43 and entering between bearing surfaces 38 and 39 via gap 41.

In accordance with another aspect of the present invention as best shown in FIGURE 3, cutter 11" and bit support arm 21 are uniquely constructed so that base portion 30" of cutter 11" interfits with spindle 23 which allows gap 41" to extend throughout its length in a direction substantially parallel to spindle axis 35. Specifically, gap 41" includes an outer cylindrical segment which intersects with shirrtail surface 25" and opens upwardly and outwardly from between spindle 23 and cutter 11" into borehole annulus 16. As a result, hard

metal surfaces may be positioned to better protect gap 41 against erosion, and the service life of seal 43 is lengthened, particularly over those prior art arrangements having a shirrtail tip with an underside that over time, may be exposed by erosion to borehole debris.

As shown in both FIGURES 2 and 3, the bottom of shirrtail 25 and 25" adjacent respectively to gaps 41 and 41" may be covered with a layer 46 of conventional hardfacing material to help protect against erosion widening gap 41 by eroding arm 21. A preferred hardfacing material comprises tungsten carbide particles dispersed within a cobalt, nickel, or iron-based alloy matrix, and may be applied using well known fusion welding processes.

As shown in FIGURE 2 additional protection against erosion may be achieved by spacing outer portion 33 and backface 31 of cutter 11 radially outward a distance X from hardfacing layer 46. Distance X allows backface 31 to deflect the flow of drilling fluid enough to prevent the fluid from flowing directly into the opening of gap 41. Distance X is a function of the borehole diameter and the bit type (no seal, seal, or double seal), and may range from 1/16" to 3/16". For one embodiment of the present invention, X is approximately 1/8".

For enhanced wearability of backface 31 on the cone side of gap 41, backface 31 is either provided with a hard material covering or made from hard metal. As will be explained later in more detail, the present invention allows forming backface 31 from a wide variety of hard materials. Backface 31 is preferably harder than the hardfacing material comprising layer 46, and is attached to outer portion 33 of base 30 without use of a filler material. Specifically, backface 31 may comprise a composition of material including tungsten carbide particles surrounded by a matrix of a copper, nickel,

iron, or cobalt based alloy that is applied directly over substantially the entire outer portion 33. Acceptable alternative hardfacing materials include carbides, nitrides, borides, carbonitrides, silicides of tungsten, niobium, vanadium, molybdenum, silicon, titanium, tantalum, hafnium, zirconium, chromium or boron, diamond, diamond composites, carbon nitride, and mixtures thereof. For some application, tungsten carbide particles with the size range given in Table 1 may be used to form backface 31.

In accordance with an important aspect of the present invention as illustrated in the embodiments of both FIGURES 2 and 3, cutters 11 and 11" each have a composite cone body with respective bases 30 and 30" formed separately from tip 29. Bases 30 and 30" may include a nonheat-treatable hard metal component having a higher degree of hardness than found in prior rotary cone cutters. In contrast, conical tip 29 may be made of a conventional heat-treated steel. With this construction, cone backface 31 is better able to withstand both erosion and abrasive wear, thus not only providing enhanced protection of seal 43, but also serving to better maintain the gage diameter of borehole wall 17, particularly when drilling a deviated or horizontal borehole.

An important feature of the present invention is that tip 29 may be manufactured from any hardenable steel or other high-strength engineering alloy which has the desired strength, toughness, and wear resistance to withstand the rigors of the specific downhole application. In an exemplary embodiment, tip 29 is manufactured from a 9315 steel having a core hardness in the heat-treated condition of approximately HRC 30 to 45, and having an ultimate tensile strength of 950 to 1480 MPa (138 to 215 ksi). Other portions of cutter 11, such as precision bearing surfaces 39, may also be formed from

this 9315 steel. In producing tip 29, the alloy is heat-treated and quenched in a conventional and well known manner to give tip 29 the desired degree of hardness.

5 An equally important feature of the present invention is that base portions 30 and 30" may be designed and fabricated from materials which enhance the service life of respective roller cone cutter 11 and 11" without limiting the performance of associated tip 29. In the illustrated embodiments of FIGURES 2 and 3, base 10 30 and 30" comprise a low-alloy steel core 32 onto which is affixed continuous layer or coating 49 of hard metal. A low-alloy steel typically has between approximately 2 and 10 weight percent alloy content. Core 32 may also be referred to as a "matrix ring." Core 32 is preferably a 15 ring-shaped piece of the same material composition as tip 29, but of less expensive steel alloy which is not quench hardenable such as low carbon steel. In affixing layer 49, the exterior of steel core 32 is machined to size to receive the desired coating, and placed into a prepared 20 mold (not shown) whose cavity is shaped to provide the desired coating thickness for layer 49 and frustoconical shape for outer portion 33.

For some applications, matrix ring or core 32 is an infiltrant alloy comprising Mn 25 weight percent, Ni 15 25 weight percent, Zn 9 weight percent, and Cu 51 weight percent. This alloy has good melt and flow characteristics, and good wettability for both tungsten carbide and steel. A typical hardfacing layer 49 may comprise between 20% and 40% infiltrant alloy by volume.

30 Techniques for the application of hardfacing layer 49 are well known in the art. One technique is an atomic hydrogen or oxyfuel welding process using a tube material containing ceramic particles in a Ni, Co, Cu or Fe based matrix. A second technique is the Thermal Spray or 35 Plasma Transfer Arc process using powders containing ceramic particles in a Ni, Co, Cu or Fe based matrix.

This technique is discussed in U.S. Patent 4,938,991. Both the first and second techniques may be performed either by hand or by robotic welder. A third technique is disclosed in U.S. patent 3,800,891 (see columns 7, 8 and 9).

Alternatively, hardfacing layer 49 may be applied by a slurry casting process in which hard particles, such as the alternative hardfacing materials described for the preferred embodiment, are mixed with a molten bath of ferrous alloy. Alternatively, the molten bath may be of a nickel, cobalt, or copper based alloy. This mixture is poured into a mold and solidifies to form base portion 30. Grooves 12 may be molded during the application of hard facing layer 49, or may be cut into layer 49 after it has been applied to matrix ring 32.

The prepared mold for one embodiment is milled or turned from graphite. Each internal surface that will contact steel core 32 is painted with brazing stop off, such as Wall Colmonoy's Green Stop Off® paint. Also painted are the surfaces of steel core 32 that will not be coated with hardfacing layer 49. Preferably, the mold is designed so that the thermal expansion of steel core 32 will not stress the fragile graphite mold parts.

Steel core 32 is assembled within the painted mold. The hard particles which form hardfacing layer 49 are then distributed within the mold cavity. TABLE 1 shows the sizes and distribution of the hard particles for the preferred embodiment.

TABLE I

U. S. Mesh	Weight %
+80	0 - 3
-80 +120	10 - 18
-120 +170	15 - 22
-170 +230	16 - 25
-230 +325	10 - 18
-325	28 - 36

Next, a vibration is applied to the mold to compact the layer of loose particles within the mold cavity. The infiltrant alloy is then placed in the material distribution basin above the hard particle layer in the cavity. If the infiltration operation is performed in an air furnace, powdered flux is added to protect the alloy. If the operation is performed in a vacuum or protective atmosphere, flux is not required.

In utilizing the mold, tungsten carbide powder or another suitable material is dispersed within the cavity to fill it, and an infiltrant alloy is positioned relative to the mold. Then the infiltrant alloy and the mold are heated within a furnace to a temperature at which the alloy melts and completely infiltrates the mold cavity, causing the carbide particles to bond together and to steel core 32.

Alternatively, base 30 can be made as a casting of composite material comprised of hard particles, such as Boron Carbide (B_4C), Silicon Nitride (Si_3N_4), or Silicon Carbide (SiC), in a tough ferrous matrix such as a high strength, low alloy steel, or precipitation hardened stainless steel. In the form of fibers or powders, these particles can reinforce such a matrix. This matrix may be formed either by mixing the particles with the molten alloy and casting the resultant slurry, or by making a

preform of the particles and allowing the molten alloy to infiltrate the preform. Base 30 may be attached to tip 29 by inertia welding or similar techniques to form composite rotary cone cutter 11.

5 Once both base 30 (made in a manner other than the above-described composite-material casting process) and tip 29 are made, these two separate parts are joined together in a manner which is substantially non-destructive of the desirable characteristics of each.
10 Preferably, they are joined together along a weld line 50 (FIGURE 2) utilizing the process of inertia welding wherein one part is held rotationally stationary while the other is rotated at a predetermined speed that generates sufficient localized frictional heat to melt
15 and instantaneously weld the parts together without use of a filler. This process employs a conventional inertia welding machine that is configured to allow variation of the rotating mass within the limitations of the machine's mass-rotating capacity and to rotate the mass at a
20 controllable and reproducible rate. Once the rotating part is at the predetermined rotational speed, the parts are brought into contact with a predetermined forging force sufficient to completely deform a premachined circumferential ridge which is 0.191 inches wide and
25 0.075 inches high. The rotational speed is empirically determined with test parts of the same size, alloy, and prejoining condition. The complete deformation allows two planar facing surfaces on the parts being joined to come into contact.

30 In one example, base 30 having a volume of 4.722 cubic inches and a weight of 1.336 lbs. was successfully joined to a tip 29 having a volume of 16.69 cubic inches and a weight of 4.723 lbs. using a 44,000 lb. axial load and a rotational speed of 2200 rpm.

35 As best shown in FIGURE 2, rotary cone cutter 11 may be formed by inertially welding base 30 with tip 29. A

circumferential flange or ridge 112 may be provided on the interior of base 30 to engage with recess 114 formed in the adjacent portion of tip 29. Circumferential flange 112 cooperates with recess 114 to establish the
5 desired alignment of base 30 with tip 29 during the inertial welding process. During later steps in the assembly of rotary cone cutter 11, elastomeric seal 43 may be disposed within recess 114.

FIGURES 4A-D show base portion 30, 130, 230 and 330
10 respectively which may be coupled with tip 29 as previously described to provide a composite cone cutter incorporating various alternative embodiments of the present invention. An important benefit of the present invention includes the ability to use same tip 29 with
15 various base portions or backface rings. FIGURE 4A is an enlarged drawing showing base portion or backface ring 30 as previously described with respect to composite cone cutter 11. Backface ring 30 includes opening 44 which is sized to be compatible with cavity 36 and to allow
20 installation of spindle 23 within cavity 36 of associated cone cutter 11. Layer 49 of the desired hard facing material is preferably disposed on the exterior of outer portion 33 to form backface 31.

Backface ring 130 incorporating an alternative
25 embodiment of the present invention is shown in FIGURE 4B. Outer portion 33 of backface ring 130 includes a plurality of generally cylindrical shaped inserts 132. For one application, inserts 132 have a thickness or height of approximately 0.080". The thickness of inserts
30 132 is limited in part by the thickness of the associated matrix ring or steel core 32. Inserts 132 may be formed from various types of material such as sintered carbide, thermally stable diamonds, diamond particles, or any of the other materials used to form layer 49.

35 Backface ring 230 incorporating another alternative embodiment of the present invention is shown in FIGURE

4C. A plurality of inserts 232 are provided in outer portion 33 of backface ring 230. Inserts 232 have a generally triangular cross-section as compared to the circular cross-section of inserts 132. Otherwise,
5 inserts 232 may be fabricated from the same materials as previously described with respect to insert 132.

Backface ring 330 incorporating still another alternative embodiment of the present invention is shown in FIGURE 4D. A plurality of inserts 332 are provided in
10 outer portion 33 of backface ring 330. Inserts 332 may be natural diamonds and/or artificial diamonds which have been cast as an integral part of backface ring 330. Inserts 342 represent smaller diamonds or diamond chips cast as an integral part of backface ring 330. The
15 present invention allows varying the size, location, and number of diamonds or diamond chips used to form outer portion 33 depending upon the intended use for the resulting rotary drill bit.

Although the present invention and its advantages
20 have been described in detail, it should be understood that various changes, substitutions and alterations can be made therein without departing from the spirit and scope of the invention as defined by the appended claims.

**WHAT IS CLAIMED IS:**

1. A rotary cone drill bit for forming a borehole, said drill bit comprising:

5 a body with an underside and an upper end portion adapted for connection to a drill string for rotation of said body;

10 a number of angularly-spaced arms integrally formed with said body and depending therefrom, each of said arms having an inside surface with a spindle connected thereto and a cone cutter rotatably mounted on each of said spindles; and

15 each of said cutters including an internal generally cylindrical wall defining a cavity for receiving said spindle and a generally conical composite cutter body having a base with a backface including an exposed surface portion formed of a hard material and having a tip formed of a conventional steel material, wherein said base comprises a ring formed separately from said tip.

20 2. The drill bit as defined by Claim 1 wherein each of said cutters comprises a generally conical cutter body having said base defining a cavity opening and said tip pointed away from said cavity opening, an outer portion of said base having a generally frustoconical shape directed away from said tip and surrounding said
25 cavity opening, and said outer portion having a layer of hard metal material thereon to form said backface.



3. The drill bit as defined by Claim 1 wherein each of said cutters comprises a generally cylindrical gap defined between said spindle and cavity wall, said gap having an outer segment thereof intersecting with and opening upwardly and outwardly from said arms, an outer sealing surface in said cavity wall concentric with an inner sealing surface, and a seal element sealing between said inner and outer sealing surfaces.

4. The drill bit as defined by Claim 1 wherein said base extends radially and axially with respect to said spindle such that, proximate a shirrtail surface, said backface extends a distance beyond said shirrtail surface towards a sidewall of said borehole.

5. The drill bit as defined by Claim 1 wherein said hard material is incompatible with conventional heat-treating processes used to form said tip.

6. The drill bit as defined by Claim 1 wherein each of said cutters further comprises said tip being heat-treated and said base being secured to said tip non-destructively of the heat treatment of said tip by inertial welding.

7. The drill bit as defined by Claim 1 wherein said base includes a central core formed of a conventional steel material and said hard material is layered on said central core.



8. A rotary cone cutter for boring engagement with a side wall and bottom of a borehole comprising:

a generally conical composite body having a central axis, a tip having a plurality of inserts protruding therefrom and a base connected to said tip to form said composite body;

a cavity formed in said body along said axis and opening from said base into said tip;

an annular backface formed on an outer portion of said base; and

said backface having a hard material positioned for engagement with the side wall of said borehole and said base comprising a ring formed separately from said tip.

9. The rotary cone cutter as defined by Claim 8 including a plurality of cutting edges formed in said hard material.

10. The rotary cone cutter as defined by Claim 9 wherein said cutting edges are formed in said hard material by grooves extending in a generally radial direction across said backface.

11. The rotary cone cutter as defined by Claim 8 wherein said backface further comprises a low alloy steel core with said outer portion of said base disposed upon said core and said outer portion including a layer of said hard material.



12. The rotary cone cutter as defined by Claim 8 further comprising said hard material selected from the group consisting of tungsten carbide, nitrides, borides, carbon nitrites, silicides of tungsten, niobium, benadium, malipthium, silicon, titanium, tantalum, athnium, zirconium, chromium, boron, diamonds, diamond particles, carbon nitrides, or mixtures thereof.

13. The rotary cone cutter as defined by Claim 8 wherein said hard material comprises a plurality of diamonds disposed in said outer portion of said base.

14. The rotary cone cutter as defined by Claim 8 wherein said hard material comprises tungsten carbide particles surrounded by a matrix selected from the group consisting of copper, nickel, iron, or cobalt based alloys disposed on the exterior of said outer portion.



15. In a rotary rock bit for forming a borehole, the improvement comprising a generally conical composite cutter body having a base with an exterior surface formed of a hard material incompatible with conventional heat-treatment processes, and a tip formed of a heat-treated alloy steel, said base being secured to said tip in a manner compatible with both said hard material and said alloy steel wherein said base comprises a ring formed separately from said tip.

16. The rotary rock bit as defined by Claim 15 wherein said tip is secured to said base along a weld line.

17. The rotary rock bit as defined by Claim 16 wherein said weld line is created by an inertial welding process.

18. The rotary rock bit as defined by Claim 15 wherein said backface further comprises a low alloy steel core with said outer portion of said base disposed upon said core and said outer portion including a layer of said hard material.

19. The rotary rock bit as defined by Claim 15 further comprising said hard material selected from the group consisting of tungsten carbide, nitrides, borides, carbon nitrides, silicides of tungsten, niobium, benadium, malipthium, silicon, titanium, tantalum, athnium, zirconium, chromium, boron, diamonds, diamond particles, carbon nitrides, or mixtures thereof.

20. The rotary rock bit as defined by Claim 15 wherein said hard material comprises a plurality of diamonds disposed in an outer portion of said base.



21. The rotary rock bit as defined by Claim 15 wherein said hard material comprises tungsten carbide particles surrounded by a matrix selected from the group consisting of copper, nickel, iron, or cobalt based alloys disposed on the exterior of said base.
- 5



22. A method of manufacturing a rotary cone drill bit with a plurality of roller cone cutters having a generally conical configuration and a composite cone body having a base with a backface formed of a hard material and a tip comprising the steps of:

constructing said base;
constructing said tip; and
joining together said previously constructed tip and base by inertial welding.

23. The method of Claim 22 wherein constructing said base further comprises the steps of:
depositing a desired coating thickness of powdered metal on a low alloy steel core; and
heating said steel core and said powdered metal together to bond said powdered metal with said steel core.

24. The method of Claim 23 further comprising the steps of shaping a portion of a central core of steel to receive a layer of hard metal material, and forming said layer of hard metal material on said central core within said shaped portion.

25. The method of Claim 24 further comprising the step of forming a plurality of radial grooves in said layer of hard metal material.



26. A support arm-cutter assembly of a rotary cone drill bit having a body, the assembly comprising:

5 a support arm integrally formed with said body and having an inner surface;

a spindle attached to said inner surface and angled downwardly with respect to said support arm;

a portion of said spindle defining an inner sealing surface;

10 a cutter having a body with a cavity and an opening for receiving said spindle;

said cutter body formed by a base portion with a tip joined thereto wherein said base comprises a ring formed separately from said tip;

15 a portion of said cavity defining an outer sealing surface concentric with said inner sealing surface;

a seal for forming a fluid barrier between said inner and outer sealing surfaces; and

20 a gap formed between said cavity and said spindle, a first portion of said gap substantially perpendicular to an axis of said spindle, a second portion of said gap substantially parallel to said axis of said spindle, and said gap having an opening contiguous with a bottom edge of said support arm.

25 27. The assembly of Claim 26 wherein said gap extends from said opening to said seal.

30 28. The assembly of Claim 26 wherein said cutter comprises a backface on said base portion, said base portion extending radially and axially such that, proximate a shirrtail surface, said backface extends a distance beyond the shirrtail surface towards a sidewall of a borehole.



29. The assembly of Claim 26 wherein a second portion of said cavity comprises an outer bearing surface and a second portion of said spindle comprises an inner bearing surface concentric with said outer bearing surface, said seal disposed between said opening and said bearing surfaces.

30. The assembly of Claim 26 wherein said spindle, said cavity and said second portion of said gap are cylindrically shaped.

31. The assembly of Claim 26 wherein said first portion of said gap is planar and said second portion of said gap is cylindrical.



32. A rotary cone drill bit for forming a borehole, comprising:

a body with an upper end portion adapted for connection to a drill string, for rotating said body;

a number of angularly-spaced arms integrally formed with and depending from said body, each of said arms comprising:

an inside surface;

a spindle having a generally cylindrical end portion connected to said inside surface of its respective arm;

said spindle projecting generally downwardly and inwardly with respect to said respective arm;

said end portion having an inner sealing surface thereon; and

a plurality of cone cutters equaling said number of arms mounted respectively on one of said spindles, each of said cutters comprising:

an internal generally cylindrical wall defining a cavity for receiving said respective spindle, said cavity having an end opening;

an outer sealing surface in said cavity wall concentric with said inner sealing surface; and

a cutter end portion surrounding said end opening;

a seal element for forming a fluid barrier between said inner and outer sealing surfaces; and

a gap having first and second sections, said first section between an inner portion of said arm and said cutter end portion, said second section between said spindle and said cavity wall, said first section generally perpendicular to said second section and an axis of said spindle, and said first section having an opening intersecting with said arm;



said cutters further comprising a generally conical cutter body having:

a tip pointed away from said cavity opening;

a base, connected to said tip, for partially

5 defining said cavity opening wherein said base comprises a ring formed separately from said tip;

said base having a backface surrounding said cavity opening;

10 said backface having a generally frustoconical shape directed away from said tip; and

a layer of hardfacing material disposed on an outer portion of said base to form said backface.



33. The rotary cone drill bit as defined by Claim 32 wherein each of said cutters further comprises a generally conical composite cutter body comprising:

5 said tip formed of a conventional steel alloy;
 said base coupled to said tip having said backface
formed of a hard metal material.


34. The rotary cone drill bit as defined by Claim
32 wherein said base is generally ring-shaped and formed
10 separately of said tip.

35. The rotary cone drill bit as defined by Claim
33 wherein said hard metal material is incompatible with
conventional heat-treating processes associated with said
15 tip.

36. The rotary cone drill bit as defined by Claim
35 wherein said tip is heat-treated and said base is
secured to said tip non-destructively of said heat
20 treatment of said tip by inertial welding.

37. The rotary cone drill bit as defined by Claim
32 wherein said base comprises:
 a central core formed of a conventional steel
25 material; and
 said hard metal material forms a layer on said core.

1/6

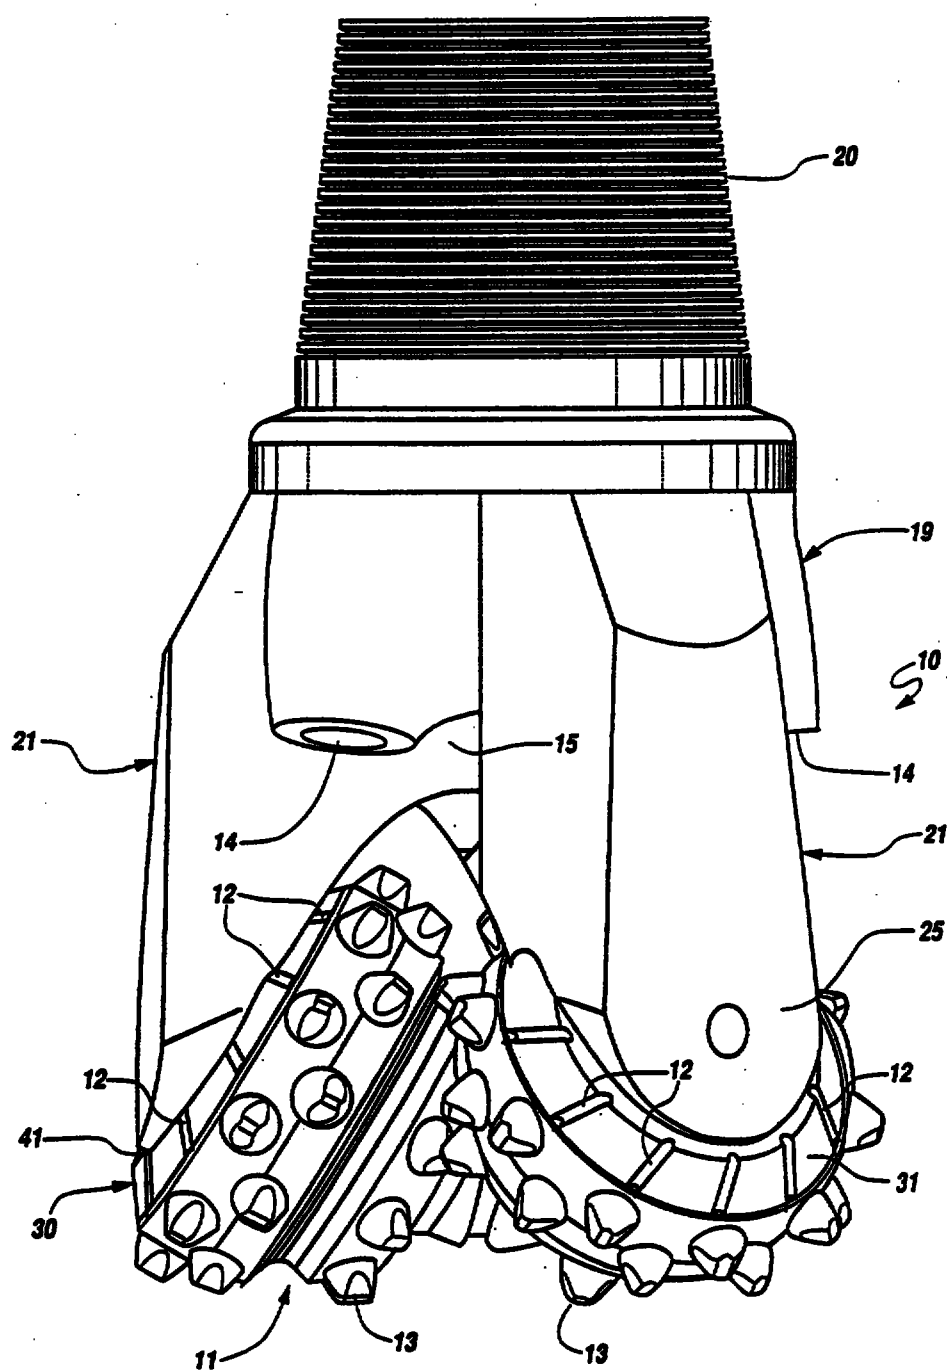**Fig.1**

3/6




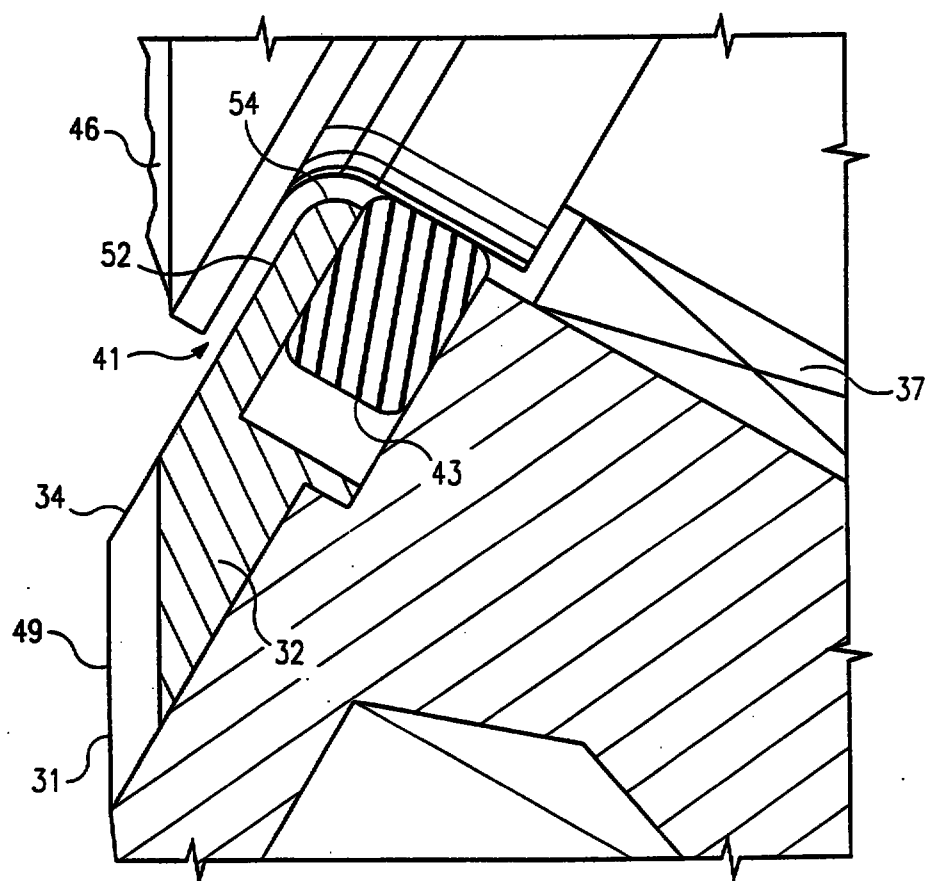


Fig. 2A

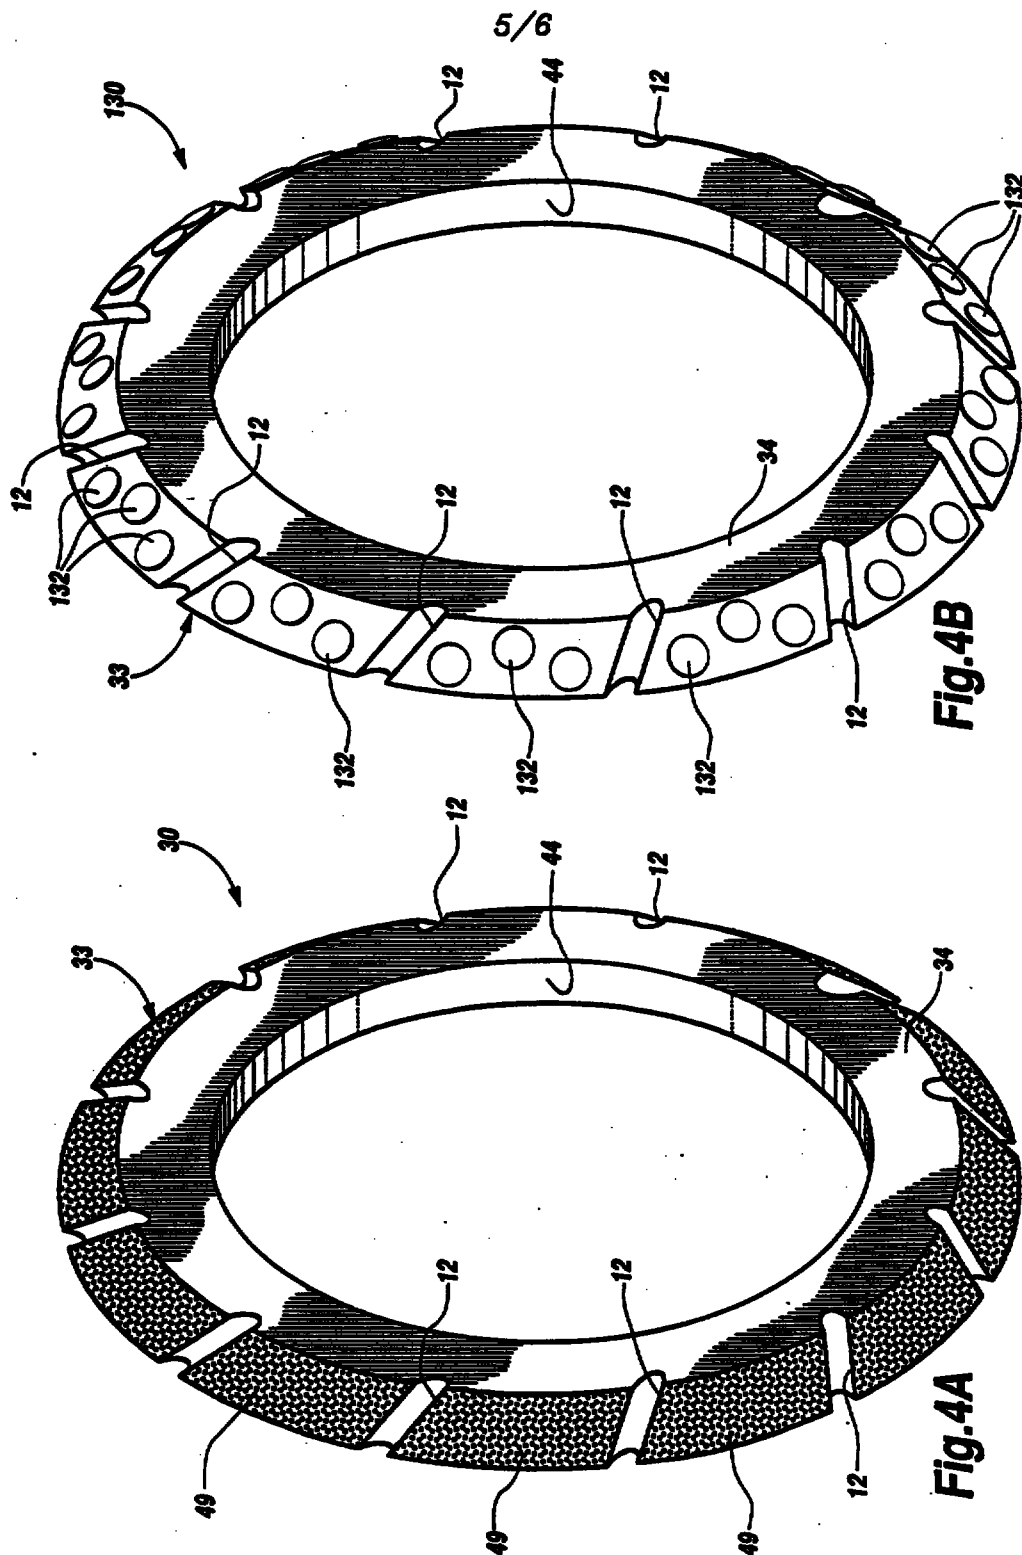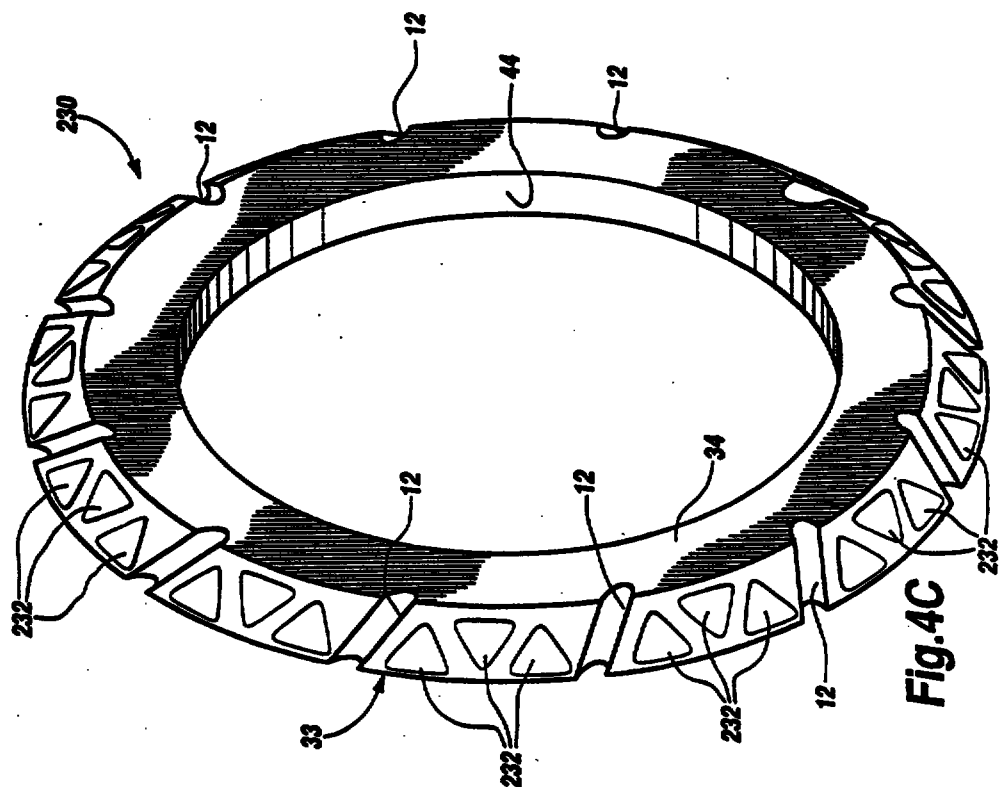

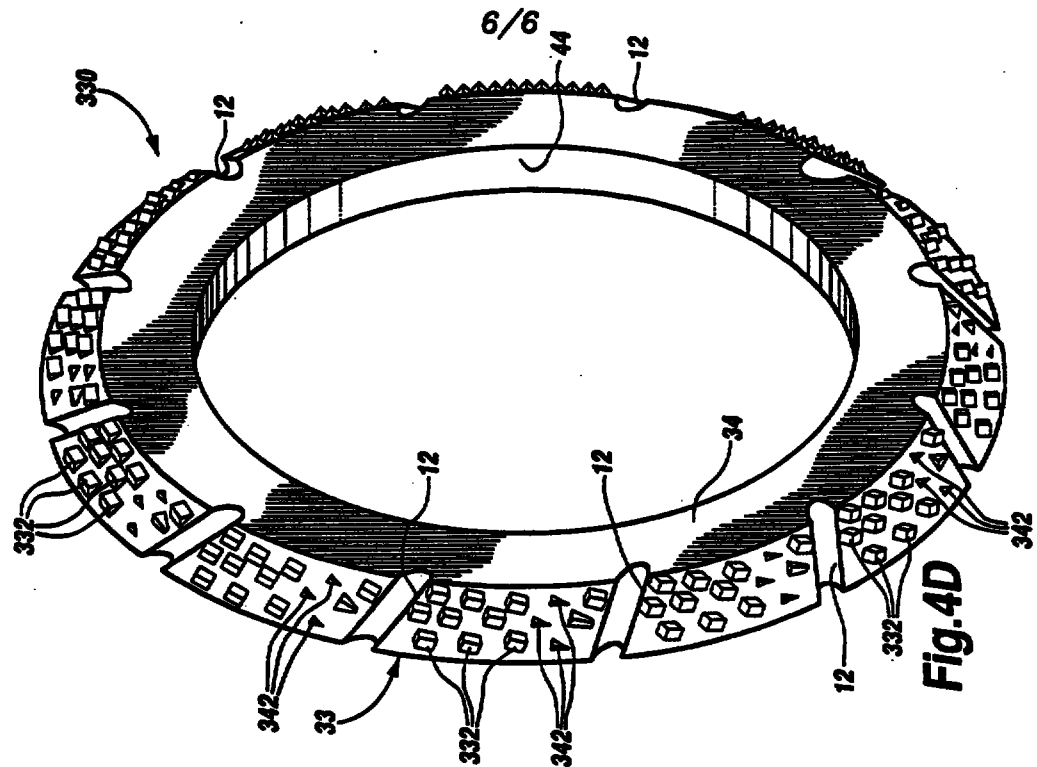

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁶:

E21B 10/22, B23K 20/12

A1

(11) International Publication Number:

WO 95/27121

(43) International Publication Date:

12 October 1995 (12.10.95)

(21) International Application Number: PCT/US95/03902

(22) International Filing Date: 31 March 1995 (31.03.95)

(30) Priority Data:

08/221,371

31 March 1994 (31.03.94)

US

(71) Applicant: DRESSER INDUSTRIES, INC. [US/US]; Suite 4100, 2001 Ross Avenue, Dallas, TX 75201-2916 (US).

(72) Inventors: BLACKMAN, Mark, Philip; 1513 Summerwind, Lewisville, TX 75067 (US). BIRD, Jay, Stuart; 312 Brown Street, Waxahachie, TX 75165 (US). BEATON, Michael, Steve; 1501 Fuller Drive, Cedar Hill, TX 75104 (US).

(74) Agent: FELGER, Thomas, R.; Baker & Botts, L.L.P., 2001 Ross Avenue, Suite 800, Dallas, TX 75201-2916 (US).

(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, MX, NL, NO, NZ, PL, PT, RO, RU, SD, SE, ~~SG~~ SI, SK, TJ, TM, TT, UA, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG).

Published


With international search report.

SG copy

(54) Title: ROTARY DRILL BIT WITH IMPROVED CUTTER

(57) Abstract

A rotary cone drill bit (10) having a number of angularly-spaced arms (21) integrally formed with a body (19), each arm (21) having a spindle (23) and an outer shirrtail surface (25). Each spindle (23) has a generally cylindrical upper end portion and an inner sealing surface. A number of rotary cone cutters (11) equal to the number of arms (21) are mounted on respective spindles (23). Each cutter includes an internal cylindrical wall, a gap (41) with a generally cylindrical portion defined between the spindle (23) and cavity wall, an outer sealing surface and a seal element (43) spanning the gap (41) and sealing between the inner and outer sealing surfaces. The cutters (11) are preferably composites formed from different types of material.

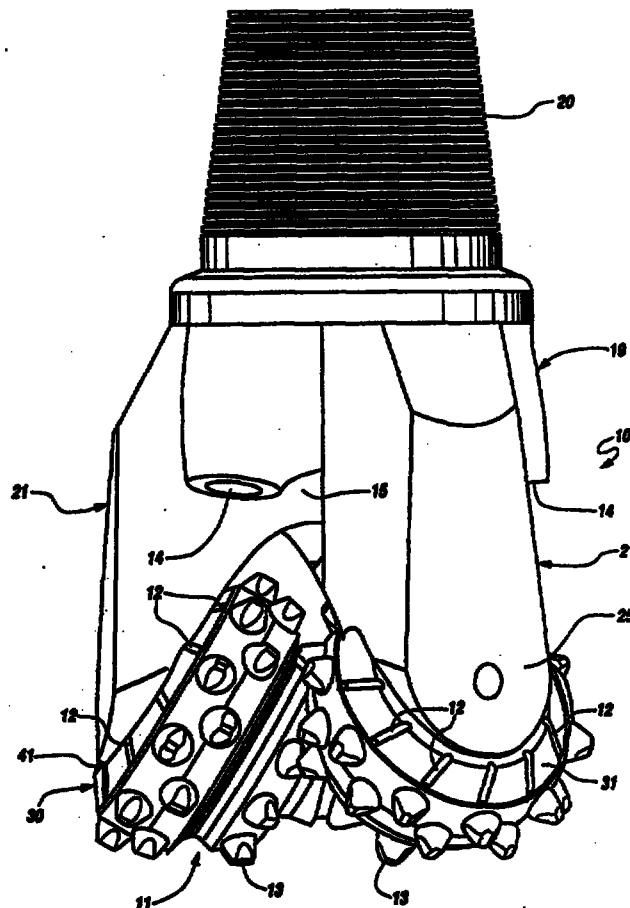

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

96 1 1398 - 0