



(51) International Patent Classification:
F41G 11/00 (2006.01)

(21) International Application Number:
PCT/IL2013/050115

(22) International Filing Date:
7 February 2013 (07.02.2013)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant: **MEPROLIGHT LTD** [IL/IL]; 58 Hazait Street, P.O.Box 26, 30600 Or Akiva (IL).

(72) Inventors: **VERBA, Gregory**; Ha Galil 11/7, 32241 Haifa (IL). **SEGEL, Doron**; Harzit 27/7, 42490 Netanya (IL).

(74) Agents: **AGMON, Jonathan** et al.; SOROKER - AGMON, Advocates and Patent Attorneys, Nolton House, 14 Shenkar Street, 46725 Herzeliya Pituach (IL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: SHOCK PROTECTION FOR WEAPON MOUNTED DEVICES

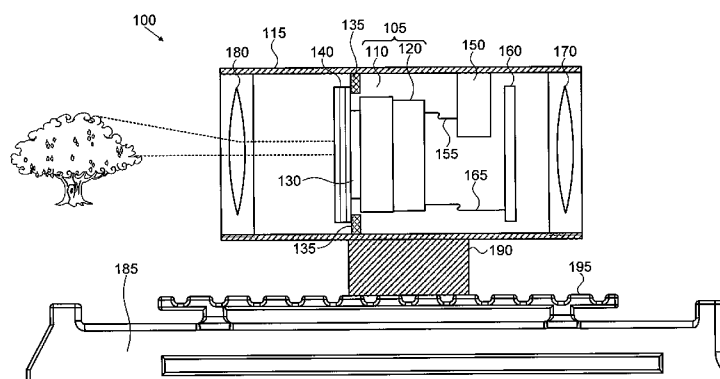


FIG. 2

(57) Abstract: A device for mounting on a weapon or weapon station, including, an encasement (115) for enclosing the device, a core element (105) that provides a functionality of the device, a planar spring (140) that is connected internally to a side of the encasement; and wherein the core element is coupled to one side of the planar spring, so that the core element is not in physical contact with the encasement.

