



(43) International Publication Date
3 January 2014 (03.01.2014)

(51) International Patent Classification:
E04C 5/16 (2006.01)

(21) International Application Number:
PCT/AU2013/000694

(22) International Filing Date:
26 June 2013 (26.06.2013)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2012902731 27 June 2012 (27.06.2012) AU

(71) Applicant: **M3S HOLDINGS PTY LTD** [AU/AU]; c/o:-
Suite 1, 10 Benson Street, Toowong, Brisbane, Queensland
4066 (AU).

(72) Inventor: **PROWSE, Steven**; c/o:- Suite 1, 10 Benson
Street, Toowong, Brisbane, Queensland 4066 (AU).

(74) Agent: **PEGASUS IP**; PO Box 160, Toowong, Brisbane,
Queensland 4066 (AU).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: COMBINATION REINFORCING COUPLER AND COLUMN ALIGNMENT DEVICE

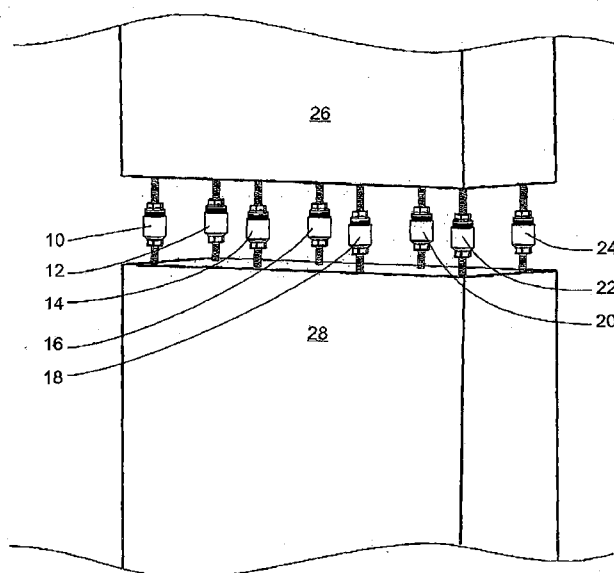


Fig. 1

(57) Abstract: An apparatus for aligning and joining construction elements comprising threaded studs or bars protruding from opposing elements; interlocking members adapted to screw together associated with each of the opposed studs; an adjustment nut screwable on one of the studs wherein, the adjustment nut is screw jacked against one of the interlocking members to align the elements and then locked and encapsulated by screwing together the interlocking members. There can be additional stud or bar alignment means associated with the apparatus.