




[図1]

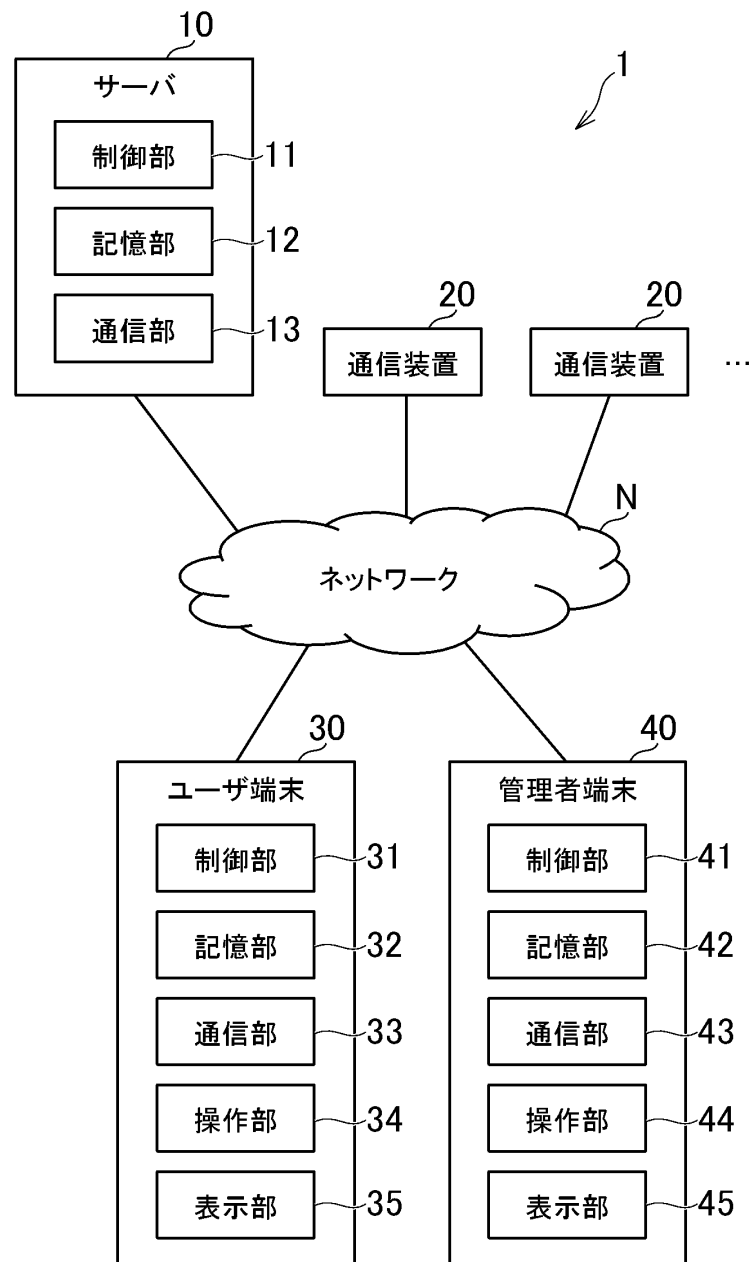


[図2]

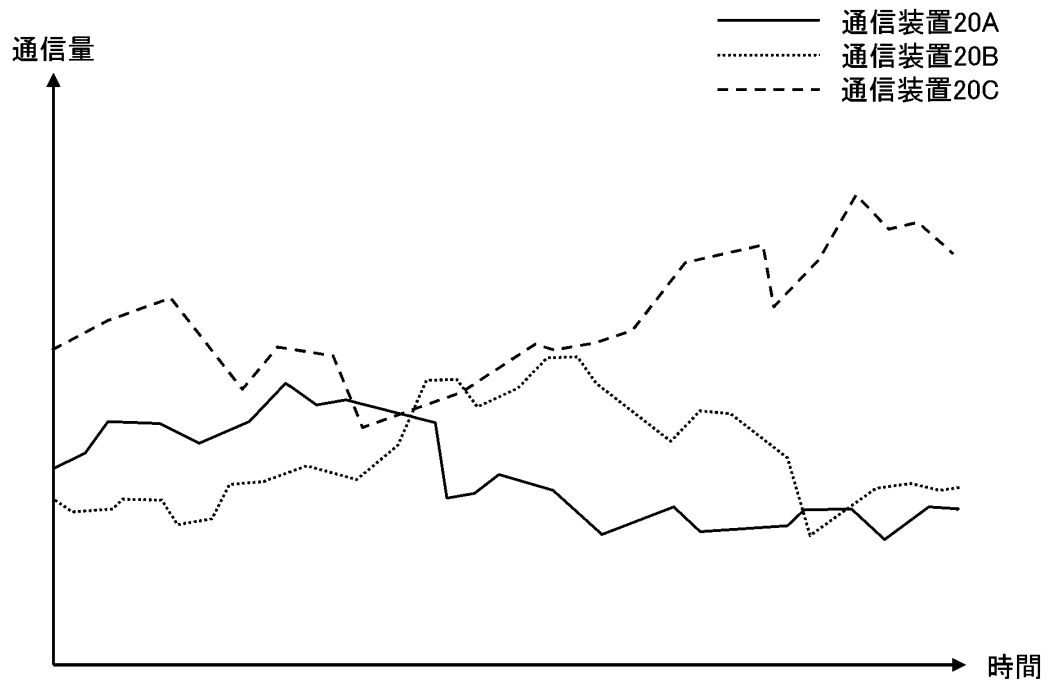


[図3]

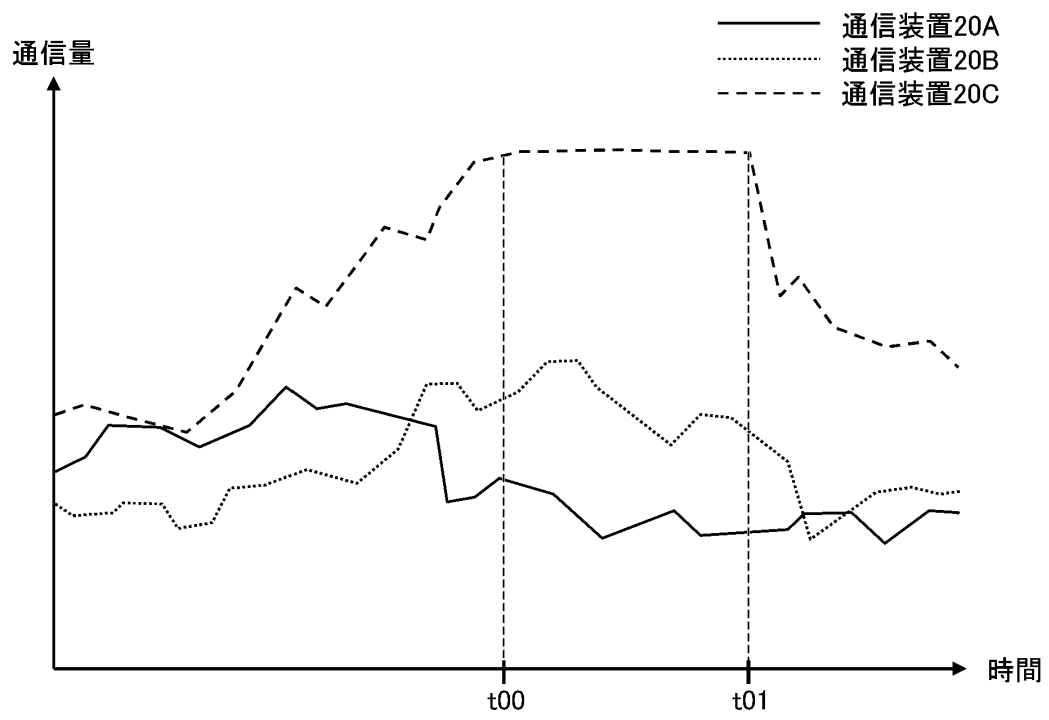

[図4]

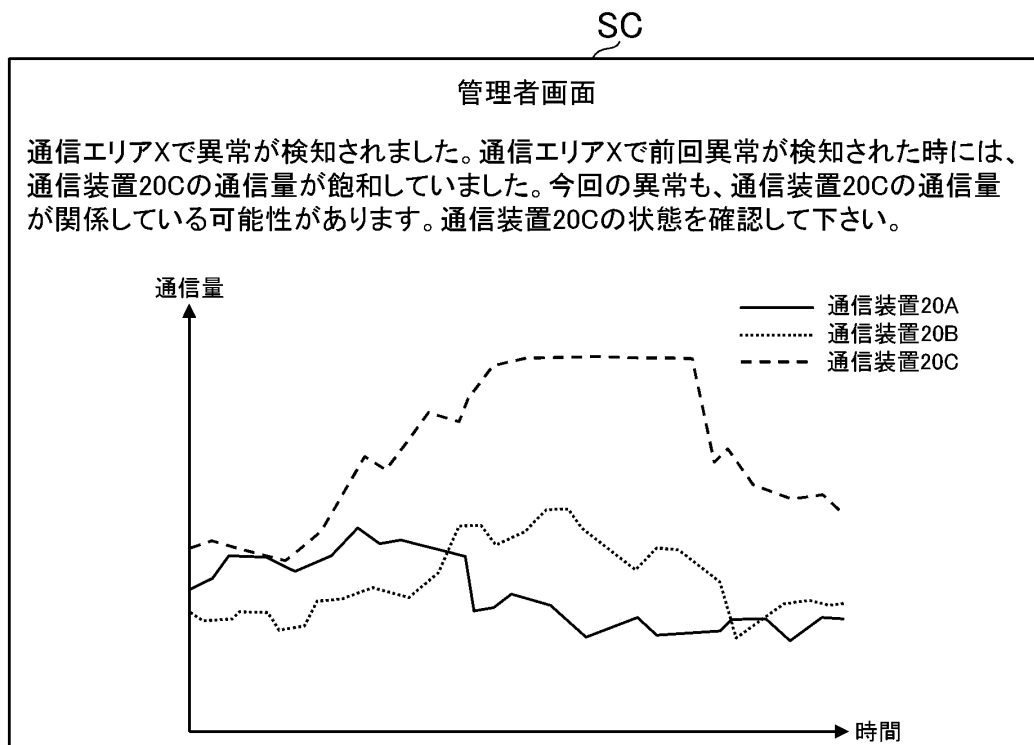

[図5]

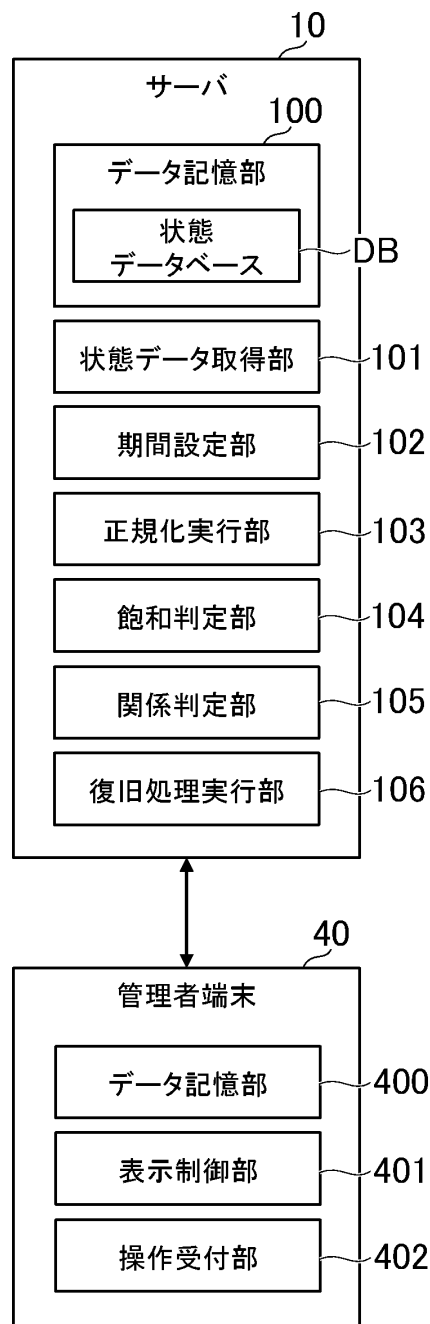


[図6]


DB

通信装置	状態データ
20A	状態データA
20B	状態データB
20C	状態データC
⋮	⋮
⋮	⋮
⋮	⋮


[図7]

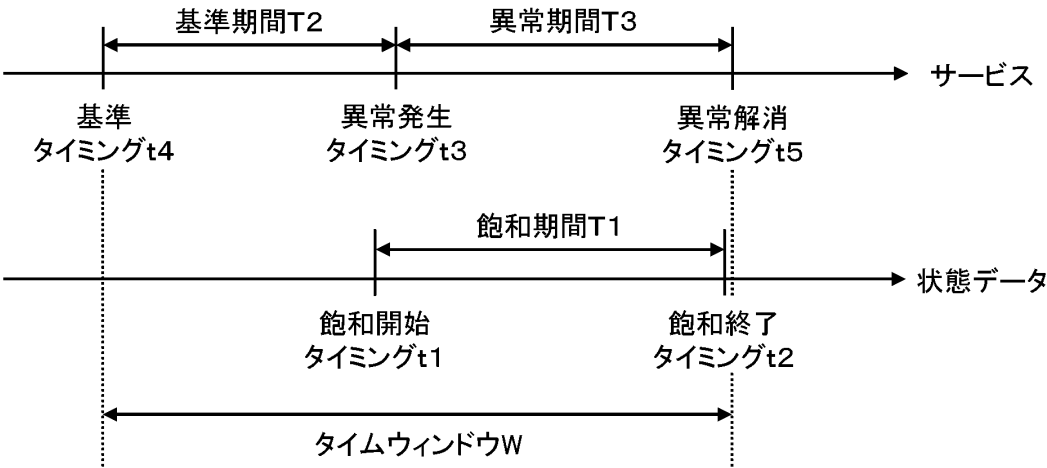



[図8]

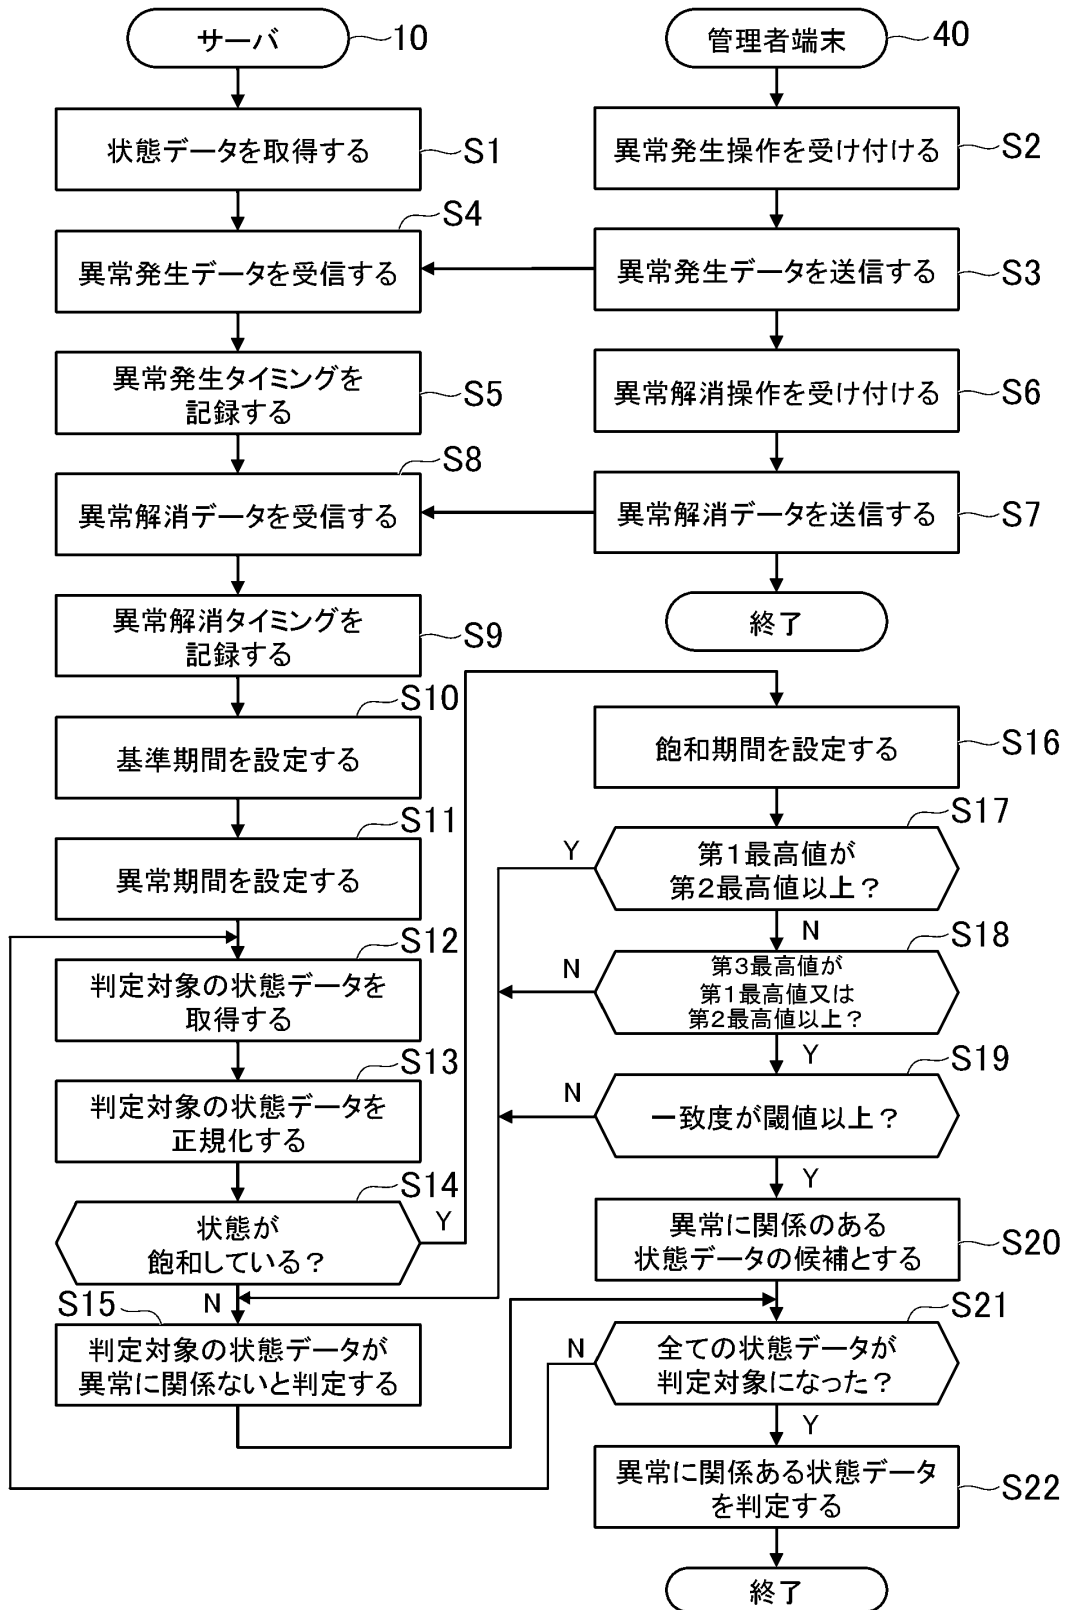


[図9]

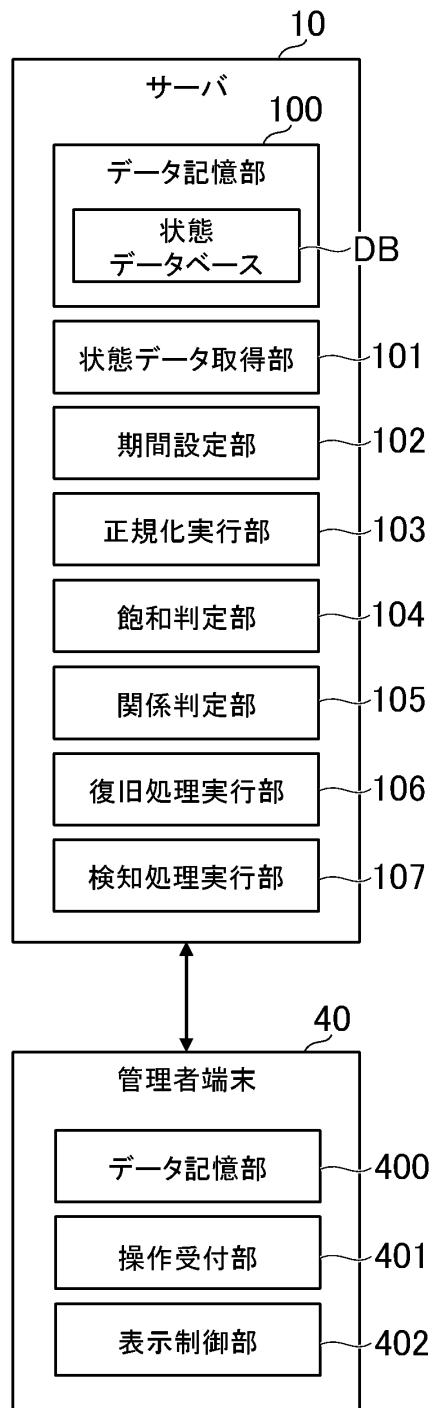


[図10]

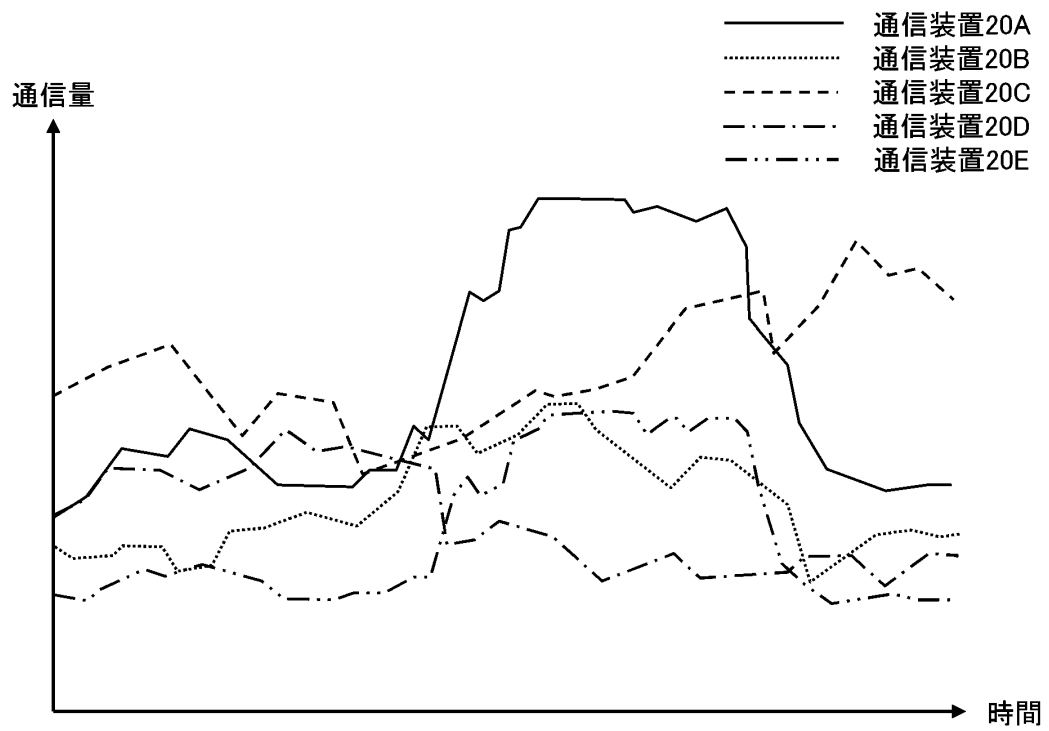


状態データの関連性を特定

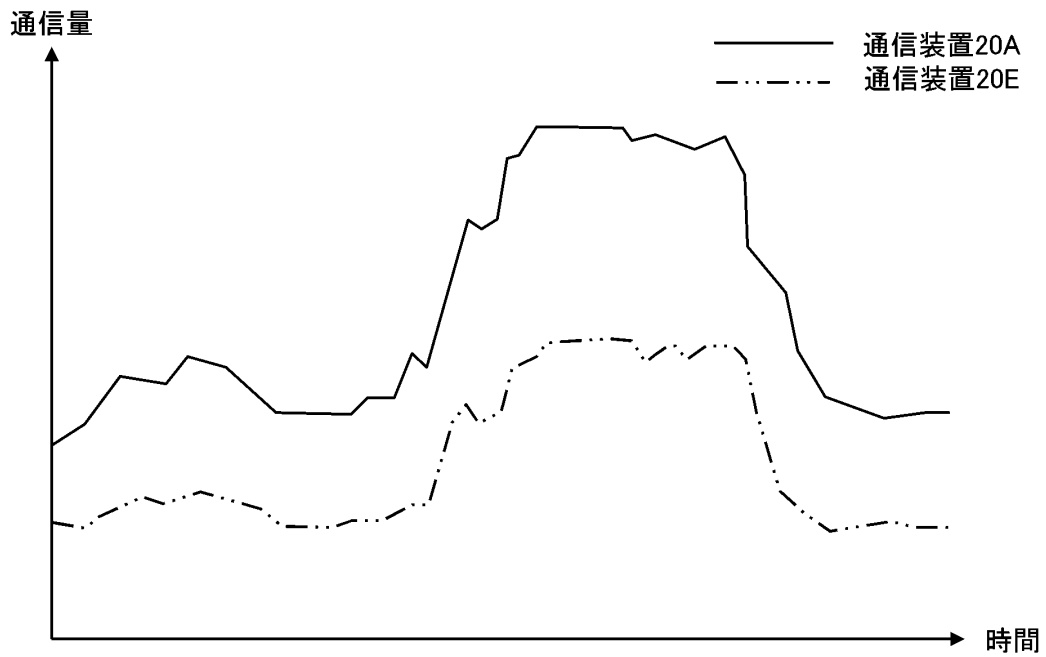

[図11]

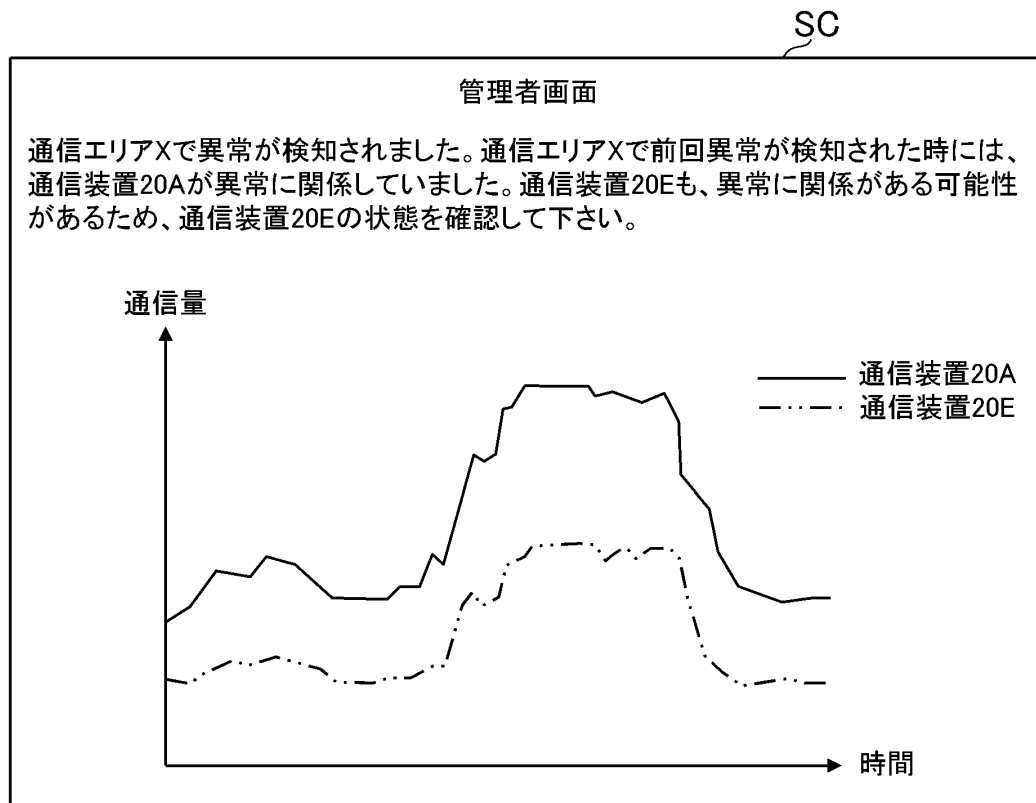

[図12]

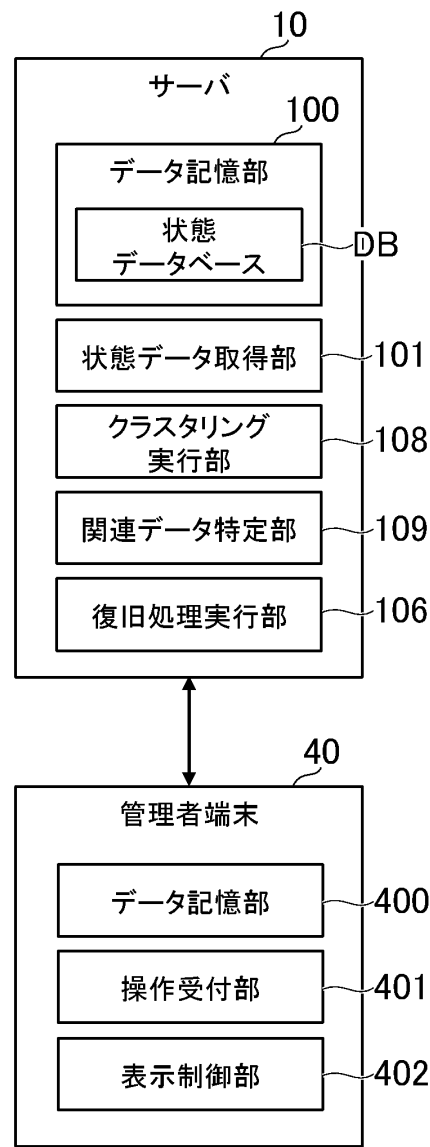


[図13]


DB

通信装置	状態データ	異常要因識別情報	関連識別情報
20A	状態データA	エリアXの異常の要因	-
20B	状態データB	-	-
20C	状態データC	-	-
20D	状態データD	-	-
20E	状態データE	-	通信装置20Aの状態データと関連性有り
⋮	⋮	⋮	⋮
⋮	⋮	⋮	⋮
⋮	⋮	⋮	⋮

[図14]

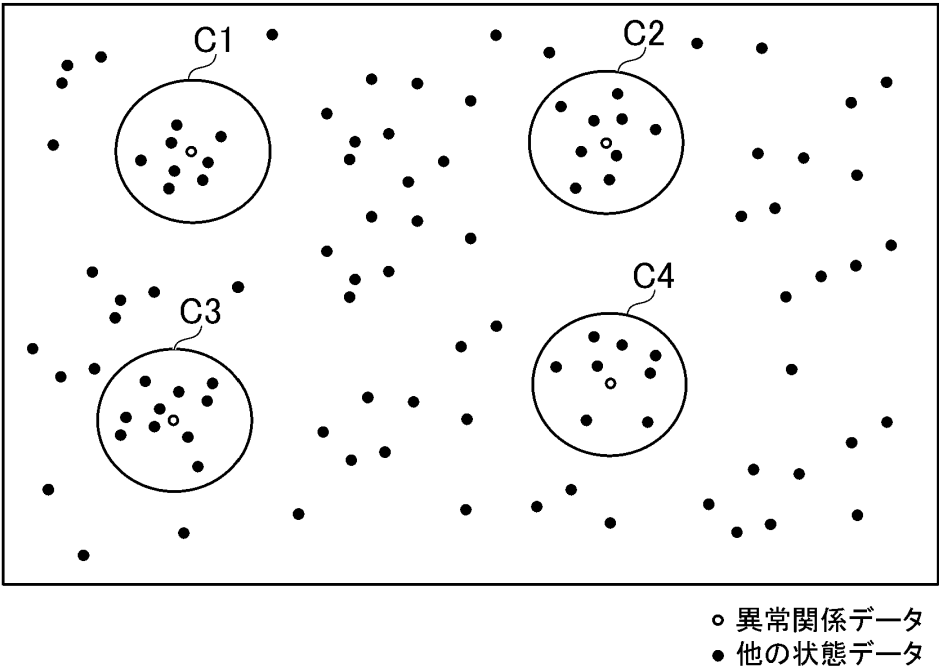

[図15]

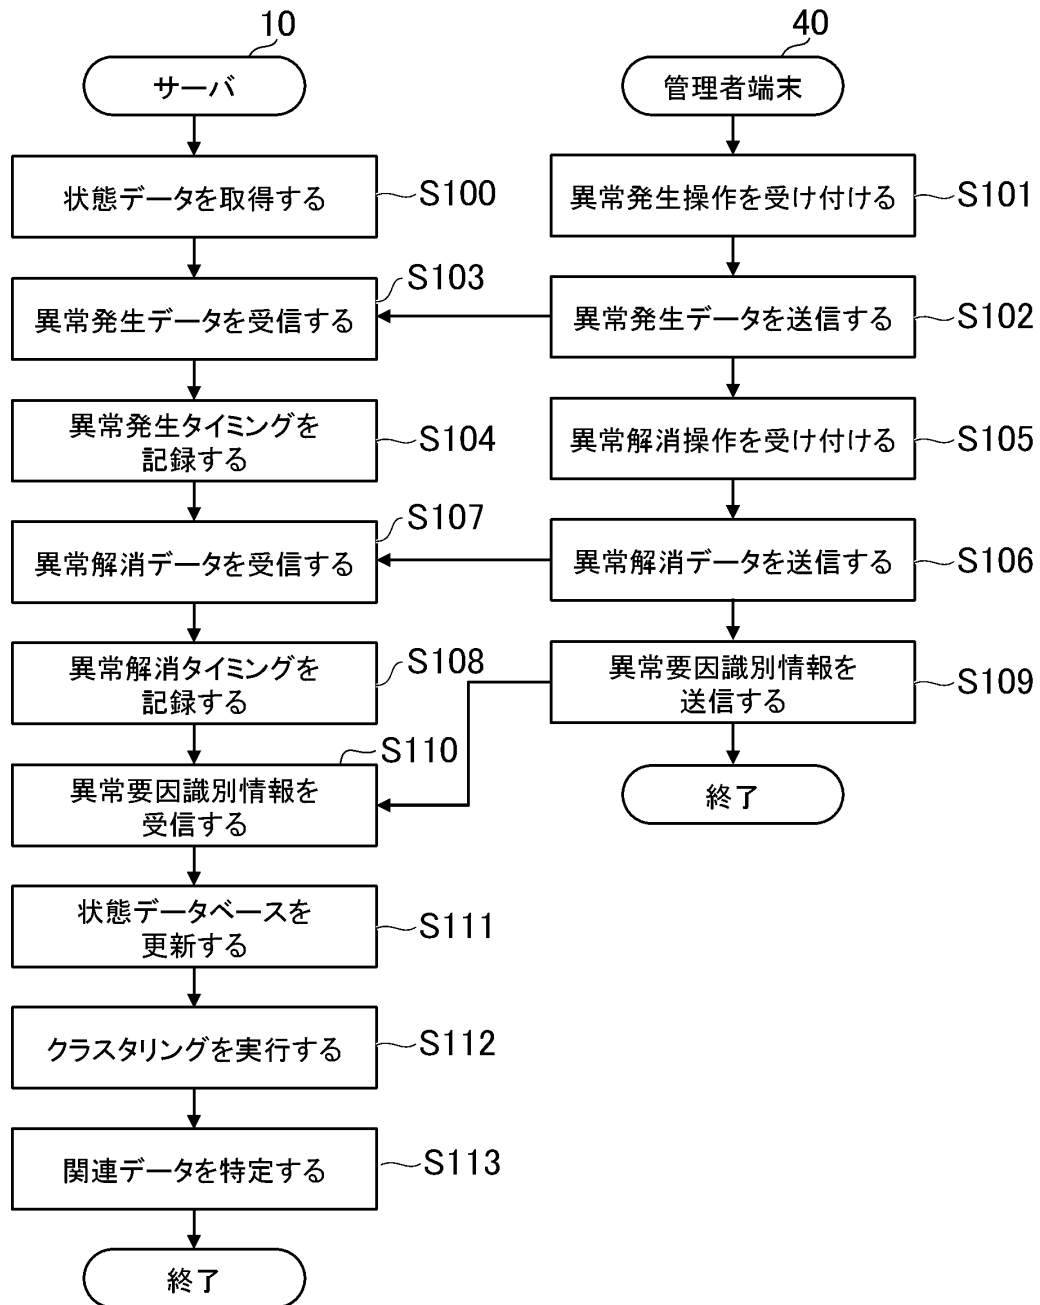

[図16]

