



- (51) International Patent Classification:
F16L 23/04 (2006.01)
- (21) International Application Number:
PCT/EP2013/055545
- (22) International Filing Date:
18 March 2013 (18.03.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
20120332 20 March 2012 (20.03.2012) NO
- (71) Applicant: FMC KONGSBERG SUBSEA AS [NO/NO];
P.o. Box 1012, N-3601 Kongsberg (NO).
- (72) Inventors: BEKKEVOLD, Knut, Håvard; Hulbakkroken
11, N-3090 Hof (NO). MULLINS, Chance, Ray; Kon-
gensgate 1, Leil. 26A, N-3611 Kongsberg (NO).
- (74) Agent: ONSAGERS AS; P.o. Box 1813, N-0123 Oslo
(NO).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: DOUBLE METAL TO METAL KX SEAL

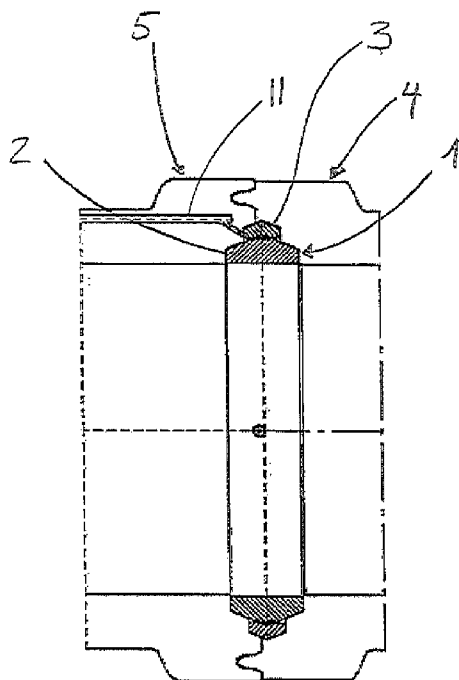


Fig. 1C

(57) Abstract: A seal assembly (1) for a piping connection comprising: a first part (2) having at least one projecting rib (18) extending at least partially along an outer circumference thereof, and a second part (3) arranged to be attached to the first part, the second part being provided with at least one recess (16) on an inner surface thereof, which recess (16) is adapted to receive the projecting rib (18) when the first (2) and second (3) parts are connected, and the recess (16) has a larger cross-section area than the cross-section area occupied by the projecting rib (18) within the recess (16), such that when the first (2) and second (3) parts are connected, they are free to move relative to each other in at least one direction.



Published:

- *without international search report and to be republished
upon receipt of that report (Rule 48.2(g))*