



- (51) **International Patent Classification:**
A47C 3/12 (2006.01) *A47C 4/02* (2006.01)
- (21) **International Application Number:**
PCT/IB2011/051260
- (22) **International Filing Date:**
24 March 2011 (24.03.2011)
- (25) **Filing Language:** Italian
- (26) **Publication Language:** English
- (30) **Priority Data:**
PD2010A000116 9 April 2010 (09.04.2010) IT
- (71) **Applicant** (for all designated States except US): **ARPER S.P.A.** [IT/IT]; Viale Lombardia, 16, I-31050 Monastier di Treviso, TREVISO (IT).
- (72) **Inventor; and**
- (75) **Inventor/Applicant** (for US only): **GORZA, Roberto** [IT/IT]; Viale C. Rizzarda, 15, I-32032 Feltre, BELLUNO (IT).
- (74) **Agents:** **ZANETTIN, Gianluigi** et al.; c/o Jacobacci & Partners S.p.A., Via Berchet, 9, I-35131 Padova (IT).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,

CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- of inventorship (Rule 4.17(iv))

Published:

- with international search report (Art. 21(3))

(54) **Title:** SEAT ELEMENT

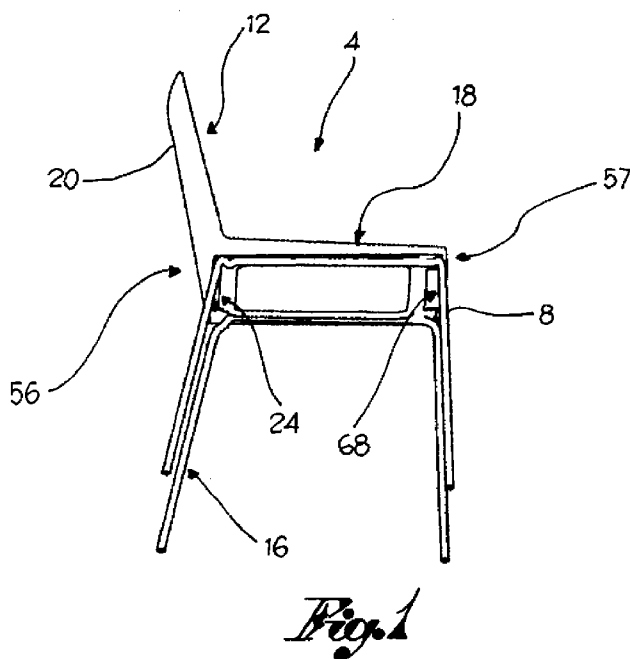

(57) **Abstract:** Seat element (4), comprising a frame (8), a seat (12) associable to said frame (8), the frame (8) and the seat (12) being made separately from each other and being attachable and detachable from each other by the interposition of first coupling means (24). Advantageously, the first coupling means (24) comprise at least one elastic hook (28) and a protuberance (32), able to form a snap coupling with each other, the elastic hook (28) being positioned so as to intercept the protuberance (32) in a vertical assembly direction (Y-Y). The elastic hook (28) has a coupling end (36) and a hook end (40), flexible in relation to the coupling end (36), so as to snap hook onto an undercut (44) of the protuberance (32) in the vertical assembly direction (Y-Y).