

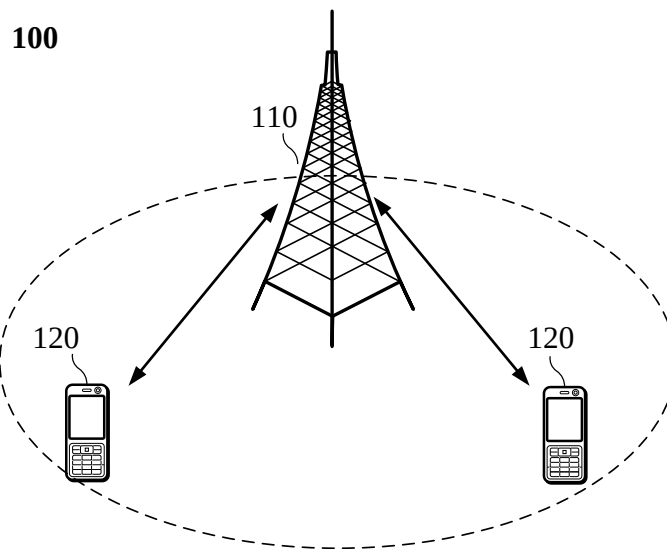


FIG. 1

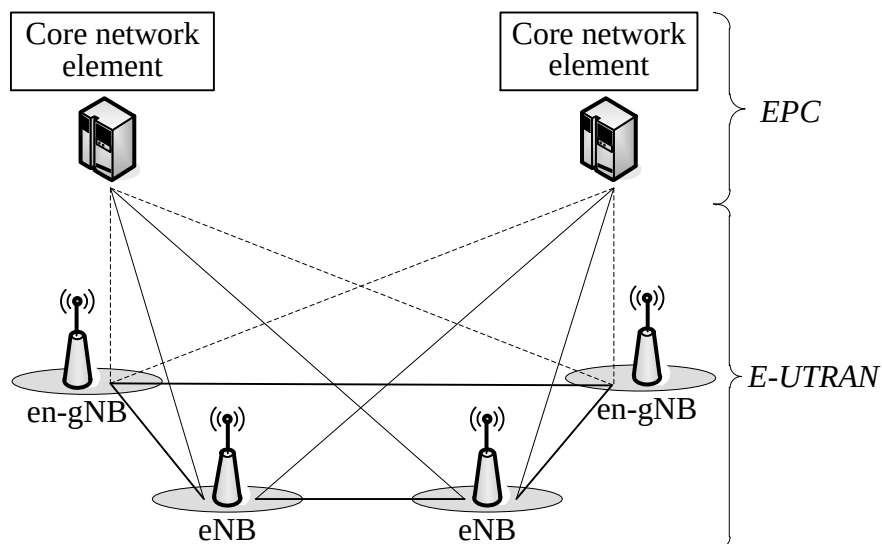


FIG. 2

A first node receives a first request message from a second node, the first request message carrying first indication information, and the first indication information being used for determining, by the first node, whether to configure a default bearer, where the first node and the second node are a secondary node and a master node in a dual connectivity network respectively

301

FIG. 3

A second node sends a first request message to a first node, the first request message carrying first indication information, and the first indication information being used for determining, by the first node, whether to configure a default bearer, where the first node and the second node are a secondary node and a master node in a dual connectivity network respectively

401

FIG. 4

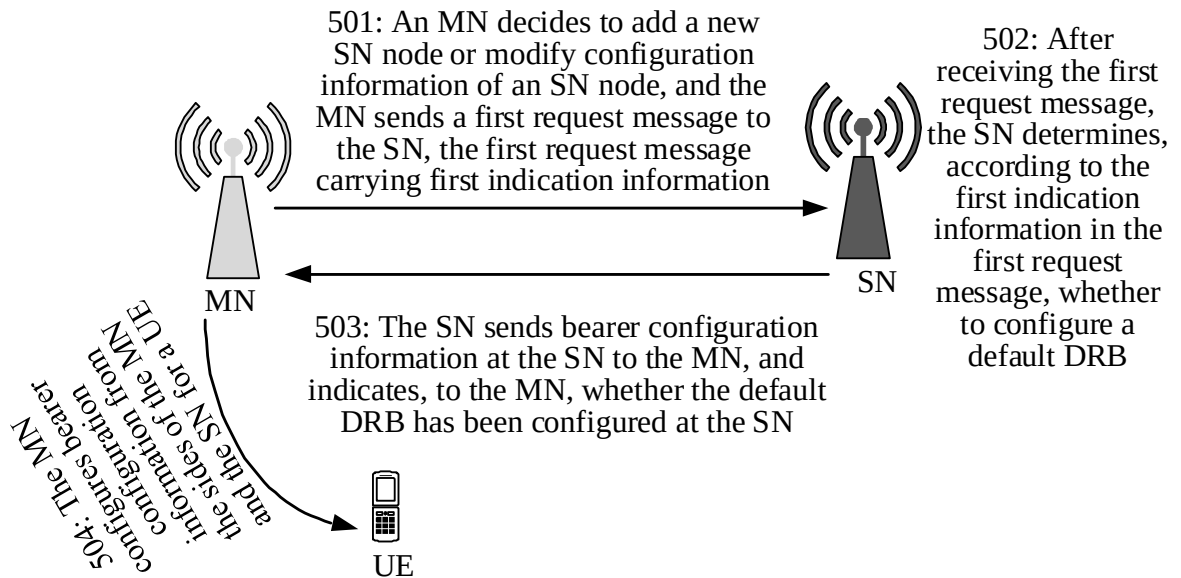


FIG. 5

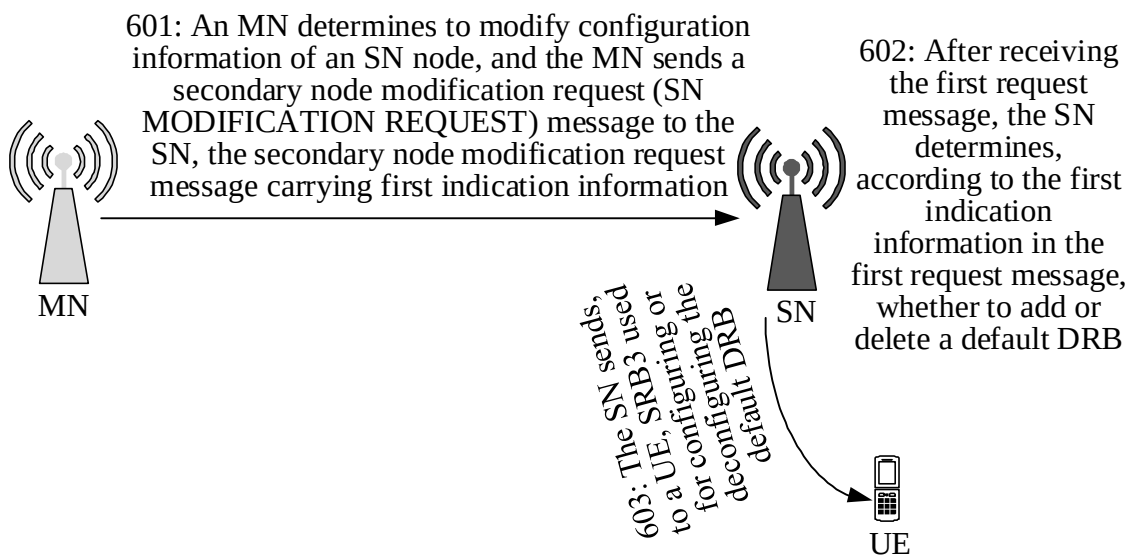


FIG. 6

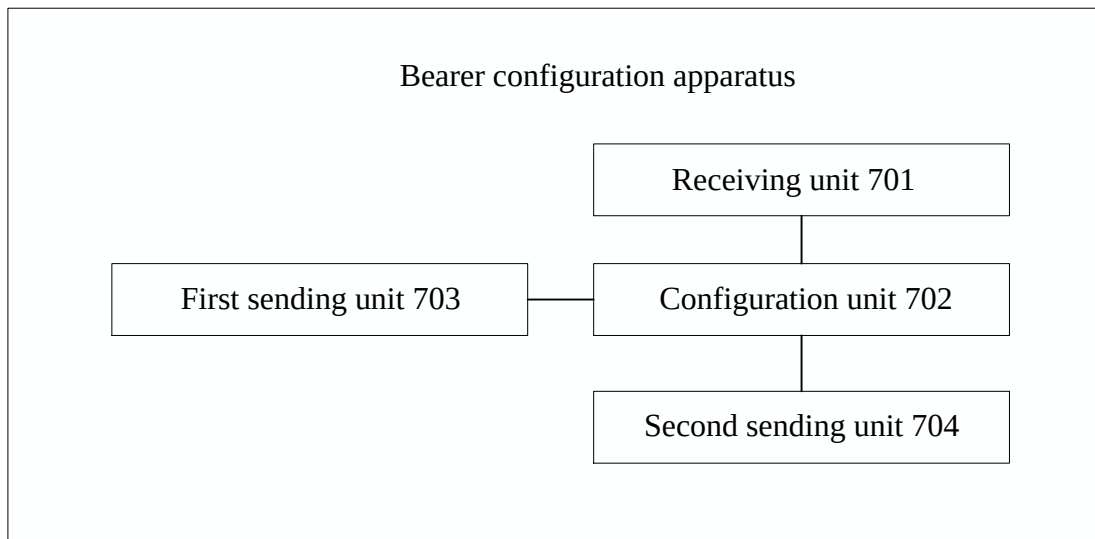


FIG. 7

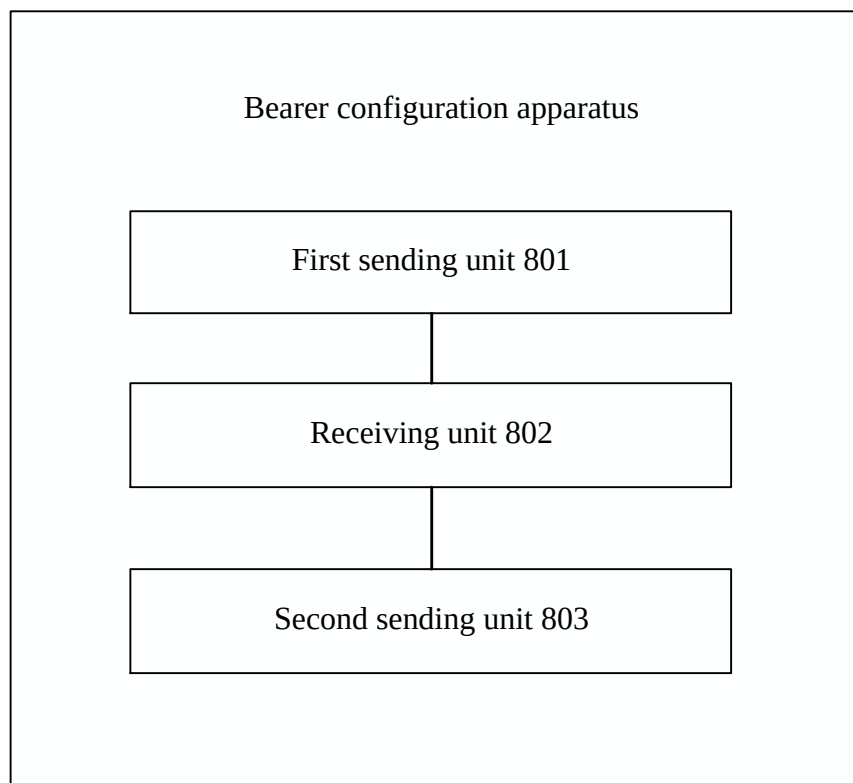


FIG. 8

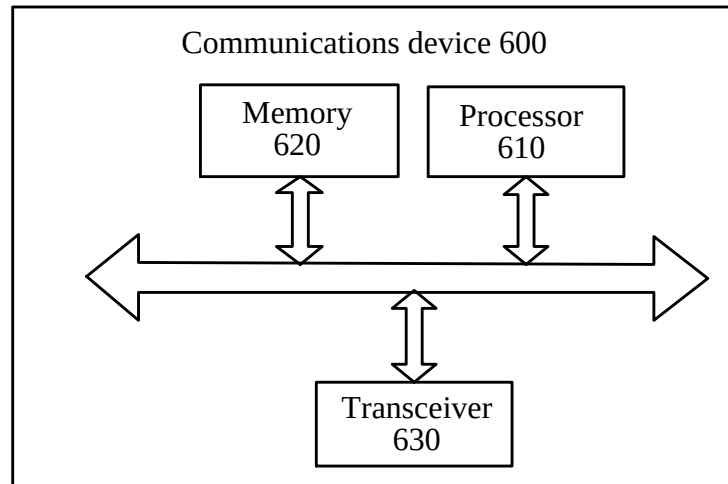


FIG. 9

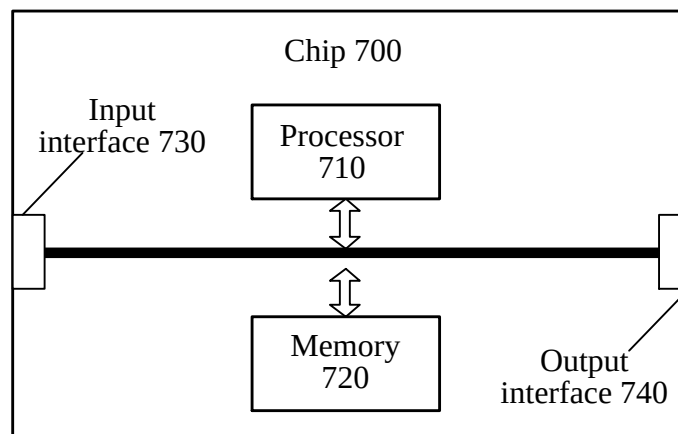


FIG. 10

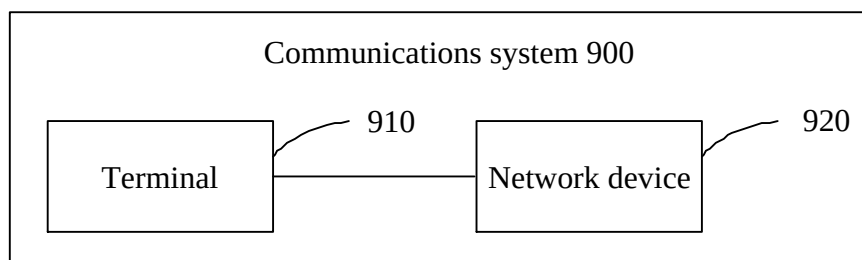


FIG. 11