

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



G00002

(43) International Publication Date
6 September 2002 (06.09.2002)

PCT

(10) International Publication Number
WO 02/068854 A1

(51) International Patent Classification⁷: **F16L 25/00**, 35/00

(21) International Application Number: PCT/US02/01380

(22) International Filing Date: 18 January 2002 (18.01.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/262,809 20 January 2001 (20.01.2001) US

(71) Applicant: OTTEN, Gregory, K. [US/US]; 8607 Prelude Court, Houston, TX 77040 (US).

(71) Applicant and
(72) Inventor: GRIFFIN, Richard, C. [US/US]; 6423 Laurel Run, Houston, TX 77084 (US).

(74) Agent: TORRES, Carlos, A.; Suite 1800, 5718 Westheimer, Houston, TX 77057 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:


- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.



162162

(54) Title: REPLACEABLE CORROSION SEAL FOR THREADED CONNECTIONS

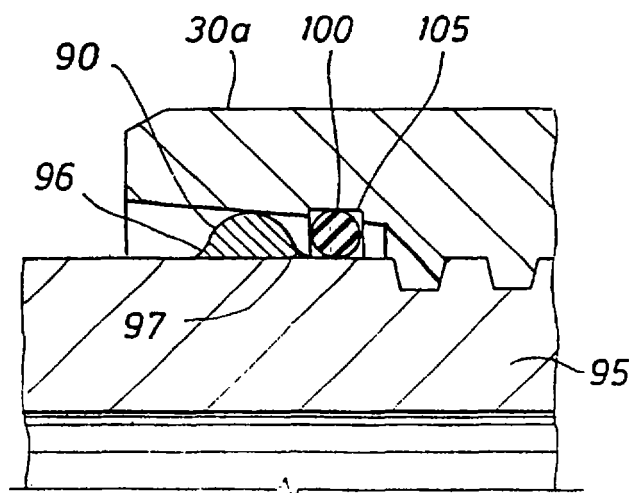

(57) Abstract: The threaded connection (10) between the pin (50) and the box (30) ends of two pipes (15,20) is sealed externally and internally to protect the threads (40,55) in the connection from exposure to corrosive fluids. Seals (60,65) are provided at each axial end of the threads. External seals are formed by metal-to-metal engagement between the pin and box and a third metal body secured circumferentially about the pin. The metal body (90) may be fashioned into a desired annular pin seal surface to mate with and seal with the box at full makeup of the connection. The metal body can be removed and replaced as required to repair or reconstructed the pin seal surface.

WO 02/068854 A1