



(51) International Patent Classification:
H02G 3/18 (2006.01)

(21) International Application Number:
PCT/US2010/039173

(22) International Filing Date:
18 June 2010 (18.06.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/235,897 21 August 2009 (21.08.2009) US
12/705,280 12 February 2010 (12.02.2010) US

(71) Applicant (for all designated States except US): **UPSITE TECHNOLOGIES, INC.** [US/US]; 8100 Lang Avenue N.E., Suite 301, Albuquerque, NM 87109-4305 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SEMLINER, Arthur, T.** [US/US]; 37-04 Van Nostrand Place, Douglaston, NY 11363 (US). **PETTINGILL, Jonathan** [US/US]; 129 Carlton Avenue, Brooklyn, NY 11205 (US).

(74) Agent: **SCHWEITZER, Fritz, L.**; St. Onge Steward Johnston & Reens LLC, 986 Bedford Street, Stamford, CT 06905-5619 (US).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: SEALING GROMMET

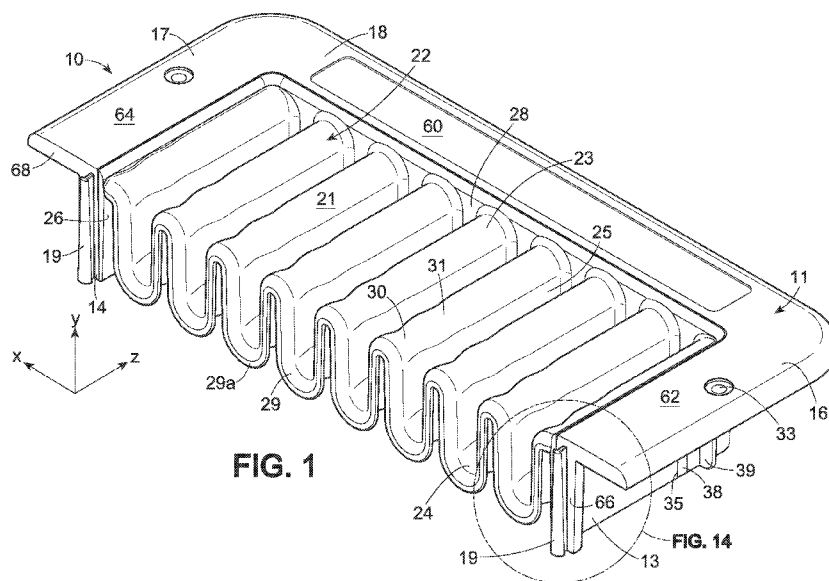

(57) Abstract: A sealing grommet, particularly for data centers and the like, formed of one or a pair of U-shaped frame sections, each co-molded with a thermoplastic elastomeric seal of corrugated wave form, with corrugated edges of the seals exposed at the open sides of the U-shaped frames. A pair of such grommet sections joined together, with the corrugated edges arranged to be in contact and in phase, provides a uniquely efficient seal to hold back air under pressure while allowing various pass-through elements, such as cables, hoses, etc., to be extended through the grommet and while enabling the pass-through elements to be easily added, removed, or re-arranged as may be necessary to accommodate the dynamic changes experienced in the operation of a data center.