



(51) International Patent Classification:
F16K 47/08 (2006.01)

(21) International Application Number:

PCT/IB2009/051611

(22) International Filing Date:

18 April 2009 (18.04.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/047,747 24 April 2008 (24.04.2008) US

(71) Applicant (for all designated States except US):
CAMERON INTERNATIONAL CORPORATION
[US/US]; 1333 W Loop N Suite 1700, Houston, Texas
77027 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ELLIOTT, Declan**
[IE/IE]; Lamagh, Newton Forbes, County Longford (IE).
GRACE, Andrew [IE/IE]; 1 Lisin, Tullyglass, Shannon,
County Clare (IE). **MCHUGH, Edmund** [IE/IE];

Ardeen, Ballymakeegan, Longford Town, County Long-
ford (IE). **O'DONNELL, Martin** [IE/IE]; Bavin, Kilcar,
County Donegal (IE).

(74) Agent: **SWANSON, Tait R.**; 7915 FM 1960 West, Suite
330, Houston, TX 77070 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ,
EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO,
NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG,
SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

[Continued on next page]

(54) Title: CONTROL VALVE

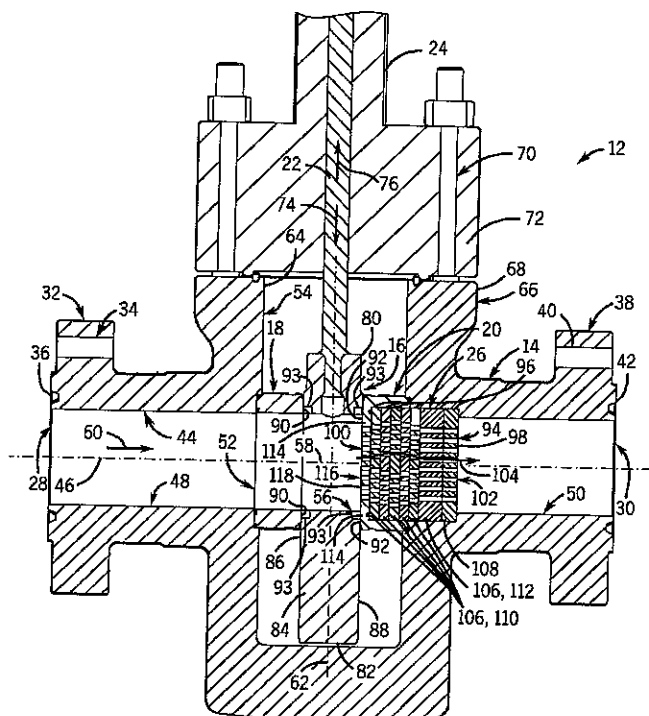


FIG. 2

(57) Abstract: Provided is a valve, including an in-line
flow passage, a shut-off mechanism, and a multi-stage
throttling section disposed in the in-line flow passage.
Further provided is an in-line valve, including a flow con-
trol component and a sealing component, wherein the flow
control component and the sealing component are separate
from one another.



MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR),
OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML,
MR, NE, SN, TD, TG).

Published:**Declarations under Rule 4.17:**

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))