

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
2 October 2008 (02.10.2008)

PCT

(10) International Publication Number
WO 2008/118982 A1

(51) International Patent Classification:
H04B 7/005 (2006.01)

(21) International Application Number:
PCT/US2008/058307

(22) International Filing Date: 26 March 2008 (26.03.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/896,975 26 March 2007 (26.03.2007) US
12/055,264 25 March 2008 (25.03.2008) US

(71) Applicant (for all designated States except US): **QUALCOMM INCORPORATED** [US/US]; Attn: International Ip Administration, 5775 Morehouse Drive, San Diego, California 92121 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SAMPATH, Hemanth** [IN/US]; 5775 Morehouse Drive, San Diego,

California 92121 (US). **TEAGUE, Edward Harrison** [US/US]; 5775 Morehouse Drive, San Diego, California 92121 (US). **GORE, Dhananjay Ashok** [IN/US]; 5775 Morehouse Drive, San Diego, California 92121 (US).


(74) Agent: **SEO, Howard H.**; Attn: International Ip Administration, 5775 Morehouse Drive, San Diego, California 92121 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

[Continued on next page]

(54) Title: DIGITAL AND ANALOG POWER CONTROL FOR AN OFDMA/CDMA ACCESS TERMINAL

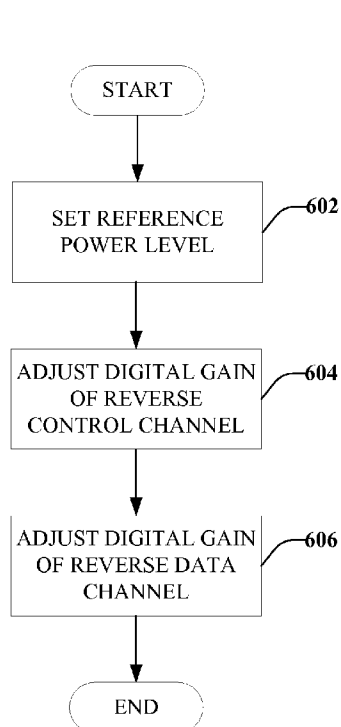

(57) Abstract: Aspects describe controlling a power level for an access terminal in a wireless communication system that utilizes multiple modulation waveforms. The power can be controlled after an Access Grant is received in response to an Access Probe until the mobile device transitions into a steady state. A reference power can be continuously monitored and a setting of a power amplifier can be modified only when the reference power changes. A digital gain of a reverse data channel can be adjusted relative to the reference power level.

FIG. 6



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL,
NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG,
CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *as to the applicant's entitlement to claim the priority of the
earlier application (Rule 4.17(iii))*

Published:

— *with international search report*

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a
patent (Rule 4.17(ii))*