



(51) International Patent Classification:
G01N 35/10 (2006.01)

(21) International Application Number:
PCT/US2012/027580

(22) International Filing Date:
2 March 2012 (02.03.2012)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/449,025 3 March 2011 (03.03.2011) US
61/490,451 26 May 2011 (26.05.2011) US

(71) Applicant (for all designated States except US): **LIFE TECHNOLOGIES CORPORATION** [US/US]; 5791 Van Allen Way, Carlsbad, California 92008 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SMITH, Wesley** [US/US]; 29851 Willow Creek Road, Eugene, Oregon 97402 (US). **DAVIS, Glen** [US/US]; 29851 Willow Creek Road, Eugene, Oregon 97402 (US). **JACKSON, John**

[US/US]; 5791 Van Allen Way, Carlsbad, California 92008 (US). **KADUCHAK, Gregory** [US/US]; 29851 Willow Creek Road, Eugene, Oregon 97402 (US). **WARD, Michael** [US/US]; 29851 Willow Creek Road, Eugene, Oregon 97402 (US).

(74) Agent: **WONG, Denise H.**; 5791 Van Allen Way, Carlsbad, California 92008 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU,

[Continued on next page]

(54) Title: SAMPLING PROBES, SYSTEMS, APPARATUSES, AND METHODS

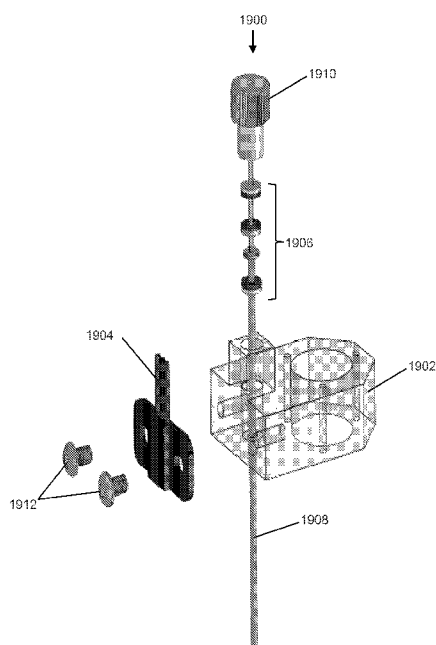


FIG. 19A

(57) Abstract: A sampling system is provided. The sampling system includes a housing. Mounted to the housing is a Hall effect sensor. A probe configured to contact a sample is inserted into the housing. The probe includes an elongated portion and a restorative spring inserted onto the elongated portion of the probe. The restorative spring provides sufficient restorative force to return the probe to a relaxed position. The Hall effect sensor is configured to sense a field strength generated by the proximity of the restorative spring of the probe in the extended position.



TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

(88) Date of publication of the international search report:

14 January 2016

(15) Information about Correction:

Previous Correction:

see Notice of 20 June 2013