

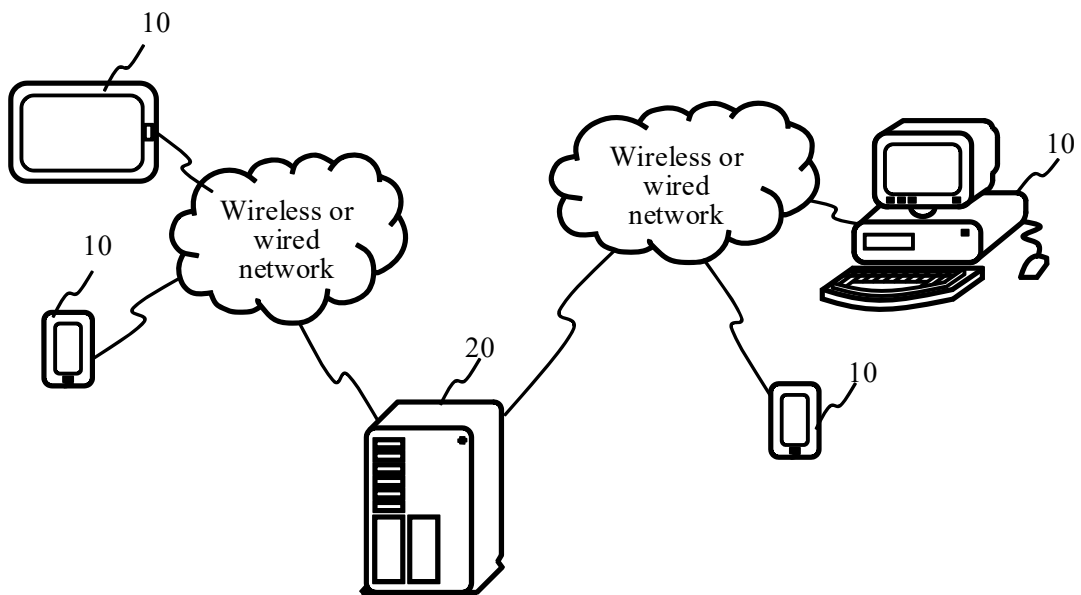


FIG. 1

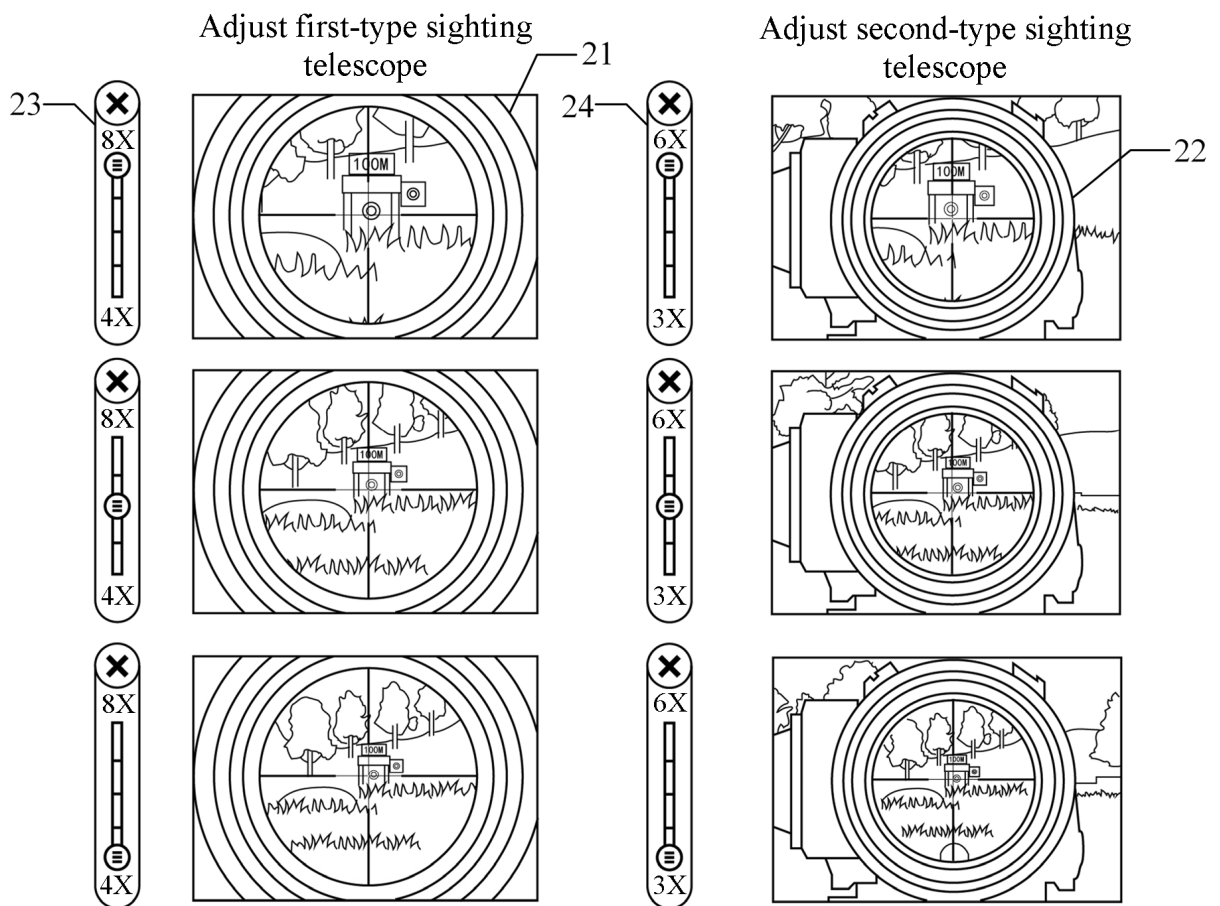


FIG. 2

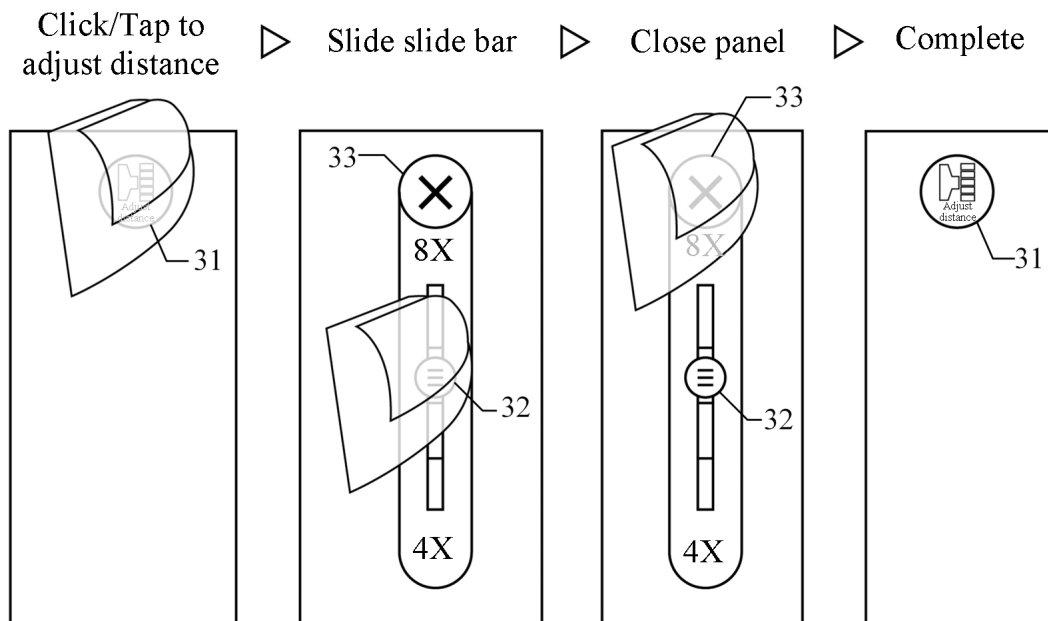


FIG. 3


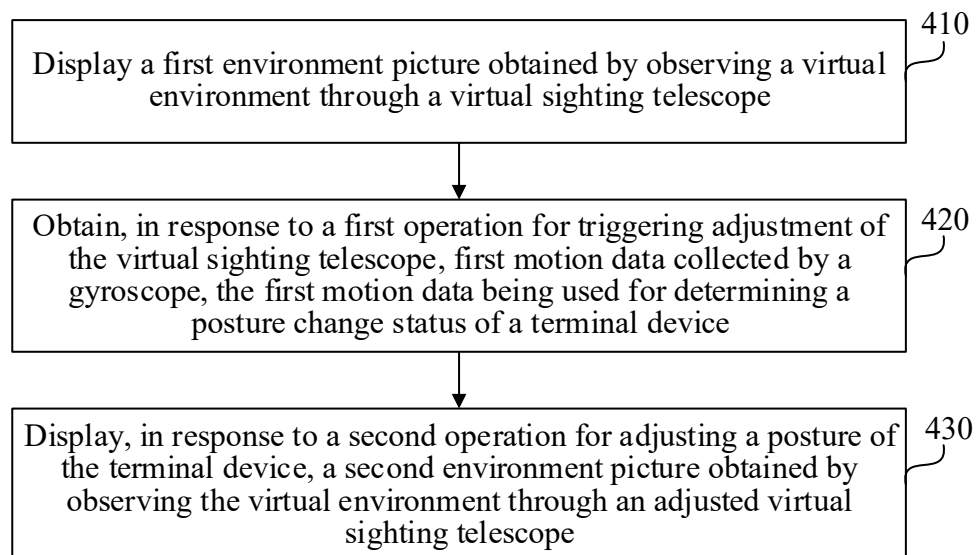


FIG. 4

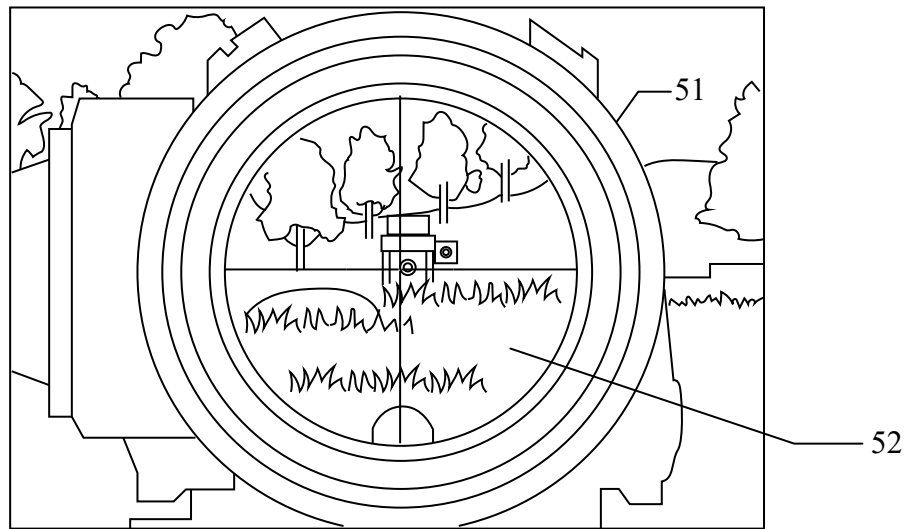

Adjust posture of
terminal device

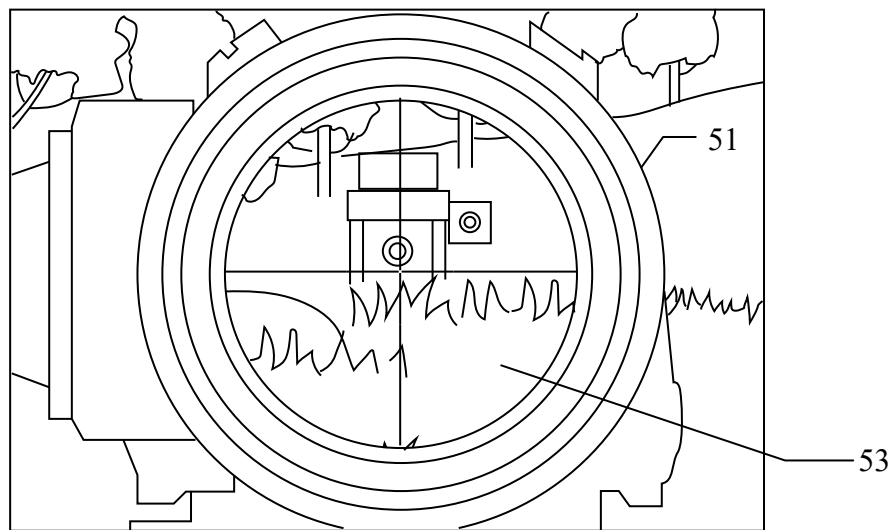


FIG. 5

Gyroscope switching sighting
telescope

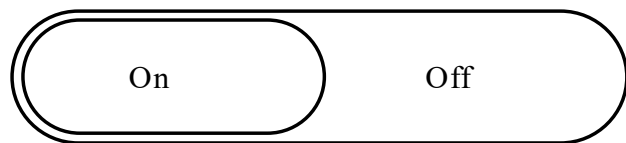


FIG. 6

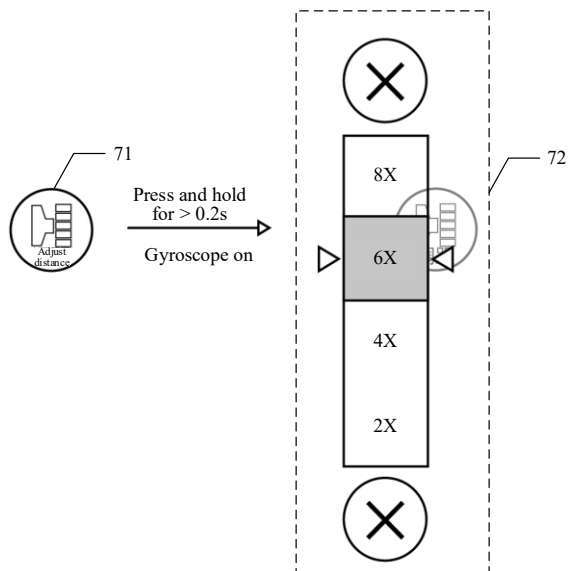


FIG. 7

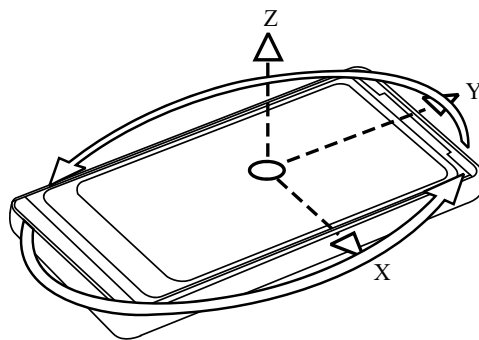


FIG. 8

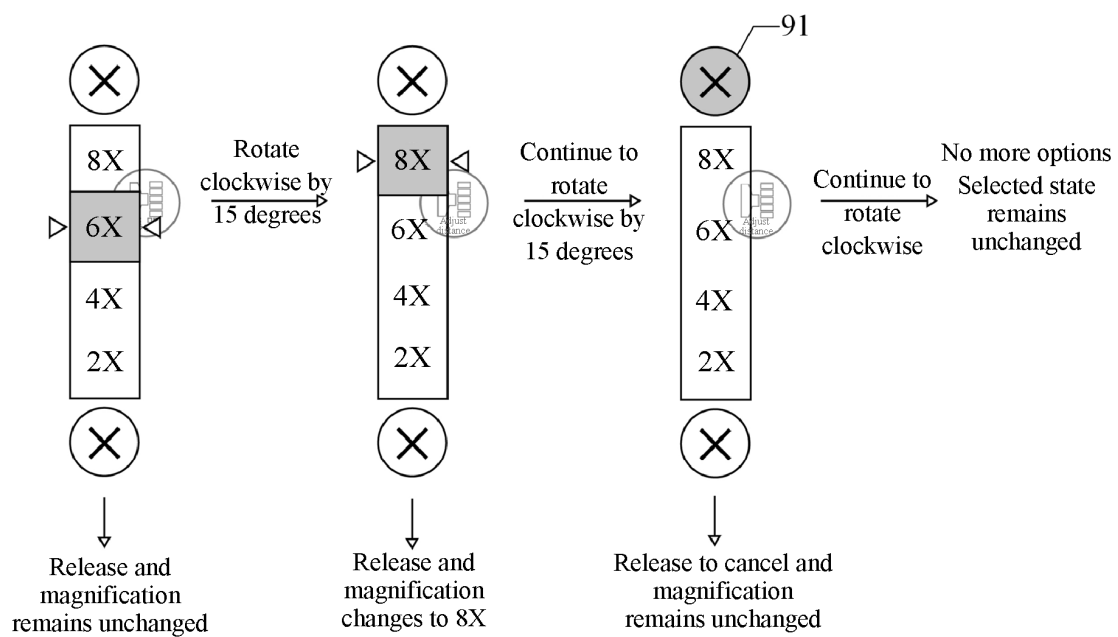


FIG. 9

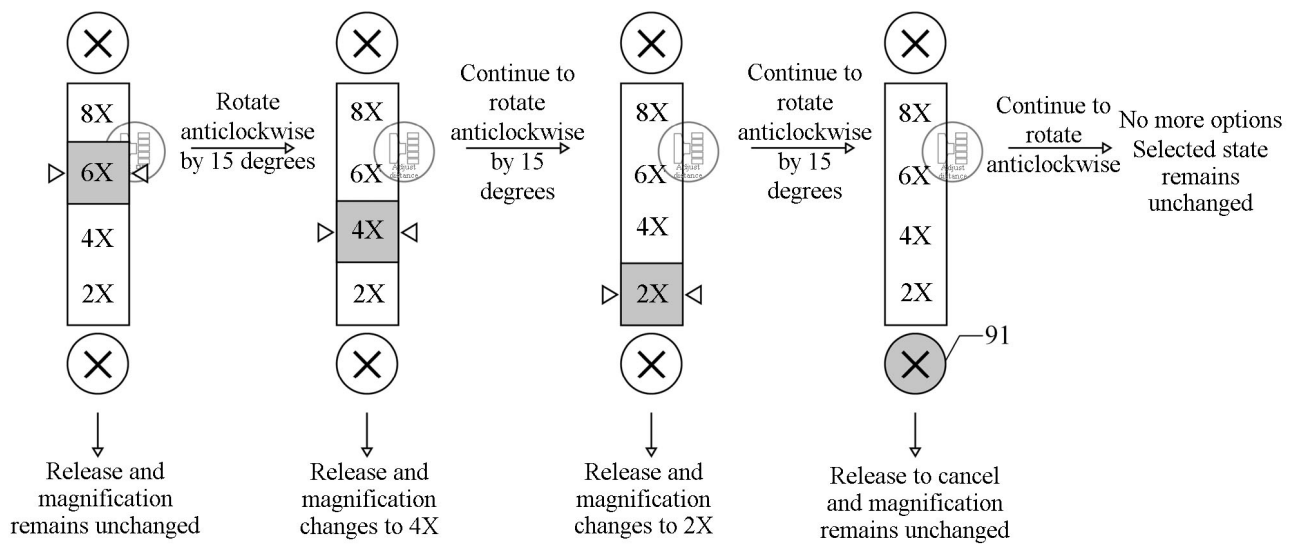


FIG. 10

A first axis is perpendicular to a plane in which a screen of a terminal device is located

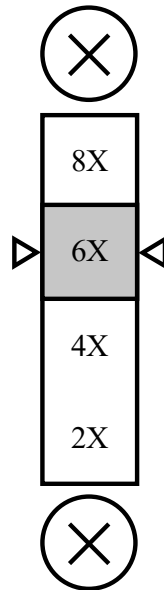


FIG. 11

A first axis is parallel to a plane in which a screen of a terminal device is located, and the first axis is perpendicular to a straight line corresponding to an arrangement direction of a plurality of candidate parameters

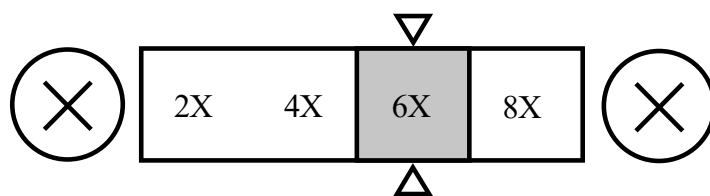


FIG. 12

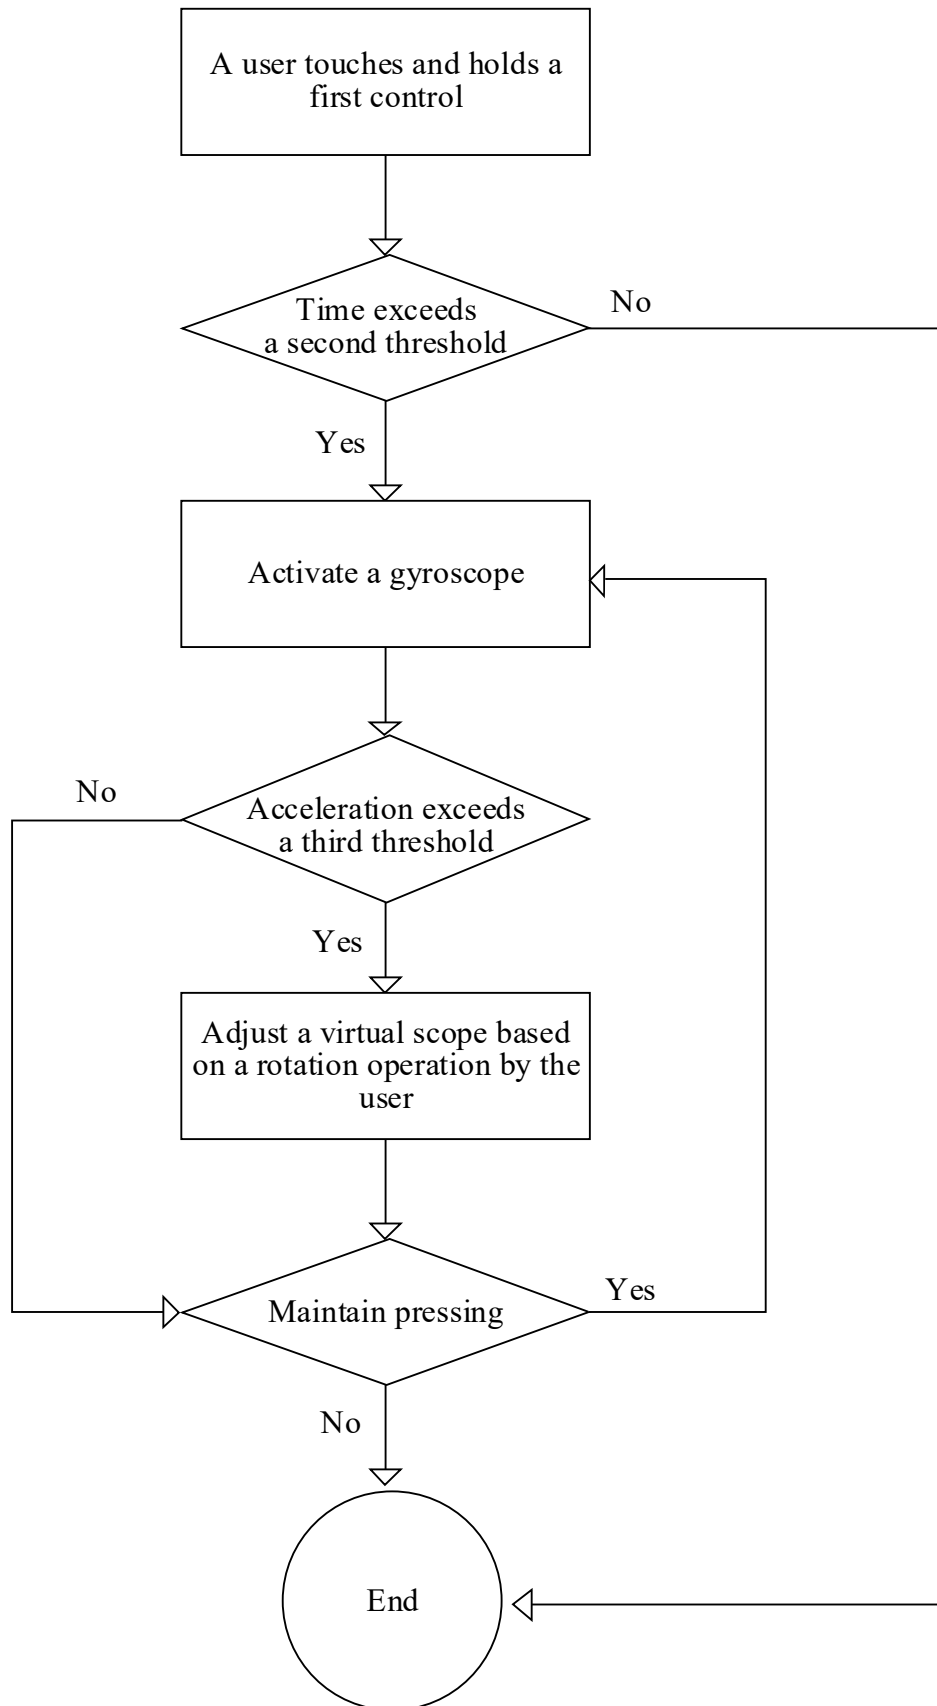


FIG. 13

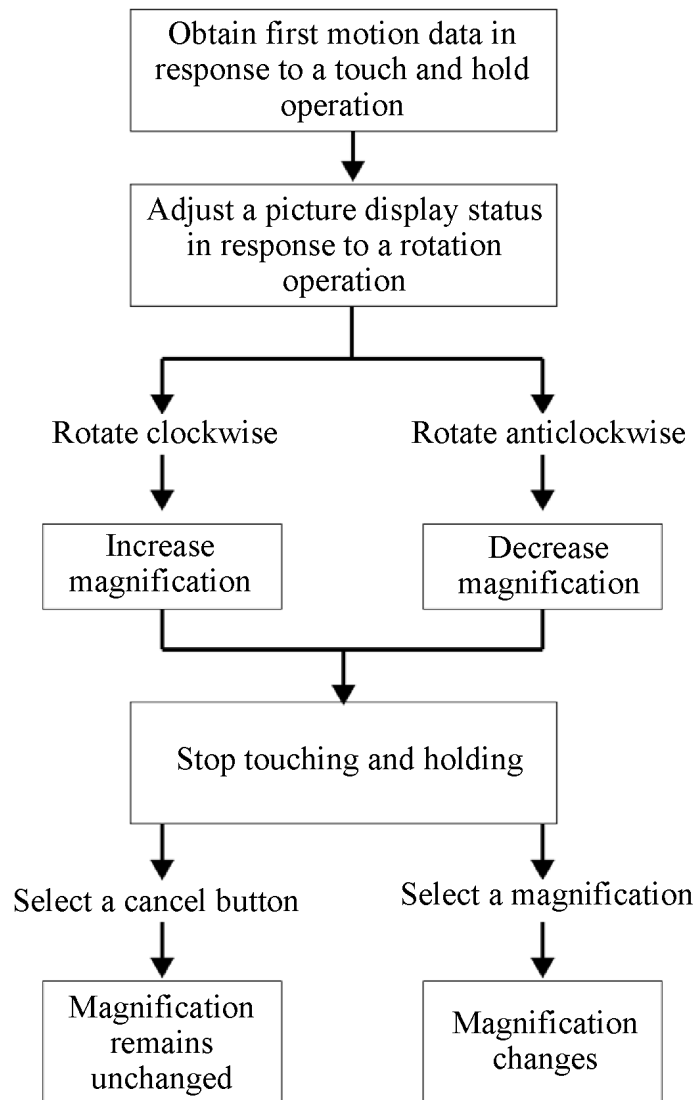


FIG. 14

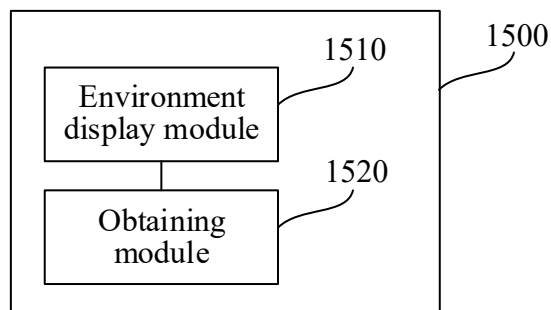


FIG. 15




FIG. 16