

STEEL WIRE ELEMENT FOR MIXING INTO SUBSEQUENTLY HARDENING MATERIALS

5 The invention relates to a steel wire element for mixing into subsequently hardening soft materials, said element consisting of hook-shaped ends and a middle portion the length/diameter ratio of which is between 20 and 100.

10 Such wire elements for reinforcing subsequently hardening materials, such as concrete, are known from the Dutch patent 160,628 and the corresponding U.S.A. patents 3,900,667 and 3,942,955 of the applicant N.V. BEKAERT S.A. and are marketed worldwide by the applicant under the brand name DRAMIX®. The technical characteristics of the DRAMIX steel wire fibers are
15 described in Bekaert specifications AS-20-01 (4 pages) and AS-20-02 (3 pages) of April 1995.

By steel wire fibers or elements with hook-shaped ends is to be understood, on the one hand, steel wire fibers with L-shaped or bent ends, such as described, for example, in Dutch
20 patent 160,628, and, on the other hand, steel wire fibers with Z-shaped ends, such as described in Bekaert specifications AS-20-01 and AS-20-02. In what follows, steel wire fibers with L-shaped and Z-shaped ends are described in
25 greater detail in the sections specifically dealing with the figures.

An important aim of adding steel wire fibers to concrete is to improve the bending strength of the steel fiber reinforced
30 concrete. The determination of the bending tensile strength, the bending strength and the equivalent bending tensile strength of steel fiber reinforced concrete is described in Dutch Recommendation 35 of the Civil-Technical Center for the Implementation of Research and Regulations (in brief, CUR35)
35 and in the Belgian standards NBN B15-238 and NBN B15-239.

With the addition of steel wire fibers to concrete, it has been found that the bending strength and the equivalent bending tensile strength increase considerably with increasing amounts of steel wire fibers.

5

One disadvantage of this, however, is that the cost price of the steel fiber reinforced concrete thus obtained increases with the increasing amounts of steel wire fibers. It is for this and other reasons that many new types of steel wire
10 fibers have been developed with a great variety of different possible embodiments in which the aim has always been to obtain an equal improvement of the technical characteristics of the steel fiber reinforced concrete with the addition of smaller amounts of steel wire fiber to the concrete.

15

One important group of steel wire fibers that gives rise to a considerable improvement of the technical characteristics of the steel fiber reinforced concrete thus obtained is the group of steel wire fibers having hook-shaped ends, such as
20 already mentioned above.

It is an object of the invention to provide a new type of steel wire element in which the technical characteristics of the steel fiber reinforced concrete thus obtained are even
25 further improved, or in which it is possible to lower the cost price of the steel fiber reinforced concrete thus obtained due to the fact that the desired technical characteristics of the steel fiber reinforced concrete can be obtained with the addition of smaller amounts of steel wire
30 elements to the concrete.

For this purpose, the invention proposes a steel wire element of the type mentioned in the introduction in which the middle portion of the steel wire element displays a substantially
35 circular cross-section over essentially its entire length and

in which the hook-shaped ends of the steel wire element are deformed by flattening.

5 It should be noted that the idea of flattening the steel wire fibers over their entire length is already known from Japanese patent 6-294017 (deposited for examination on 21 October 1994). From German patent G9207598 the idea is also already known of flattening only the middle portion of a steel wire fiber with hook-shaped ends. Furthermore, from U.S.A. patent 10 4,233,364 the idea is already known of using straight steel wire fibers without L or Z hook-shaped ends: the ends of these fibers are flattened and provided with a flange in a plane essentially perpendicular to the flattened ends.

15 The invention will be explained in further detail in the following description on the basis of the accompanying drawing.

In the drawing:

20 Fig. 1 shows in perspective a first embodiment of a steel wire element according to the invention, in which the Z-shaped ends are flattened in a plane which is parallel with the plane of the wire element.

25 Fig. 2 shows in perspective a second embodiment of a steel wire element according to the invention, in which the Z-shaped ends are flattened in a plane perpendicular to the plane of the wire element.

30 Figures 3a and 3b show in perspective two variants of a third embodiment of a steel wire element according to the invention, in which the Z-shaped ends are flattened in a plane perpendicular to the plane of the wire element, but with a degree of flattening that varies over the length of the flattened ends.

35 Figures 4 through 7 are longitudinal cross-sections of four different embodiments of steel wire elements with L-shaped ends.

Figure 1 shows a first embodiment of a steel wire element or fiber 1 according to the invention. The fiber 1 consists of a middle portion 2 and Z-shaped ends 3. The Z-shaped ends 3 are obtained by bending, or crimping, the original ends of length l at an angle α to a crimping depth of h . The fiber 1 consists preferably of drawn steel wire, and the diameter of the fiber 1 can vary from 0.2 mm to 1.5 mm, depending on the use to which the steel wire fiber is being put. The length of the middle portion 2 is preferably equal to between 20 and 100 times the diameter of the fiber.

According to the invention, the middle portion 2 of the fiber 1 shows a substantially circular cross-section over essentially its entire length and the hook-shaped ends 3 of the fiber 1 are deformed by flattening. With the embodiment shown in Figure 1, the Z-shaped ends 3 are flattened in the plane of the drawing or in a plane which is parallel with the plane of the wire element.

The cross-section of the flattened ends 3 can be substantially rectangular or ovular in shape. Hence the ends 3 of a wire element 1 having a substantially circular cross-section with a diameter of 1.05 mm can be flattened to a rectangular cross-section with a breadth of roughly 0.65 mm and a height of 1.33 mm. By degree of flattening is meant here the ratio of the original diameter to the breadth of the rectangular cross-section or the small axis of the oval-shaped cross-section. In the aforementioned example, the degree of flattening is $1.05 : 0.65 = 1.62$. It has been determined that the degree of flattening is preferably greater than 1.10 and less than 3.50. With too low a degree of flattening, the enhancement of the bending strength of the steel fiber reinforced concrete is less great; this is also the case with too high a degree of flattening and, moreover, great deforming forces are needed to obtain the desired degree of flattening. In the embodiment of the wire element 1 shown in Figure 1, the

degree of flattening of the flattened ends 3 is essentially constant over their entire length.

5 Figure 2 shows a second embodiment of a steel wire element 1 according to the invention. The difference between the embodiment shown in Figure 1 and the embodiment shown in Figure 2 consists in the fact that in the second instance the Z-shaped ends 3 are flattened in a plane perpendicular to the plane of the wire element 1.

10 Figure 3a shows a first variant of a third embodiment of a steel wire element 1 according to the invention, in which the Z-shaped ends 3, just as in Figure 2, are flattened in a plane perpendicular to the plane of the wire element 1, but in which the degree of flattening of the flattened ends 3 varies over their length.

20 Figure 3b shows a second variant of the third embodiment, in which the degree of flattening of the flattened ends 3 varies over their length. The degree of flattening is smaller at the bending points or bends of the Z-shaped ends 3 than in the immediately adjacent portions of the bends.

25 Figures 4 through 7 show longitudinal cross-sections of four different embodiments of steel wire elements 1 with L-shaped ends 3.

30 Figure 4 shows a fourth embodiment of a steel wire element 1 according to the invention. The difference between the embodiment shown in Figure 1 and the embodiment shown in Figure 4 consists in the fact that the Z-shaped ends 3 are now replaced by L-shaped ends 3, in which the L-shaped ends 3 are bent in opposite directions.

35 Figures 5, 6 and 7 show further embodiments of steel wire elements 1 with flattened L-shaped ends 3, in which, however,

6

the flattened L-shaped ends 3 are provided with additional end structures to further increase the bonding in the concrete. It is clear that numerous other variants are also possible within the scope of the invention.

5

The invention will now be further explained on the basis of the tests that have been carried out on four different types of steel wire fibers 1 with Z-shaped ends. The four types are : basic type B or steel wire fiber with Z-shaped ends (non-flattened) according to the prior state of the art ; type T1 : steel wire fiber according to Fig. 1 ; type T2 : steel wire fiber according to Fig. 2 ; type T3 : steel wire fiber according to Fig. 3b.

10

15

The most important mechanical properties of the four types of fibers are shown in Table 1 :

20

	dia- meter	length L	tensile strength	α	l	h
	(mm)	(mm)	(Newton/mm ²)	degrees	(mm)	(mm)
B	1.05	49	1180	40 - 50	2.1	2.0
T1	1.05	51	1100	40 - 50	2.1	2.3
T2	1.05	51	1100	40 - 50	2.5	2.0
T3	1.05	51	1100	50 - 60	2.4	2.1

TABLE 1

25

30

- the values reported here are the average values of 10 measurements.
- length L is the total length of the fiber (in mm).
- diameter d: the nominal wire diameter in mm.
- tensile strength of the straight middle portion in N/mm².
- α : the angle at which the wire element 1 is bent.

7

- l: the length in mm of the bent ends.
 - h: the crimping depth in mm.
 - the degree of flattening of types T1 and T2 is approximately 1.62 and is constant over the entire length ; the
- 5 degree of flattening of type T3 is also 1.62 on average, though it varies over the length.

10 Concrete test beams (length $L = 500$ mm, height $H = 150$ mm, breadth $B = 150$ mm) were formed with fiber amounts of 20, 30, 40 and 50 kg/m^3 for each type of fiber and then subjected to a four-point stress test as described in CUR 35 or the NBN B15-238 and NBN B15-239 standards.

15 The testing conditions for the test beams are : test basis $L = 450$ mm and $l = 150$ mm. The equivalent bending tensile strength f_{e300} (with deflection $j = 1.5$ mm) (in N/mm^2) is given below in Table 2, in which n indicates the number of test beams per type and amount. The increase of the equivalent bending tensile strength f_{e300} ($j = 1.5$ mm) for types

20 T1, T2 and T3 in relation to the basic type B is given in each case as a % (in parentheses).

Fibers (kg/mm ³)	B	T1	T2	T3
20	2.2 (n = 6)	2.3 (+5%) (n = 6)	2.6 (+18) (n = 6)	2.6 (+18) (n = 6)
30	2.9 (n = 5)	2.9 (0) (n = 6)	3.3 (+14) (n = 6)	3.6 (24) (n = 5)
40	3.2 (n = 6)	3.6 (13) (n = 6)	3.9 (22) (n = 6)	4.2 (31) (n = 6)
50	3.8 (n = 6)	4.0 (5) (n = 6)	4.4 (16) (n = 6)	5.0 (32) (n = 6)

TABLE 2

The test results in Table 2 clearly indicate that the equivalent bending tensile strength f_{e300} ($j = 1.5$ mm) increases considerably with steel wire elements (types T1, T2 and T3) according to the invention. This means that to obtain a particular equivalent bending tensile strength in a steel fiber reinforced concrete construction - as, for example, a concrete floor - it will suffice to add a smaller amount of steel fibers according to the invention to the concrete.

It can further be concluded from the test results that the type T2 steel wire fibers produce better results than the type T1 fibers, and that the type T3 fibers produce still better results than the type T2 fibers.







THIS SHEET HAS BEEN
REPLACED





CLAIMS

- 5 1. Steel wire element (1) for mixing into subsequently
hardening soft materials, said element consisting of hook-
shaped ends (3) and a middle portion (2) the length/diameter
ratio of which is between 20 and 100, with the characteristic
that the middle portion (2) of the element (1) displays a
substantially circular cross-section over essentially its
10 entire length and that the hook-shaped ends (3) of the
element (1) are deformed by flattening.
- 15 2. Steel wire element according to claim 1, with the
characteristic that the hook-shaped ends (3) of the wire
element (1) are flattened in a plane which is parallel with
the plane of the wire element (1).
- 20 3. Steel wire element according to claim 1, with the
characteristic that the hook-shaped ends (3) of the wire
element (1) are flattened in a plane which is perpendicular
to the plane of the wire element (1).
- 25 4. Steel wire element according to one or more of the
foregoing claims 1 - 3, with the characteristic that the
degree of flattening of the flattened ends (3) is substan-
tially constant over their length.
- 30 5. Steel wire element according to one or more of the
foregoing claims 1 - 3, with the characteristic that the
degree of flattening of the flattened ends (3) is variable
over their length.

This Sheet Has Been Replaced



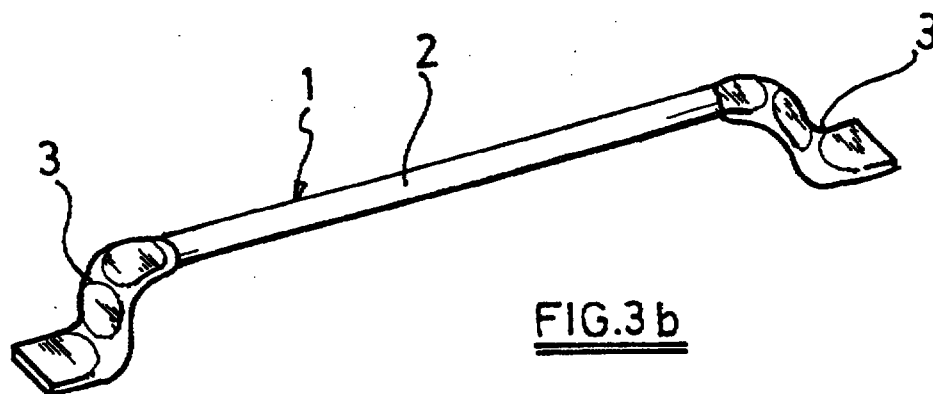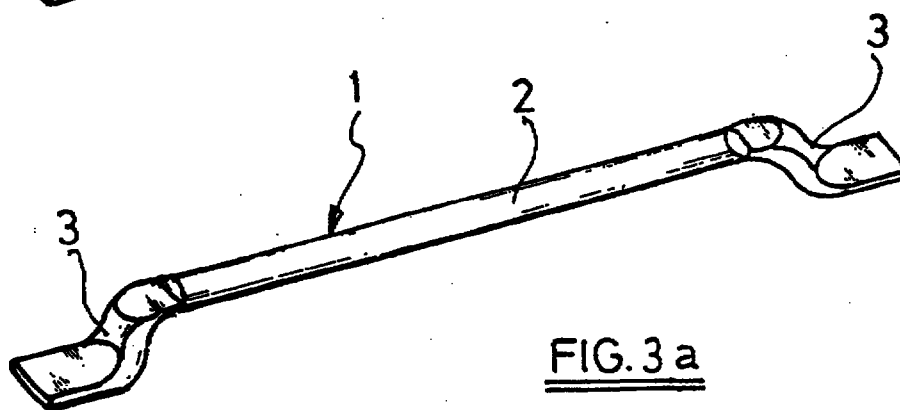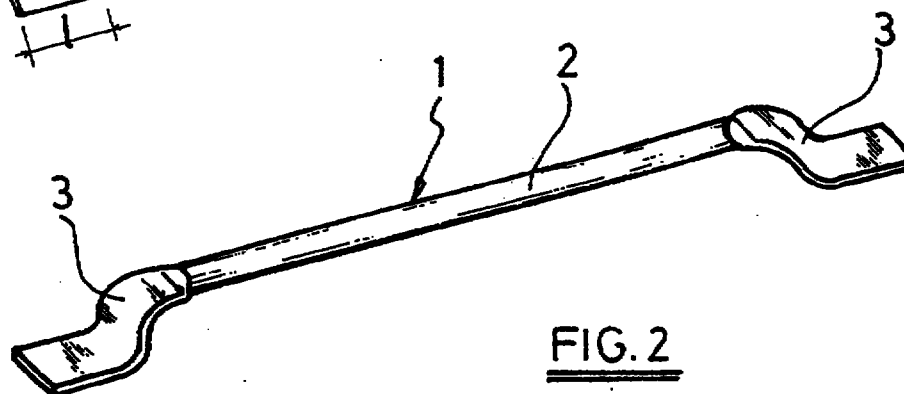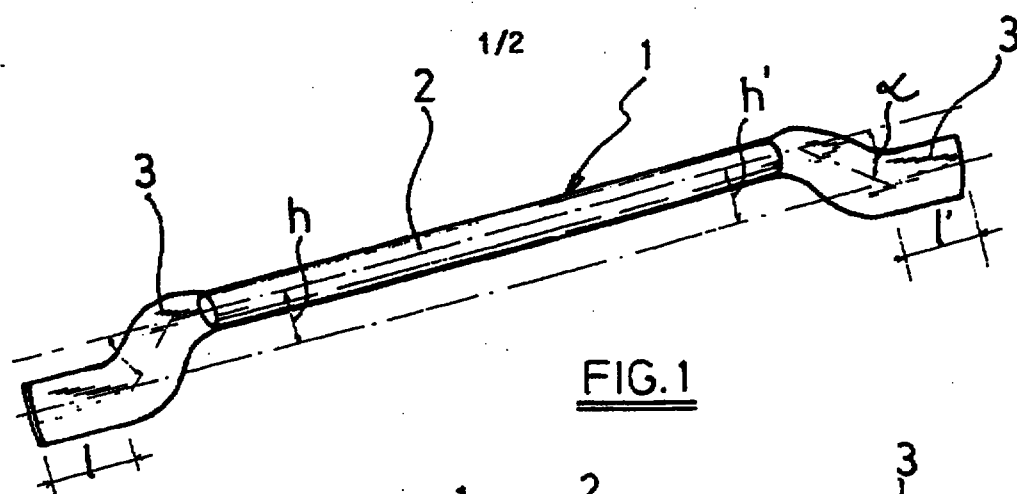

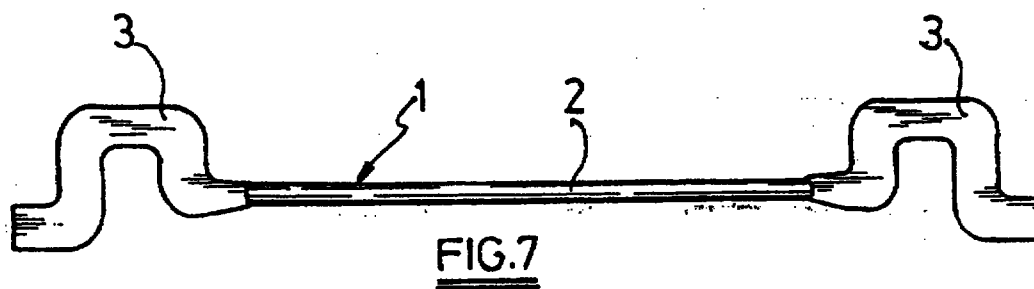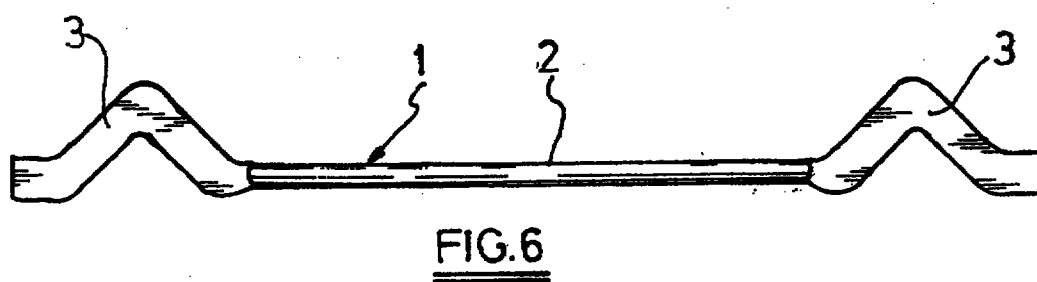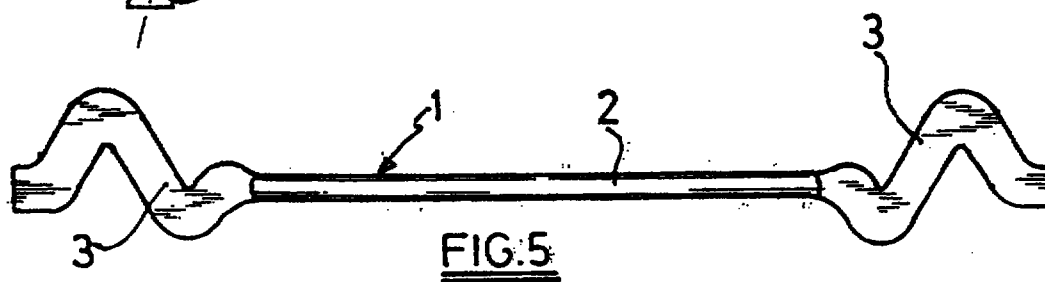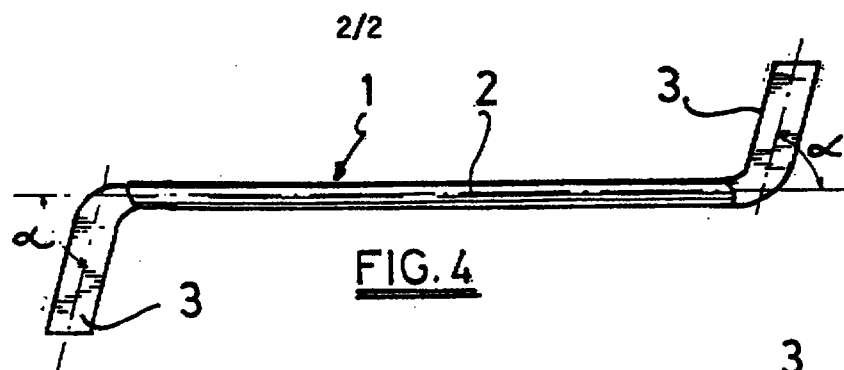

REPLACEMENT SHEET

15 MAR 1999

REPLACEMENT SHEET



CLAIMS

5

1. Steel wire element (1) for mixing into subsequently hardening soft materials, said element consisting of hook-shaped ends (3) and a middle portion (2) the length/diameter ratio of which is between 20 and 100, characterized in that the middle portion (2) of the element
10 (1) displays a substantially circular cross-section over essentially its entire length and that the hook-shaped ends (3) of the element (1) are deformed by flattening.
2. Steel wire element according to claim 1, characterized in that the
15 hook-shaped ends (3) of the wire element (1) are flattened in a plane which is parallel with the plane of the wire element (1).
3. Steel wire element according to claim 1, characterized in that the
20 hook-shaped ends (3) of the wire element (1) are flattened in a plane which is perpendicular to the plane of the wire element (1).
4. Steel wire element according to anyone of the preceding claims 1-3,
25 that the degree of flattened ends (3) is substantially constant over their length.
5. Steel wire element according to anyone of the preceding claims 1-3,
30 that the degree of flattening of the flattened ends (3) is variable over their length.

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau




+
IPER
+
Replacement
sheets

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : E04C 5/01	A1	(11) International Publication Number: WO 97/11239 (43) International Publication Date: 27 March 1997 (27.03.97)
(21) International Application Number: PCT/EP96/04080 (22) International Filing Date: 18 September 1996 (18.09.96) (30) Priority Data: 9500769 19 September 1995 (19.09.95) BE (71) Applicant (for all designated States except US): N.V. BEKAERT S.A. [BE/BE]; Bekaertstraat 2, B-8550 Zwevegem (BE). (72) Inventor; and (75) Inventor/Applicant (for US only): LAMBRECHTS, Ann [BE/BE]; Koningsveld 31, B-2200 Herentals (BE). (74) Agents: DEMEESTER, Gabriël et al.; N.V. Bekaert S.A., Bekaertstraat 2, B-8550 Zwevegem (BE).		(81) Designated States: AM, AT, AU, BE, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>

(54) Title: **STEEL WIRE ELEMENT FOR MIXING INTO SUBSEQUENTLY HARDENING MATERIALS**

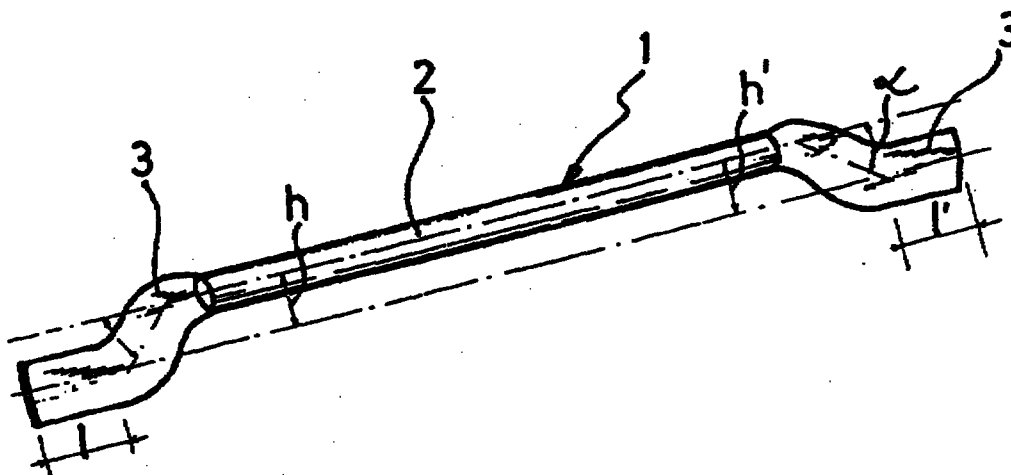

(57) Abstract

The invention relates to a steel wire element (1) for mixing into subsequently hardening soft materials, said element consisting of hook-shaped ends (3) and a middle portion (2) the length/diameter ratio of which is between 20 and 100, in which the middle portion (2) of the element (1) displays a substantially circular cross section over essentially its entire length and in which the hook-shaped ends (3) of the element (1) are deformed by flattening.