

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
26 June 2003 (26.06.2003)

PCT

(10) International Publication Number
WO 03/052319 A1

(51) International Patent Classification⁷: **F22G 3/00**,
F28G 7/00

(21) International Application Number: PCT/NL02/00849

(22) International Filing Date:
19 December 2002 (19.12.2002)

(25) Filing Language: Dutch

(26) Publication Language: English

(30) Priority Data:
1019612 19 December 2001 (19.12.2001) NL

(71) Applicant (for all designated States except US):
GEMEENTE AMSTERDAM [NL/NL]; Gemeen-
telijke Dienst Afvalverwerking, Australiëhavenweg 21,
NL-1045 BA Amsterdam (NL).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **VAN BERLO, Mar-
cellus, Antonius, Jozef** [NL/NL]; Nachtwachtlaan 374,
NL-1058 EN Amsterdam (NL).


(74) Agents: **PLAGGENBORG, Menko, Bernard** et al.;
Octrooibureau Los en Stigter B.V., Weteringschans 96,
NL-1017 XS Amsterdam (NL).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,
SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN,
YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SI, SK,

[Continued on next page]

(54) Title: STEAM SUPER HEATER COMPRISING SHIELD PIPES

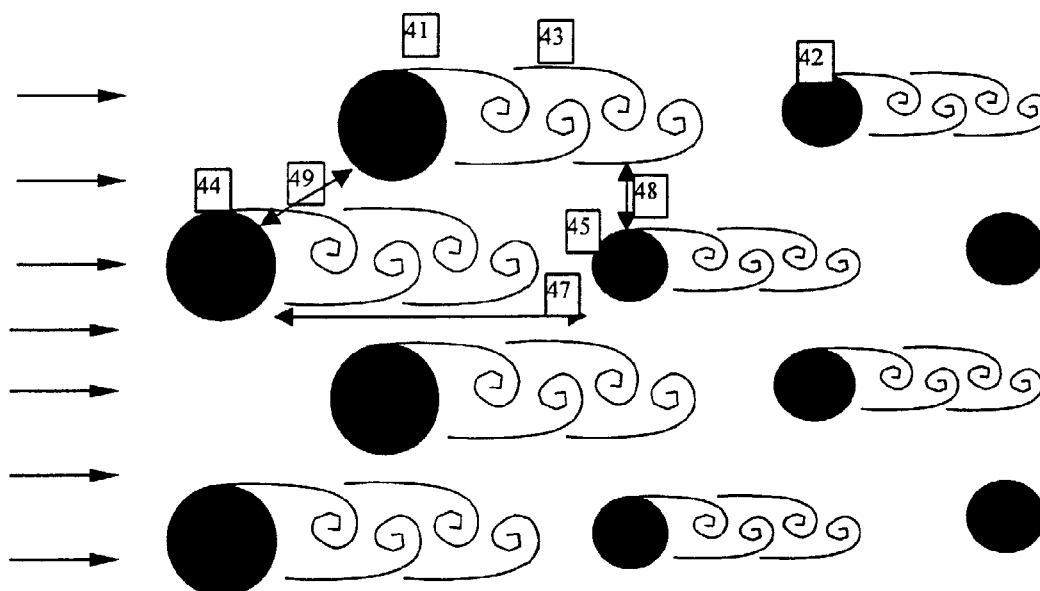

(57) Abstract: The invention relates to a heat exchanger to be used in particular in a waste incineration plant, wherein flue gasses are conducted along pipes through which steam is passed for the production of heated steam. The heat exchanger is comprised of shield pipes (8) and superheater pipes (15) provided immediately behind these. These shield pipes are embodied with a diameter different to that of the pipes which, viewed in the direction of flow, lie behind these. In some cases it is preferred to choose a larger diameter in order to create a lee for the pipes lying behind. In other cases on the other hand, a smaller diameter is possibly more effective because this may reduce the influence of the Von Karman vortices.



WO 03/052319 A1



TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*