



(51) International Patent Classification:

F16L 21/08 (2006.01) *F16L 37/091* (2006.01)
F16L 37/084 (2006.01) *F16L 37/092* (2006.01)

(21) International Application Number:

PCT/NL2009/050338

(22) International Filing Date:

15 June 2009 (15.06.2009)

(25) Filing Language:

Dutch

(26) Publication Language:

English

(30) Priority Data:

2001726 26 June 2008 (26.06.2008) NL

(71) Applicant (for all designated States except US): **Georg Fischer WAGA N.V.** [NL/NL]; Lange Veenteweg 19, NL-8161 PA Epe (NL).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **Nijsen, Andreas Jacobus Louis** [NL/NL]; Cort van der Lindenlaan 24, NL-7521 AT Enschede (NL).

(74) Agent: **VAN BREDA, Jacques**; Weteringschans 96, NL-1017 XS Amsterdam (NL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: COUPLING DEVICE AND METHOD FOR MANUFACTURING A GRIPRING TO BE USED IN SUCH A COUPLING DEVICE

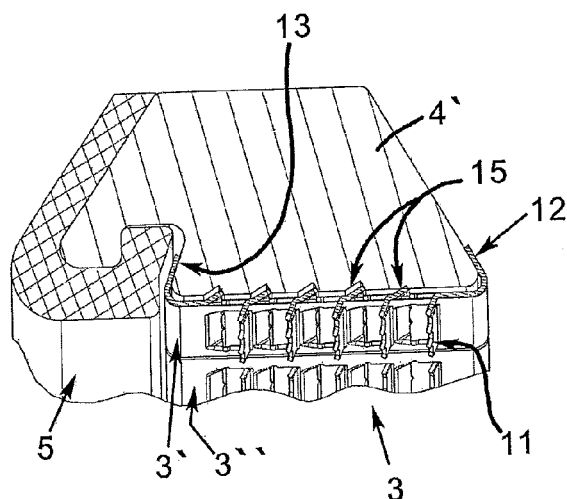


FIG. 3

(57) Abstract: The present invention relates to a coupling device for a tube comprising a coupling piece (1) with an insert end (2) for the tube and a sealing organ (3,4,5) which is suitable for realizing a seal round the in the coupling piece inserted tube, whereby the sealing organ comprises a series of elements which together form a ring (4) enclosing the tube, and whereby the elements have been provided with at least one gripring (3), extending over at least a part of the circumference of the tube, which at least one gripring is embodied with inwardly and/or outwardly pressed out first projections (11) respectively second projections (15) extending away from the surface of the gripring, whereby the first projections respectively the second projections are provided with, in the plane of these projections extending first anchor teeth (16) respectively second anchor teeth (17).