

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
03 October 2019 (03.10.2019)



(10) International Publication Number
WO 2019/186088 A1

- (51) **International Patent Classification:**
A47C 7/38 (2006.01)
- (21) **International Application Number:**
PCT/GB2018/052362
- (22) **International Filing Date:**
20 August 2018 (20.08.2018)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
1805175.5 29 March 2018 (29.03.2018) GB
- (71) **Applicant:** COOLSIDE LIMITED [GB/GB]; 3 Cadogan Street, Glasgow Strathclyde G2 6QE (GB).
- (72) **Inventors:** KELLOCK, David; 13 Arran Road, Troon KA10 6TD (GB). CORRIGAN, Michael; 8 Dowanside Road, Glasgow Strathclyde G12 9DA (GB). LEECH, Thomas; 13 Myatt Road, London SW9 6XF (GB).
- (74) **Agent:** LAWRIE IP LIMITED; 310 St Vincent Street, Glasgow G2 5RG (GB).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

(54) **Title:** ADJUSTABLE HEAD SUPPORTING TRAVEL ACCESSORY

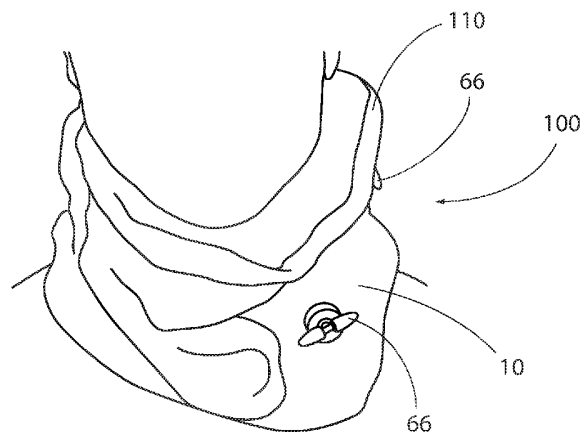


Fig. 6

(57) **Abstract:** An adjustable head supporting apparatus (10) is configured, in use, to be anchored against a user's neck. In the illustrated examples, a garment (110; 200) encases the adjustable head supporting apparatus (100). The apparatus (10) includes a contoured head element (16), a contoured shoulder element (12) and at least one connecting member (14) connectable to each of the head element (16) and the shoulder element (12). The at least one connecting member (14) is configured to link the head element (16) and the shoulder element (12) such that the at least one connecting member (14) facilitates displacing the head element (16) and the shoulder element (12) to adjust spacing between them and the at least one connecting member (14). Displacement of a first end of the head element (16) and displacement of a first end of the shoulder element (12) can be independent of displacement of a second end of the head element (12) and a second end of the shoulder element (12). The head element (12) and the shoulder element (12) are encased within a fabric garment (110, 200), wherein, in use, the fabric garment (110, 200) anchors the adjustable head supporting apparatus (10) against a user's neck.

[Continued on next page]

WO 2019/186088 A1

MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*