

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
30 March 2006 (30.03.2006)

PCT

(10) International Publication Number
WO 2006/032877 A1

(51) International Patent Classification⁷: **F15D 1/02**, F16L 9/00, B01F 5/06, F28F 13/12

(21) International Application Number:

PCT/GB2005/003632

(22) International Filing Date:

21 September 2005 (21.09.2005)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

0420971.4 21 September 2004 (21.09.2004) GB

(71) Applicant (for all designated States except US): **IMPERIAL COLLEGE INNOVATIONS LIMITED** [GB/GB]; 47 Prince's Gate, Exhibition Road, London SW7 2QA (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **CARO, Colin, Gerald** [GB/GB]; Imperial College, Exhibition Road, London SW7 2AZ (GB). **BIRCH, Philip, Lloyd** [GB/GB]; Old

Pockford Cottage, Vann Lane, Chiddingfold GU8 4XU (GB). **TALLIS, William** [GB/GB]; 11 Binswood Avenue, Leamington Spa, Warwickshire CV32 5SE (GB).


(74) Agent: **STEVENS, Jason, Paul**; Frank B. Dehn & Co., 179 Queen Victoria Street, London EC4V 4EL (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

[Continued on next page]

(54) Title: PIPING

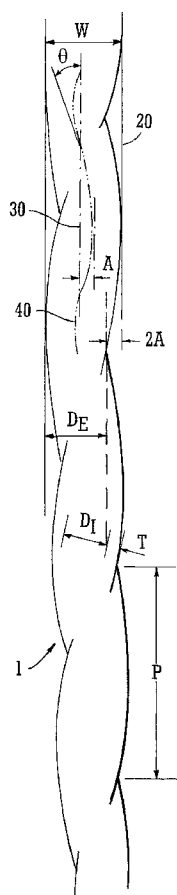

(57) Abstract: The present invention relates to piping (1) for use in industrial activities, where the piping (1) has a specific geometry. In particular, the piping (1) is formed as a lowamplitude helix, which causes fluid flowing through the piping (1) to swirl. This swirl flow provides a large number of advantages. Particular applications where the piping (1) can be used include petroleum production risers and flowlines, production tubing for downhole use in wells, pipelines for the transportation of fluids, static mixers, bends, junctions or the like, penstocks and draft tubes, reactors for chemical, petrochemical, and pharmaceutical applications, heat exchangers, cold boxes, incinerators and furnaces for waste disposal, static separators, and air intakes.



FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT,
RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*