

BACKGROUND OF THE INVENTIONSEMICONDUCTOR DEVICEField of the Invention

The present invention relates to semiconductor devices. More specifically, the present invention pertains to semiconductor devices which comprise closely spaced gate arrays having a plurality of unit semiconductor devices of gate-separated type insulated-gate field-effect transistors, the gates of which have an improved configuration.

Related Art Description

Conventional semiconductor chip products of the channelless gate array type have such an inner layout as shown in Figure 15, in which a matrix of a plurality of gate-separated type unit semiconductor devices 2 is disposed on a silicon chip substrate 1 with a plurality of input/output buffer portions B along the peripheral area of the chip substrate so that they surround the matrix of the unit devices. Figure 16 illustrates a portion of the matrix in an enlarged scale. In this type of gate array, insulated-gate field-effect transistors in the same unit devices are connected with each other and/or those belonging to different unit devices are connected by means of a first and/or second layers of aluminum wire deposited on the gate array, so that a desired large-scale logic circuitry can be obtained.

Figure 17 is a block diagram of the unit device of the gate-separated type. The unit device 2 is comprised of two pairs of complementary insulated-gate field-effect transistors 2a and 2b of the gate-separated type (hereinafter referred to as "CMOSFET"). The gates G of the CMOSFETs are independent of one another, whereas the FETs of the same conductivity type have a common drain D or source S. Figure 18 illustrates a conventional structure of the gate-separated unit device 2. As shown in this Figure, an N-type substrate is formed with a rectangular-shaped region of a P-type well 3 which is formed by diffusing P-type impurities in the substrate. Polysilicon gates 4N, 5N are formed in the P-type well 3 via a gate oxide film so that they are across the P-type well and are symmetrical with each other. Adjacent to the P-type well 3 another pair of polysilicon gates 4P and 5P are formed at the parallel moved positions of the respective gates 4N and 5N in the channel width direction. A heavily diffused N-type region 6 is formed in a self-aligned manner by ion implantation of N-type impurities into the P-type well with utilization of the pair of polysilicon gates 4N and 5N. Likewise, heavily diffused P-type region 7 is formed in a self-aligned manner by ion implantation of P-type impurities into the N-type substrate with utilization of the pair of polysilicon gates 4P and 5P. In addition, a heavily doped P-type stopper 8 is provided by diffusion adjacent to the region 6 in order to

supply voltage V_{DD} to the N-type substrate, and a heavily doped N-type stopper 9 is disposed adjacent to the region 7, the stopper 9 being for supplying voltage V_{SS} to the P well.

Each of the polysilicon gates 4N, 5N, 4P and 5P are of the U-shaped configuration comprising a narrow width gate electrode portion g and rectangular gate output terminal portions T1 and T2 extended from the both ends of the gate electrode portion g. Regions just below the respective gate electrode portions g function as channels. Region, which is located in the heavily diffused N-type region 6 between the parallel disposed gate electrode portions g, functions as a common drain or source region for the two N-channel MOSFETs. The common drain or source region for the two P-channel MOSFET is likewise located between the parallel disposed gate electrode portions g in the heavily diffused P-type region 7.

In the gate array of the above-mentioned gate-separated unit devices 2, as shown in Figure 19, the adjacent CMOSFETs of the same unit device are wired between their gates oppositely arranged with each other so that the gate output terminal portions T1 and T2 thereof are connected via the aluminum wire 11 (shown by solid line) of a first layer through contact holes (denoted by "X" in the drawing), said the first layer being laid on the gates, whereby the shortest wire-connection between the adjacent CMOSFETs can be achieved. The diagonal wire connection

between terminal portions T1 and T2 in the same unit device can be obtained as shown in Figure 20, wherein one pair of diagonally positioned terminal portions T1 and T2 are connected by means of the aluminum wire 111 of a first layer through contact holes. Whereas, the other pair of diagonally positioned terminal portions T1 and T2 are connected by means of aluminum wires 112 and 113 of the first layer and the aluminum wire 12 (shown by double solid line) of a second layer laid on the first layer through contact holes and connecting portions denoted by "O". The separated-type unit device has benefits that it can easily be modified to a common-gate type unit device by such a wiring as shown in Figure 19 and that it can be applied with the diagonal wiring as shown in Figure 20 which is not applicable to the common-gate type unit device. Especially, the applicability of the diagonal wiring is useful to compose functional devices such as transmission gates and the like.

However, the diagonal wiring requires a second or more layered aluminum wires in the case that the wire length is intended to be as short as possible. If the second layered aluminum wires 12 are arranged for connection among the elements within the unit devices, the regions occupied by these second layered wires cannot be utilized to arrange another wires for connection among the remotely positioned functional unit devices and among the functional unit

devices and the input/output buffers, thus those regions are called a "wire prohibited track". Therefore, outer wiring feasibility (defined as ease of wiring among the remotely positioned functional unit devices and among the functional unit devices and the input/output buffers) becomes degraded as the number or area of the inner wires of the second or more layers increases. For example, a D flip-flop shown in Figure 21 can be constituted by two unit devices 2. In this case, "wire prohibited tracks" occur on the second layer of aluminum as shown in Figure 22 due to the diagonal wiring among the inner elements, so that the outer wiring feasibility becomes degraded.

It is of course possible that the two unit devices can be connected without using second layered aluminum wires. However, in this case, the respective aluminum wires of the first layer must be arranged so that they do not cross one another, which means that the total wire length becomes longer, so that the occupied regions for those long wires becomes larger. This degrades inner wiring feasibility (defined as ease of wiring among the elements in each of the unit devices and among the adjacent unit devices). If the first layered wires become complicated and elongated, wire resistance and wire capacity caused by increase of wired area will increase, and so wire time constant will become larger. This will cause a noticable amount of delay in the device operation.

SUMMARY OF THE INVENTION

Accordingly, it is an object of the present invention to provide a unit semiconductor device of the gate-separated type of which gates are designed to have an improved profile, whereby adjacent gates in the unit device can be diagonally connected by using first layered wires only without increase of the wire length.

It is an another object of the present invention to provide a semiconductor device which comprises a gate array of a plurality of unit semiconductor devices having gates of an improved profile to thereby enhance the inner wiring feasibility thereof as well as the outer wiring feasibility.

In order to achieve the above and other objects, according to the present invention, there is provided a semiconductor device having a plurality of unit semiconductor devices arranged in a semiconductor substrate, the unit semiconductor devices being designed to connect selectively among the elements in the same unit devices and among the unit devices to compose a desired logic circuitry, said unit semiconductor devices comprising at least a first insulated-gate type field-effect transistor of a first conductivity type and a second insulated-gate type field-effect transistor of a second conductivity type, and the respective gate electrodes of both types of transistors being formed with a gate terminal portion at the end facing

the other gate electrode, characterized in that said first insulated-gate type field-effect transistor has the gate electrode comprising the gate electrode portion and said gate electrode terminal portion, the profile of said gate electrode terminal portion being such that it has at least a first wire connecting portion and a second wire connecting portion..

The respective gate electrodes are usually made by polysilicon in consideration of self-aligned formation of their source or drain regions. The remaining region of the semiconductor substrate, which does not contribute substantially to the formation of a channel inverted layer, is utilized as the site on which gate terminal portions of the gate electrodes are disposed. The gate terminal portions can be a layer deposited on the layer of the gate electrodes, which, however, requires another process in addition to the gate electrode forming process. Hence, it is recommendable to form the gate terminal portions in the same layer of the gate electrodes at the same time the gate electrodes are formed.

Typical semiconductor devices of master slice layout are provided with gate electrodes designed to have a profile of short channel length and wide channel width in order to decrease on-resistance value. On the other hand, automatic wiring process is usually utilized to connect among the elements in the unit devices and among the unit

devices, wherein wires are arranged along the longitudinal and lateral directions of the grids, and therefore the first and second insulated-gate field-effect transistors are needed to arrange such that the channel regions (the gate electrodes) of the respective transistors are oriented in the same direction, either the longitudinal direction or the lateral direction of the grids. The channel regions of the respective transistors may be arranged between the same longitudinal or the same lateral line of the grids, or they may be in the adjacent, parallel grid lines, respectively.

As mentioned above, the gate terminal portions are formed on regions other than those for source or drain, and the gate electrodes are usually of a narrow width shape. The gate terminal portions formed at both ends of the gate electrode are wide in the channel length direction compared to the gate electrode. In this case, the gate terminal portions are generally designed to have a minimum area of one-grid square.

In a preferred embodiment of the present invention, the first insulated-gate type field-effect transistor is formed with gate terminal portions of a crank shape, wherein each of the gate terminal portions has a first wire connecting portion positioned adjacent to the gate electrode and a second wire connecting portion extending from the first wire connecting portion in a manner to form the crank shape. In addition, the crank-shaped terminal portion has

a connecting portion between the first and the second wire connecting portions, and the third portion may be another wire connecting portion as required.

In another preferred embodiment of the present invention, the gate terminal portions of the first insulated-gate type field-effect transistor are formed to be a rectangular shape, wherein a first terminal portion is positioned adjacent to an end of the gate electrode and a second terminal portion is formed extending from the outer edge of the first terminal portion. The gate terminal portion of this shape occupies at least an area of two-grid.

In this type of gate terminal portion, the first wire connecting portion is used to be connected with wires arranged along a longitudinal and lateral grid lines, respectively. The second terminal portion is also used to be connected with a longitudinal and lateral wires, either one of which is the same one as either one of the wires capable of being connected with the first terminal portion. While, in the case of the above-mentioned crank-shaped terminal portion, wires connectable with the first terminal portions are different from those which are able to be connected with the second terminal portions.

It is apparent that inner and outer wiring feasibilities are improved as the number of wires which can be connected with the gate terminal portions. The increase in the number of wires, however, means that the gate

terminal portions become an increased area, which causes degradation in element-integrity of semiconductor devices. In automatic wiring of the gate terminal portions, wires are arranged along the longitudinal and lateral grid lines. Therefore, the gate terminal portions are preferably designed such that they are able to be connected with wires of different grid lines. Thus, in a preferred embodiment of the present invention, there is provided a semiconductor device wherein gate electrodes of unit semiconductor devices are formed at one end with a gate terminal portion of rectangular shape, characterized in that wire junction portions are provided in the regions surrounded by four gate terminal portions, each of the wire junction portions having an area of at least three-grid. The wire junction portions are preferably formed in the same layer of the gate electrodes by polysilicon or the like.

According to the present invention, each of the gate terminal portions comprises the second wire connecting portion as well as the first wire connecting portion. The second connecting portions can be, for example, used to connect wires of the first layer through contact holes, by which wire length can be reduced in comparison with using only the first connecting portions for wiring. Hence, the unit devices can be diagonally connected as described before, using wires of only the first layer in such a manner that the wire length is not increased. By this

short wiring, the delay time caused by the wiring is reduced, and the inner wiring feasibility is improved. In addition, since the second connecting portions can be utilized for passage of wires of the first layer, wires of the second layer are required in less number, and wire prohibited tracks are reduced in number, whereby the outer wiring feasibility can be enhanced.

Where the gate terminal portions are of a crank shape, the diagonal wiring among the gate terminal portions can be achieved by using only wires of the first layer arranged within the areas on the adjacent gate terminal portions.

While, where the gate terminal portions are of the rectangular shape and the wire-junction portions are provided, the diagonal wiring among the gates is carried out by connecting wires of the first layer to the both ends of the wire-junction portions via contact holes, while other wires of the first layer can be arranged to pass on the middle of the wire-junction portions. According to the arrangement, wires of the first layer which are required for the diagonal wiring do not project onto the source or drain regions. In addition, where the adjacent gate terminal portions are connected, it is possible to make a space between the wires connecting gate terminal portions. The space can be utilized to arrange other wires of the first layer.

BRIEF DESCRIPTION OF THE DRAWINGS

The above and other objects and advantages of the present invention will be apparent from the following detailed description with reference to the attached drawings, in which:

Figure 1 is a diagram illustrating an array of gate-separated type unit devices of a first embodiment of the present invention;

Figure 2 is a plan view of the unit device in an enlarged scale of Figure 1;

Figure 3A is a cross-sectional view of the unit device taken along line A-A in Figure 2;

Figure 3B is a cross-sectional view of the unit device taken along line B-B in Figure 2;

Figure 4 is a layout of the gate-separated type unit device of Figure 2;

Figure 5 illustrates one mode of wiring between gates positioned adjacent to each other in the lateral direction in the gate-separated type unit device in Figure 2;

Figure 6 illustrates diagonal wiring between adjacent gates in the gate-separated type unit device in Figure 2;

Figure 7 is a plan view of a D flip-flop constituted by two unit devices of the first embodiment of the present

invention;

Figure 8 is a diagram illustrating an array of gate-separated type unit devices of a second embodiment of the present invention;

Figure 9 is a plan view of the unit device in an enlarged scale of Figure 8;

Figure 10 is a layout of the gate-separated type unit device of Figure 9;

Figure 11 illustrates one mode of wiring between gates positioned adjacent to each other in the lateral direction in the gate-separated type unit device of Figure 9;

Figure 12 illustrates another mode of wiring between gates positioned adjacent to each other in the lateral direction in the gate-separated type unit device in Figure 9, in which the gates are not provided with second wire connecting portions;

Figure 13 illustrates one mode of wiring between diagonally positioned gates in the gate-separated type unit device of Figure 9;

Figure 14 is a plan view of a D flip-flop constituted by two unit devices of the second embodiment of the present invention;

Figure 15 is a schematic plan view showing an inner structure of a semiconductor chip of a conventional channelless-type gate array;

Figure 16 illustrates an array of gate-separated type unit device of Figure 15;

Figure 17 is a circuit diagram of the unit device of Figure 15;

Figure 18 is an enlarged plan view of the unit device of Figure 15;

Figure 19 shows an example of wiring between the gates positioned adjacent to each other in the lateral direction in the unit device of Figure 15;

Figure 20 shows an example of wiring between the gates diagonally positioned in the unit device of Figure 15;

Figure 21 is a circuit diagram of a D flip-flop composed by MOSFETs; and,

Figure 22 shows an example of wiring between two unit devices of Figure 15 to compose a D flip-flop.

PREFERRED EMBODIMENTS OF THE INVENTION

While the present invention will be described in connection with the preferred embodiments, it will be understood that it is not intended to limit the invention to these embodiments. On the contrary, it is intended to cover all alternatives, modifications, and equivalents as may be included within the spirit and scope of the invention as defined by the attached claims.

Figures 1 to 4 illustrate a first embodiment of the

present invention. As shown by the drawings, a plurality of unit semiconductor devices 12 of gate-separated type are arranged along the longitudinal and lateral directions at the same intervals to form a matrix of the unit devices. Each of the unit devices 12 has a plane structure comprising a pair of N-channel MOSFETs (F_{N1} , F_{N2}) arranged parallel to each other and a pair of P-channel MOSFETs (F_{P1} , F_{P2}) arranged parallel to each other and positioned adjacent to the respective N-channel MOSFETs. The region in which the N-channel MOSFETs are formed is provided with a square region of P well 3 by diffusing P-type impurities into an N-type silicon substrate 20 of low dense impurities. A pair of polysilicon gates 14N and 15N are formed in parallel with each other on the P-type well 3 via gate oxide film 13. A high dense N-type diffused region 6 is formed in a self-aligned manner by ion implantation of N-type impurities with utilizing the polysilicon gates 14N and 15N as masks, this region 6 being source or drain region. Adjacent to the high dense diffused region, a high dense P-type stopper 8 is formed by diffusion which is used for supplying voltage V_{ss} to the P well 3. In addition, oxide films 10 are deposited thickly and partially on the P-type well 3. Likewise, the region in which the P-channel MOSFETs (F_{P1} , F_{P2}) are formed is provided with a pair of polysilicon gates 14P and 15P which are formed in parallel with each other on the substrate adjacent to the P well 3

via the gate oxide film 13. A high dense P-type diffused region 7 is formed in a self-aligned manner by ion implantation of P-type impurities with utilizing the polysilicon gates 14P and 15P as masks, this region 7 being source or drain region. Adjacent to the high dense diffused region, a high dense P-type stopper 9 is formed by diffusion which is used for supplying voltage V_{DD} to the N-type substrate 20. In addition, oxide films 10 are deposited thickly and partially on the P-type well 3.

The polysilicon gates 14P and 15P are shaped to be a substantially flat U-shape and are arranged symmetrically. As shown in Figure 4, each of the polysilicon gates 14P and 15P comprises a narrow width gate electrode g of four-grid length and gate terminal portions T1 and T2 which are integrally connected to both ends of the gate electrode g and are of rectangular shape having an area of one-grid square. The gate terminal portions T1 and T2 have an area sufficient for a single wire connection, that is, for wiring via a single contact hole to form ohmic contact. The regions just below the gate electrodes g, g apart from each other by one-grid distance are for channel regions of four-grid width. Among those, the region between the gate electrodes g, g in the high dense N-type diffused region 7 is utilized as a common source or drain region for the two P-channel MOSFETs. These drain or source regions for the P-channel MOSFETs have four wire connecting positions arranged

in the channel width direction, and the stopper 9 has two wire connecting positions arranged in the same direction.

The polysilicon gates 14N and 15N are formed at the positions the polysilicon gates 14P and 15P moved laterally by a predetermined distance. The gates 14N and 15N have a different shape from the gates 14P and 15P, that is, the gate 14N has a portion of the same shape as of the gate 14P and a portion denoted by oblique lines in Figure 4 integrally added to the former. In other words, the gate 14N comprises a narrow gate electrode portion g of about four-grid length and crank-shaped gate terminal portions T1' and T2' integrally connected to both ends of the gate electrode portion g. The terminal portion T1' adjacent to the gate 14P comprises a first wire connecting position t1 of one-grid square corresponding to the terminal portion T1 of the gate 14P, a second wire connecting position t2 of one-grid square extending from the first terminal position t1 in the channel length direction and a third wire connecting position t3 of one-grid square which is extended from the position t2 in the channel width direction towards the gate 14P and located adjacent to the terminal portion T1 of the gate 14P. The terminal portion T2' opposite to the terminal portion T1' comprises a first wire connecting position t1 of one-grid square corresponding to the terminal portion T2 of the gate 14P, a second wire connecting position t2 of one-grid square extending from the first

terminal position t1 in the channel length direction and a third wire connecting position t3 of one-grid square which is extended outwardly from the position t2 in the channel width direction. The second and third wire connecting positions t2 and t3 denoted by oblique lines in Figure 4 are located on the same grid line on which the stoppers 8 and 9 are located. The gate 14N itself is shaped symmetrically with respect to the line passing through the center thereof in the channel width direction.

The gate 15N is provided with a terminal portion T1" adjacent to the gate 15P, the terminal portion T1" comprising a first wire connecting position t1 of one-grid square corresponding to the terminal portion T1 of the gate 15P, a second wire connecting position t2' of one-grid square extending from the first terminal position t1 in the channel length direction and a third wire connecting position t3' of one-grid square which is extended from the position t2' in the channel width direction toward the gate 14P and located between the terminal portions T2 of the respective gates 14P and 15P. The terminal portion T2" opposite to the terminal portion T1" comprises a first wire connecting position t1 of one-grid square corresponding to the terminal portion T2 of the gate 15P, a second wire connecting position t2' of one-grid square extending from the first terminal position t1 in the channel length direction and a third wire connecting position t3' of one-

grid square which is extended outwardly from the position $t2'$ in the channel width direction. The second and third wire connecting positions $t2'$ and $t3'$ denoted by oblique lines in Figure 4 are located on the grid line between the parallel gates g, g . The gate 15N itself is shaped symmetrically with respect to the line passing through the center thereof in the channel width direction. In addition, the wire connecting positions $t2'$ and $t3'$ of the gate 15N are formed to have the chamfered shape of the wire connecting positions $t2$ and $t3$.

The terminal portions T2 and T2 of the gates 14P and 15P can be connected to the terminal portions T1' and T1" in the following two wiring manners as shown in Figure 5. A first wiring manner is such that the terminal portions T2 and T2 are connected via contact holes (shown by 'X') with the terminal portions T1' and T2' by means of an aluminum wire ℓ_{1Y} of the first layer arranged along Y grid direction. The other wiring manner is such that the terminal portions T2 and T2 are connected via contact holes (shown by 'X') with the terminal portions T1' and T1" at their third connecting positions $t3$ by means of an aluminum wire ℓ_{1X} of the first layer arranged in X grid direction normal to Y grid direction. Thus, where a pair of adjacent gate-separated type CMOSFETs in the same unit device are connected with each other to form a common gate, two ways of the shortest wiring can be obtained with utilizing only the

wires of the first layer having one-grid length. This means that the wiring feasibility is extremely enhanced compared to the conventional devices. The space occupied by the unit device 12 of the present embodiment is four-grid long in X direction by twelve-grid wide in Y direction and so, is the same as that of the prior unit devices of Figure 18. The unit devices of the present embodiment are characterized by adding the second and third wire connecting positions t_2 , t_3 , t_2' and t_3' to the gates 14N and 15N designated by oblique lines in Figure 4 which are located in unused regions of the grid line in which the stoppers 8 and 9 and of the grid line in which the common region of the source or drain are situated. Therefore, increase in the area of the unit devices can be avoided in the present embodiment.

Next, the diagonal wiring of the gates in the unit device 12 can be carried out as shown in Figure 6, wherein the terminal portion T2 of the gate 14P is connected to the terminal portion T1" and the portion T2 of the gate 15P to the portion T1' of the gate 14N. In the illustrated diagonal wiring, the terminal portion T2 is connected to the adjacent terminal portion T1" of the gate 15N at its third wire connecting portion t_3' by means of an aluminum wire ℓ_{1x} of the first layer arranged along the longitudinal grid line (X grid-direction), whereas the terminal portion T2 of the gate 15P is connected to the terminal portion T1' of

the gate 14N at its third wire connecting position t1 by means of an aluminum wire ℓ_{1xy} of the first layer arranged so that it passes on the first and second wiring positions t1 and t2' of the terminal portion T1' in this order. In the present embodiment, a space of three-grid length in X direction by two-grid width in Y direction is defined by the terminal portions T2 of the respective gate 14P and 15P, the terminal portion T1" of the gate 15N, and the first wire connecting positions t1 of the terminal portions T1" and T1' of the respective gates 15N and 14N, in which space the diagonal wiring among the gates can be performed by the aluminum wires of the first layer without utilizing aluminum wires of the second layer deposited on the first aluminum layer. The benefits obtained from using only the first aluminum layer are that wire prohibited tracks occurring due to the use of second aluminum layer can be avoided, which contributes to enhancement of the outer wiring feasibility. As shown in Figure 20, according to the prior wiring, it is inevitable to arrange the aluminum wires ℓ_{13} and ℓ_2 of the first and second layers one on the other in the opposite directions and to arrange wires such as the aluminum wire ℓ_{12} to the extent on the gate electrodes g and so, the wires cannot be arranged within the space of three-grid length by two-grid width. In contrast, according to the present embodiment, since aluminum wires of the second layer do not need to be utilized and wires do

not go over the gate electrodes g , the wiring length can be reduced. Therefore, the capacity and resistance caused by wiring can be reduced at the same time, and the inner wiring feasibility can be enhanced as well as the delayed time caused by the wiring can be reduced.

Figure 7 illustrates a D flip-flop comprised by the two unit semiconductor devices of the present embodiment, the flip-flop being the same as that of Figure 22. It should be noted in Figure 7 that the wiring length is extremely reduced and that no prohibited tracks of the second wires occur. The terminal portions $T1'$, $T2'$, $T1''$ and $T2''$ of the respective gate 14N and 15N are all provided with the second and third wire connecting positions. Alternatively, as is apparent from the wiring illustrated in Figure 6, unit devices without terminal portions $T1'$, $T2'$ and $T2''$ of the respective gates 14N and 15N can be used to thereby enhance the inner and outer wiring feasibilities in comparison with those of the prior art unit devices.

Figures 8 to 10 illustrate another embodiment of the present invention, in which elements corresponding to the above-mentioned embodiment are designated by the same reference numerals. As shown in Figure 8, a plurality of unit semiconductor devices 22 are arranged to form a matrix. Each of the unit semiconductor devices 22 is illustrated in Figure 9. The unit semiconductor device 22 comprises a pair of parallel N-channel MOSFETs (F_{N1} , F_{N2}) and a pair of

parallel P-channel MOSFETs (F_{P1} , F_{P2}). The N-channel MOSFETs have polysilicon gates 24N and 25N, respectively, which are of a substantially flat U-shape and are disposed symmetrically with each other. As shown in Figure 10, each of the polysilicon gates 14N and 15N comprises a narrow gate electrode portion g of about four-grid length and terminal portions T1 and T2 of one-grid square integrally connected to the both ends of the gate electrode g. The terminal portions T1 and T2 have an area sufficient for wiring via a single wire connecting position, that is, a single contact hole. The gate electrodes g are spaced by one-grid distance, below which channel regions of four-grid length are formed. Among these, the channel region between the parallel gate electrodes g, g in the high dense N-type diffused region 6 is a common drain or source region for the N-channel MOSFETs.

While, polysilicon gates 24P and 25P of the P-channel MOSFETs are substantially of a flat U-shape and disposed on the positions the polysilicon gates are moved laterally by a predetermined distance. The gates 24P and 25P are designed to have a shape different from the gates 24N and 25N. The gate 24P comprises a portion having the same shape as that of the gate 24N and a portion denoted by oblique lines in Figure 10. That is, the gate 24P comprises a narrow width gate electrode portion g of substantially four-grid length and rectangular terminal

portions T11 and T22 of two-grid in area. The terminal portion T22 is located adjacent to the gate 24N and is comprised by a first wire connecting position t1 of one-grid square corresponding to the terminal portion T2 of the gate 24N and a second wire connecting position t12 of one-grid square extending outwardly in the channel width direction from the first wiring position t1. The other terminal portion T11 is comprised by a first wire connecting position t1 of one-grid square corresponding to the terminal portion T1 of the gate 24N and a second wire connecting position t12 of one-grid square extending outwardly in the channel width direction from the first wire connecting position t1.

Likewise, the gate 25P adjacent to the gate 25N has a terminal portion T22 which comprises a first wire connecting position t1 of one-grid square corresponding to the terminal portion T2 of the gate 25N and a second wire connecting position t12 of one-grid square extending outwardly in the channel width direction from the first wire connecting position t1. The terminal portion T11 located opposite to the portion T22 comprises a first wire connecting position t1 of one-grid square and a second wire connecting position t12 of one-grid square extending outwardly in the channel width direction from the first wire connecting position t1. By adding the second wire connecting position t12, the gates 24P and 25P are eight-grid long in the channel width direction. A region is

defined by the surrounding terminal portions T1, T1, T22, T22 of the gates 24N, 25N, 24P and 25P, in which an isolated wire junction area 28 is arranged. The wire junction area 28 is formed at the same time the gates are formed and so, is formed by polysilicon doped with impurities. The wire junction area 28 has a first wire-junction position P1 between the terminal portions T1 and T2, a second wire-junction position P2 between the second wire connecting positions t12 and t12, and a third wire-junction position P3 between the first wire connecting positions t1 and t1.

In the unit semiconductor device of the above structure, the gates 24P and 25P are connected to the adjacent gates 24N and 25N as shown in Figure 11, wherein the second wire connecting positions t12 and t12 of the respective gates 24P and 25P are connected via contact holes designated by 'X' to the terminal portions T1 and T1 of the gates 24N and 25N by means of aluminum wires ℓ_{1Y} of the first layer arranged laterally (along Y-grid direction). The lateral wiring among the gates can be performed by the shortest wires, that is, one-grid long wires. In addition, the first wire connecting positions t1 and t1 remain unused and so, an aluminum wire ℓ_x can be arranged in the longitudinal direction (X-grid direction) passing therethrough. In contrast, where the terminal portions T1 and T1 of the gates 24P and 25P are not provided with the

second wire connecting position t12 and t12 of one-grid square as shown in Figure 12, there is no space to pass an aluminum wire in the X direction between the adjacent terminal portions, which means that a wire prohibited track of three-grid length occurs between the adjacent terminal portions in the first aluminum layer.

Next, in the unit semiconductor device 22 of the present embodiment, the diagonal wiring among the gates can be carried out as shown in Figure 13, wherein the terminal portion T22 of the gate 24P is connected to the terminal portion T1 of the gate 25N and the terminal portion T22 of the gate 25P to the terminal portion T1 of the gate 24N. As shown in Figure 13, the terminal portion T22 of the gate 24P is connected at its first wire connecting position t1 to the adjacent third wire-junction position P3 of the wire-junction area 28 via an aluminum wire ℓ_{1x1} arranged in X direction, the wire-junction area 28 is connected at its first wire-junction position P1 to the terminal portion T1 of the gate 25N via an aluminum wire ℓ_{1x2} arranged in X direction, and the terminal portion T22 of the gate 25P is connected at its second wire connecting position t12 to the terminal portion T1 of the gate 24N via an aluminum wire ℓ_{1xy} arranged to pass over the second wire-junction position P2 of the area 28 and the second wire connecting position t12 of the terminal portion T22 in this order. The above aluminum wires are all of the first layer.

The above diagonal wiring among the gates can be performed within a space of three-grid length in X direction by three-grid width in Y direction by only the first aluminum layer. In comparison with the unit semiconductor device 12 of Figure 2, although the unit semiconductor device 22 is longer in Y direction by one grid and has an increased area by that amount, it has a benefit that the passage for the aluminum wire ℓ_x is assured between the laterally adjacent terminal portions. Thus, according to the present embodiment, the first layered wires can easily be distributed to thereby obtain more improved outer wiring feasibility.

Figure 14 illustrates a D flip-flop of Figure 21 which is comprised by the two unit semiconductor devices 22. As can be seen from Figure 14, the layout of the flip-flop is simplified so that the total wiring length is extremely reduced and no prohibited tracks occur in the second layer.

The gates 24P and 25P of the unit device 22 are provided with the terminal portions T22 having the second wire connecting portions t12, respectively. Alternatively, only one of the gates 24P and 25P may be provided with the terminal portion T22 having the second wire connecting position t12 in order to perform the diagonal wiring among the gates by using only the first layered wires, which is apparent from Figure 13.



CLAIMS:

1. A semiconductor device comprising a plurality of arranged unit semiconductor devices^(12, 22) said unit semiconductor devices and elements in said semiconductor devices being selectively connected to one another by wires to thereby constitute a desired logic circuitry, characterized in that said unit semiconductor devices comprise at least a first insulated-gate type field-effect transistor^(F_{N1}, F_{P1}) of a first conductivity type and a second insulated-gate type field-effect transistor^(F_{P1}, F_{N1}) of a second conductivity type which is disposed adjacent to said first transistor and has a gate electrode^(14P, 24N) separated from a gate electrode^(14N, 24P) of the first transistor, said gate electrodes of the respective transistors have at least a gate terminal portion^(T₁, T₁, T₂, T₂₂) at the side adjacent to each other, and said gate terminal portion^(T₁, T₂₂) of the first field-effect transistor has at least a first wire connecting portion^(t₁) and a second wire connecting portion(t₃, t₁₂).

2. The semiconductor device as set forth in claim 1, wherein said gate terminal portions of said first and second transistors are connected integrally to said gate electrodes and are formed in the same layer of said gate





electrodes, respectively.

3. The semiconductor device as set forth in claim 2, wherein said first and second transistors have channel regions which are oriented in the same direction.

4. The semiconductor device as set forth in claim 3, wherein said gate electrodes of the first and second transistors are provided with said gate terminal portions which are formed in the regions other than source or drain regions of said transistors and are designed to be wider than said gate electrodes.

5. The semiconductor device as set forth in claim 4, wherein said first wire connecting portion^(T₁) of the first transistor^(F₁₁) and said gate terminal portion^(T₂) of the second transistor^(F₂₁) are arranged on a first and second parallel grid lines, respectively, said first and second grid lines being included in a plurality of lateral and longitudinal lines defined by the routes along which said wires are intended to be arranged.





6. The semiconductor device as set forth in claim 5, wherein said first and second wire connecting portions^(t₁, t₂) of the gate terminal portion^(T₁) of the first transistor^(F_{N1}) are arranged on a third and fourth grid lines, respectively, said third and fourth grid lines being normal to said first and second grid lines.

7. The semiconductor device as set forth in claim 5, wherein said first and second wire connecting portions^(t₁, t₂) of the gate terminal portion^(T₂₂) of the first transistor^(F_{P1}) are arranged on a third grid line normal to said first and second grid lines.

8. The semiconductor device as set forth in claim 7, wherein said unit semiconductor device comprises a third insulated-gate type field-effect transistor^(F_{P2}) of the first conductivity type which is provided with a source or drain region common to that of said first transistor^(F_{P1}) and a gate electrode^(15P) arranged parallel to the gate electrode^(14P) of said first transistor, and a fourth insulated-gate type field-effect transistor^(F_{N2}) of the second conductivity type which is provided with a source or drain region common to that of said second transistor^(F_{N1}) and a gate electrode^(15N) arranged parallel to the gate electrode^(14N) of said second transistor,





and wherein said unit semiconductor device further comprises a wire junction region⁽²⁸⁾ formed in an area surrounded by the first, second, third and fourth gate electrodes of said first, second, third and fourth transistors.

9. The semiconductor device as set forth in claim 8, wherein said wire junction region is formed in the same layer of said gate electrodes.

10. The semiconductor device as set forth in claim 6, wherein said gate terminal portion^(T1) of the first transistor^(T1) is substantially crank-shaped.

11. The semiconductor device as set forth in claim 9, wherein said gate terminal portion^(T2) of the first transistor^(T1) is substantially rectangular.

12. A semiconductor device comprising a plurality of arranged unit semiconductor^C devices, said unit semiconductor^C devices and elements in said semiconductor devices being selectively connected to one another by wires to thereby





constitute a desired logic circuitry, characterized in that:

each of said unit semiconductor devices comprises first and second insulated-gate type field-effect transistors of a first conductivity type and third and fourth insulated-gate type field-effect transistors of a second conductivity type, said first and second transistors being provided with gate electrodes arranged parallel to each other, and said third and fourth transistors being provided with gate electrodes arranged parallel to each other;

each of said transistors is provided with a gate terminal portion of the gate electrode at the side adjacent to the other transistors; and,

said gate terminal portion of the gate electrode of the first transistor comprises at least a first wire connecting portion integrally formed at the end of said gate electrode and a second wire connecting portion extended from said first wire connecting portion and located between said gate terminal portions of the gate electrodes of the third and fourth transistors.

13. A semiconductor device comprising a plurality of arranged unit semiconductor devices, said unit semiconductor devices and elements in said semiconductor devices being selectively connected to one another by wires to thereby

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED



-33-

constitute a desired logic circuitry, characterized in that:

each of said unit semiconductor devices comprises first and second insulated-gate type field-effect transistors of a first conductivity type and third and fourth insulated-gate type field-effect transistors of a second conductivity type, said first and second transistors being provided with gate electrodes arranged parallel to each other, and said third and fourth transistors being provided with gate electrodes arranged parallel to each other;

each of said transistors is provided with a gate terminal portion of the gate electrode at the side adjacent to the other transistors;

each of said gate terminal portions of the gate electrodes of the first and second transistors comprises at least first and second wire connecting portions; and,

a wire junction area is formed in an area surrounded by the respective gate electrodes of said first, second, third and fourth transistors.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

Abstract of the Disclosure (Fig. 2)

SEMICONDUCTOR DEVICE

A semiconductor device of the present invention comprises a plurality of arranged unit semiconductor devices (12) which is designed to compose a desired logic circuitry by selectively connecting among elements in the unit devices and among the unit devices. Each of the unit devices comprises at least a first insulated-gate type field-effect transistor^(FN1) of a first conductivity type and a second insulated-gate type field-effect transistor^(FP1) of a second conductivity type which is disposed adjacent to the first transistor and has a gate electrode^(14P) separated from a gate electrode^(14N) of the first transistor. The gate electrodes of the respective transistors have at least a gate terminal portion^(T1, T2) at the side adjacent to each other, and the gate terminal portion^(T1) of the first field-effect transistors has at least a first wire connecting portion and a second wire connecting portion. By using the second wire connecting portion, wiring in and among the unit devices can be carried out via the shortest aluminum wires of the first layer, so that the wiring feasibility can be enhanced.

Fig. 1

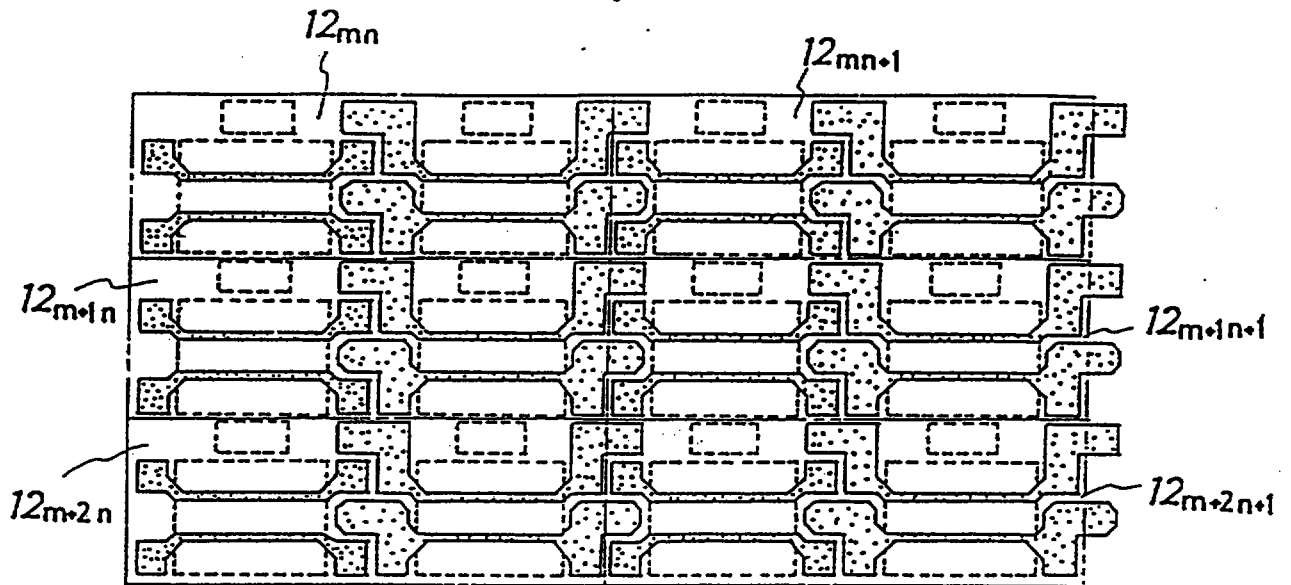


Fig. 2

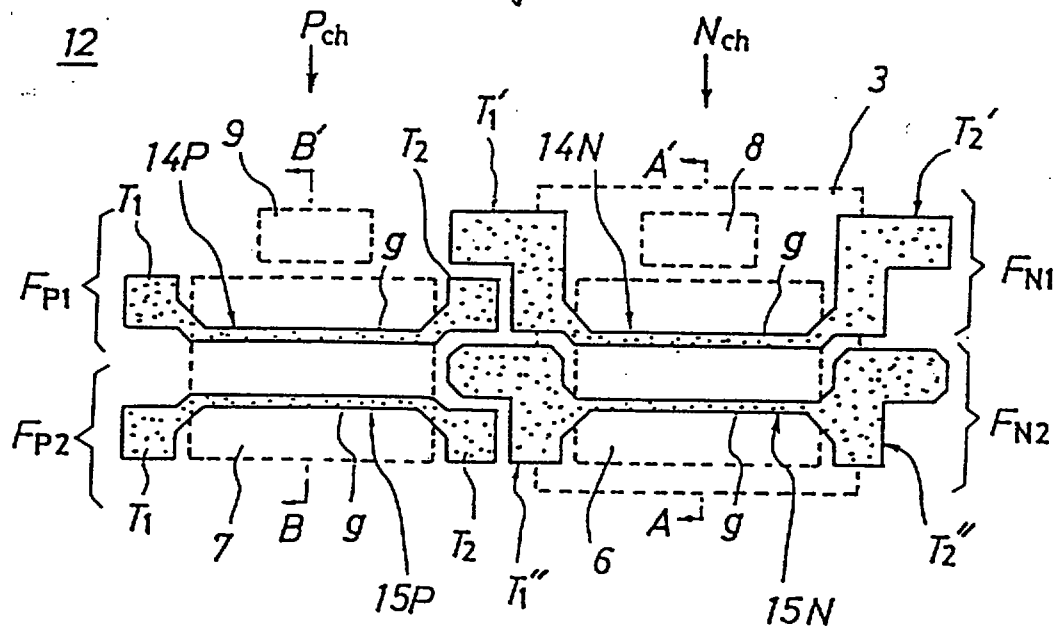


Fig. 3A

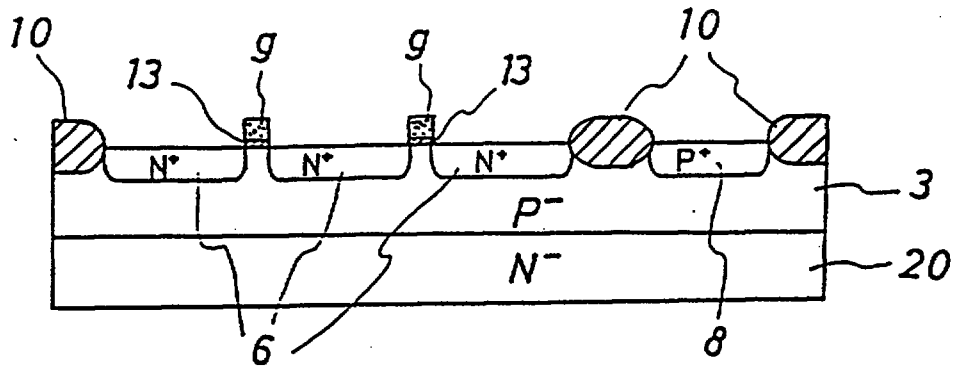


Fig. 3B

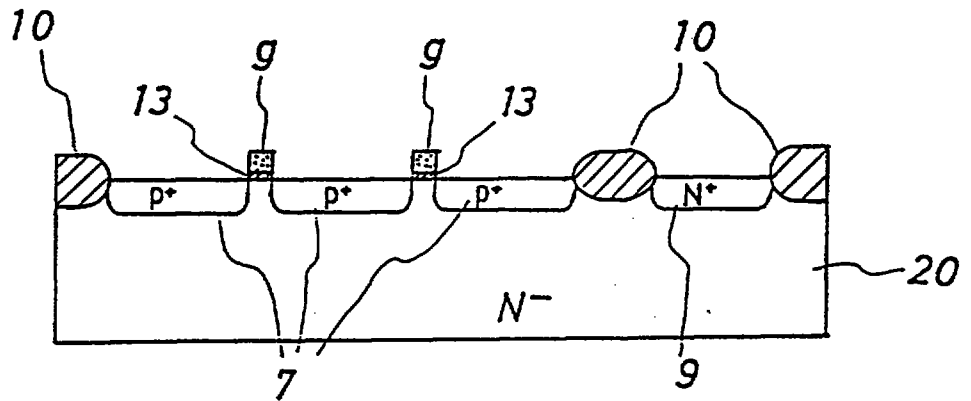


Fig. 4

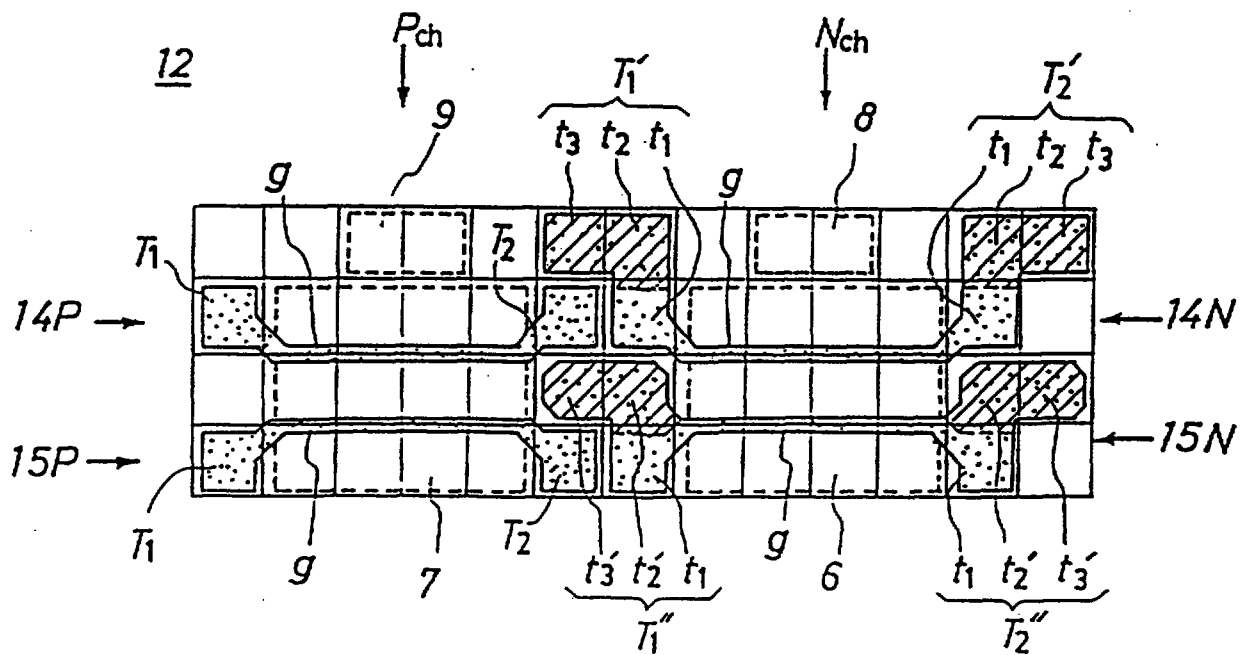


Fig. 5


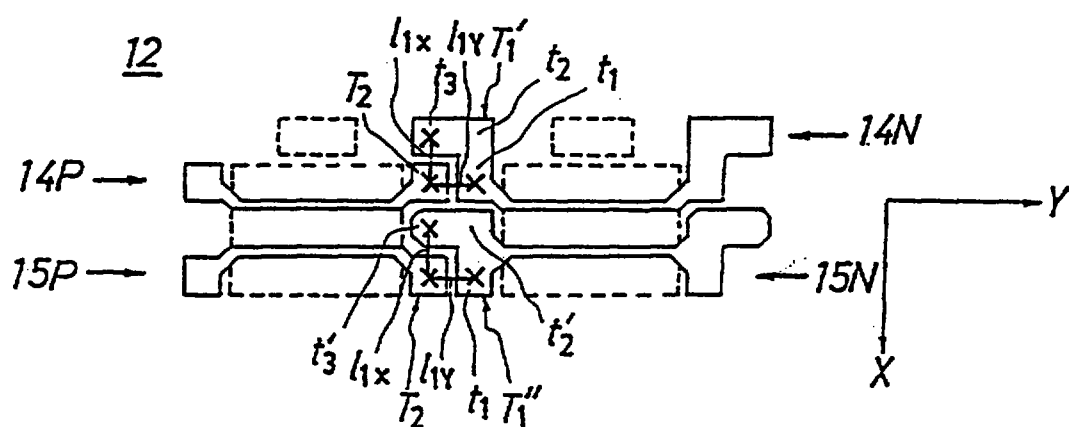


Fig. 6

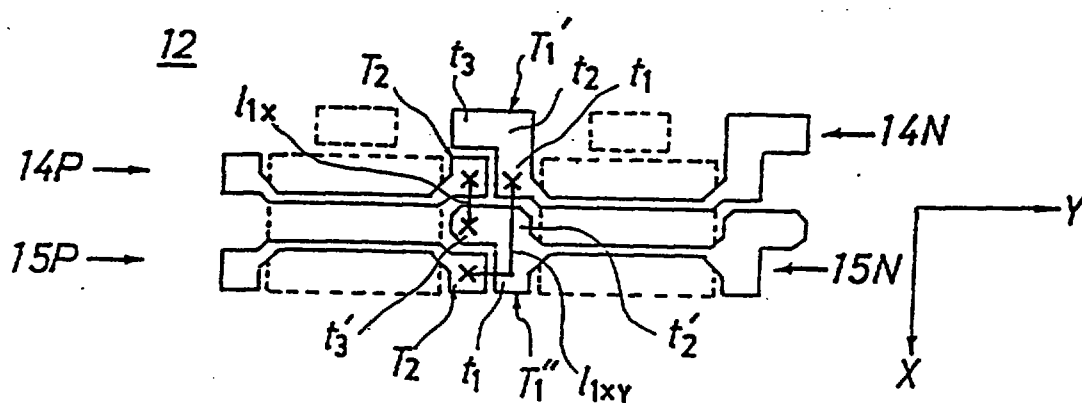

4/12

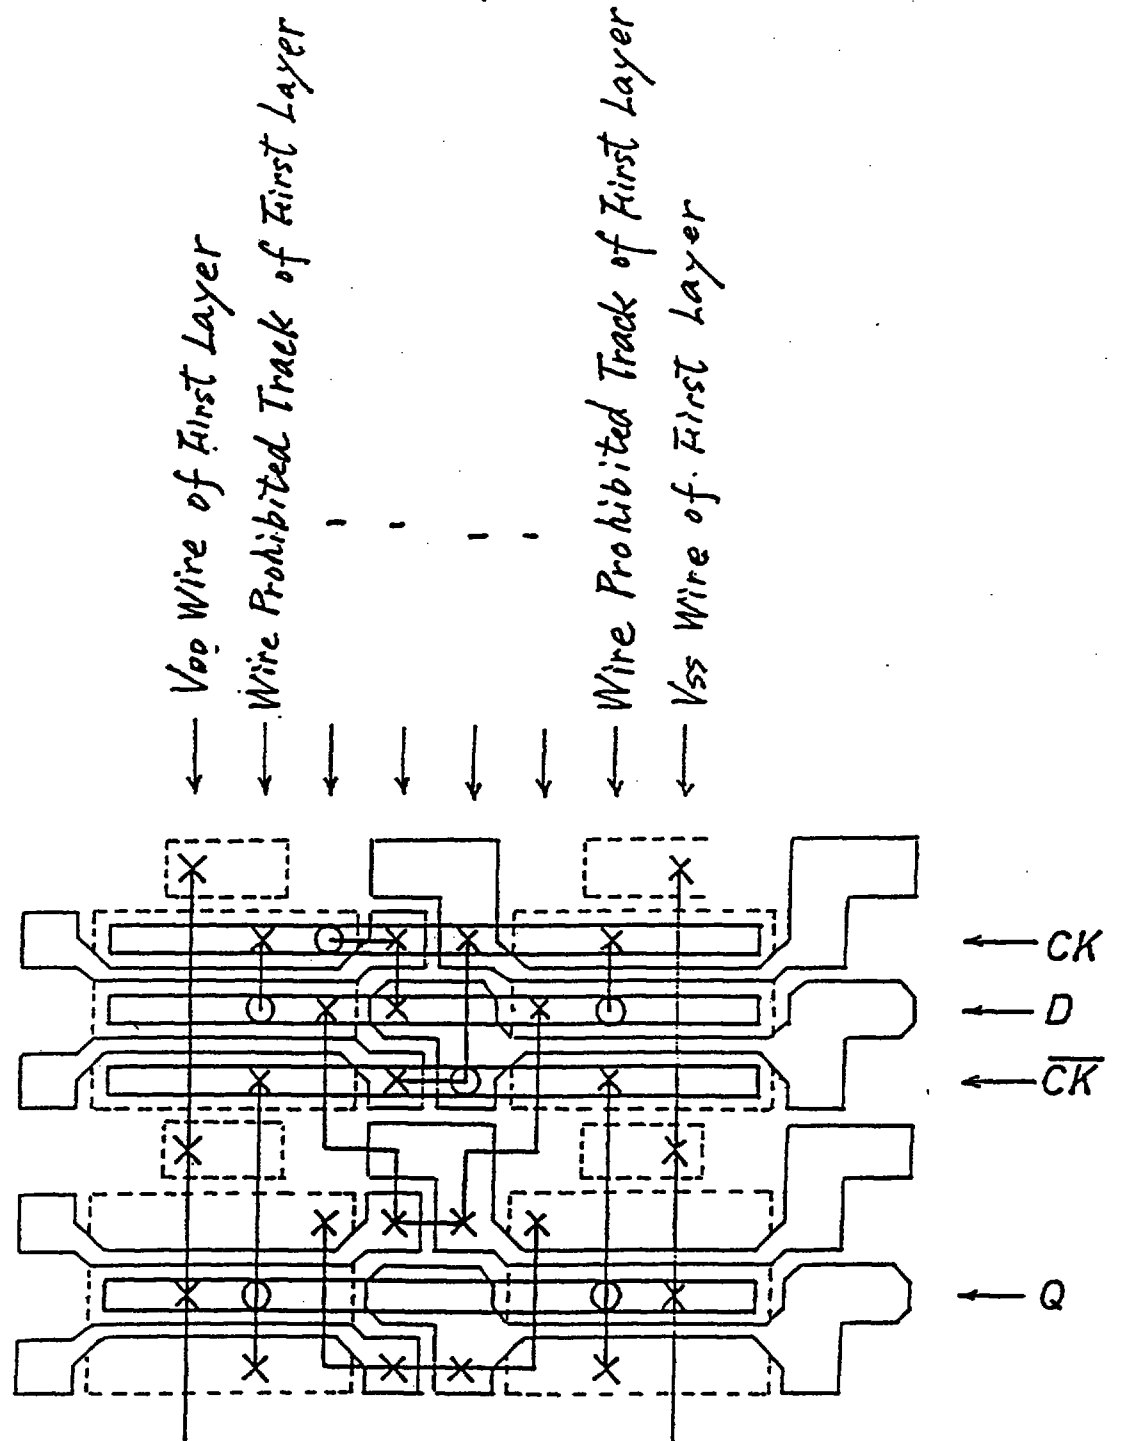


Fig. 7

Fig. 8

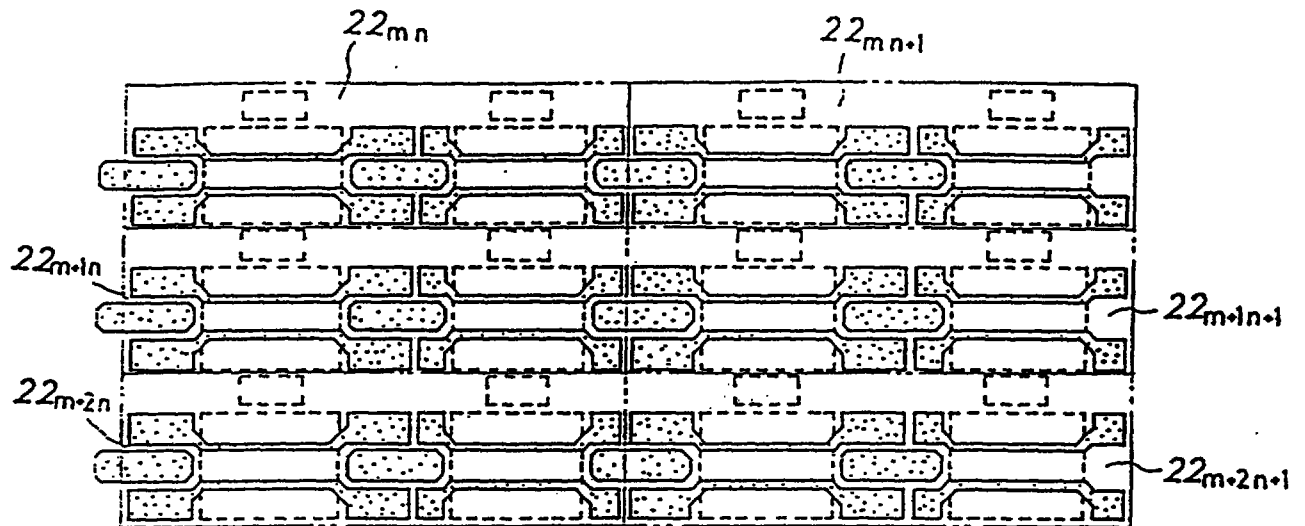


Fig. 9

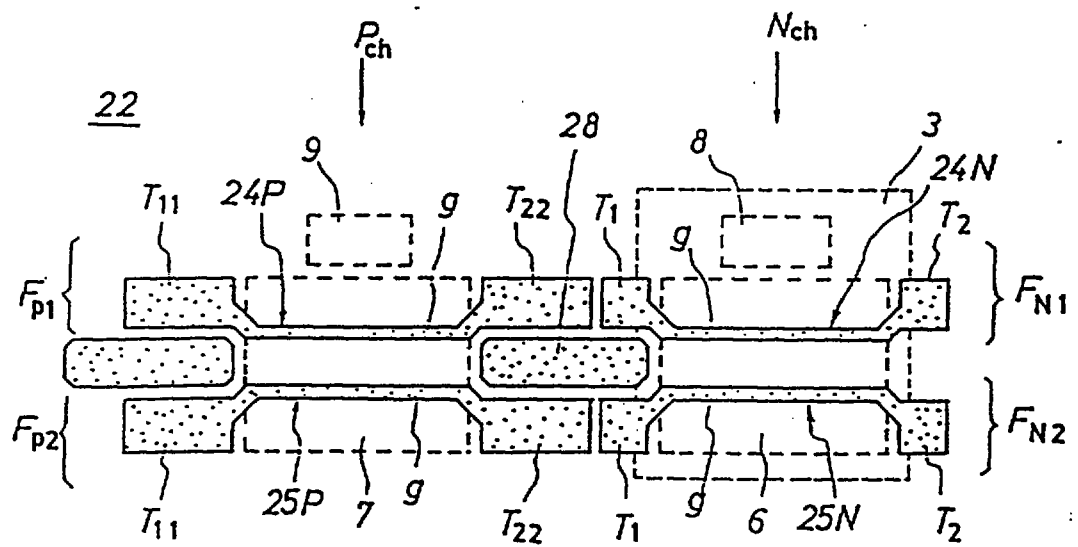


Fig. 10

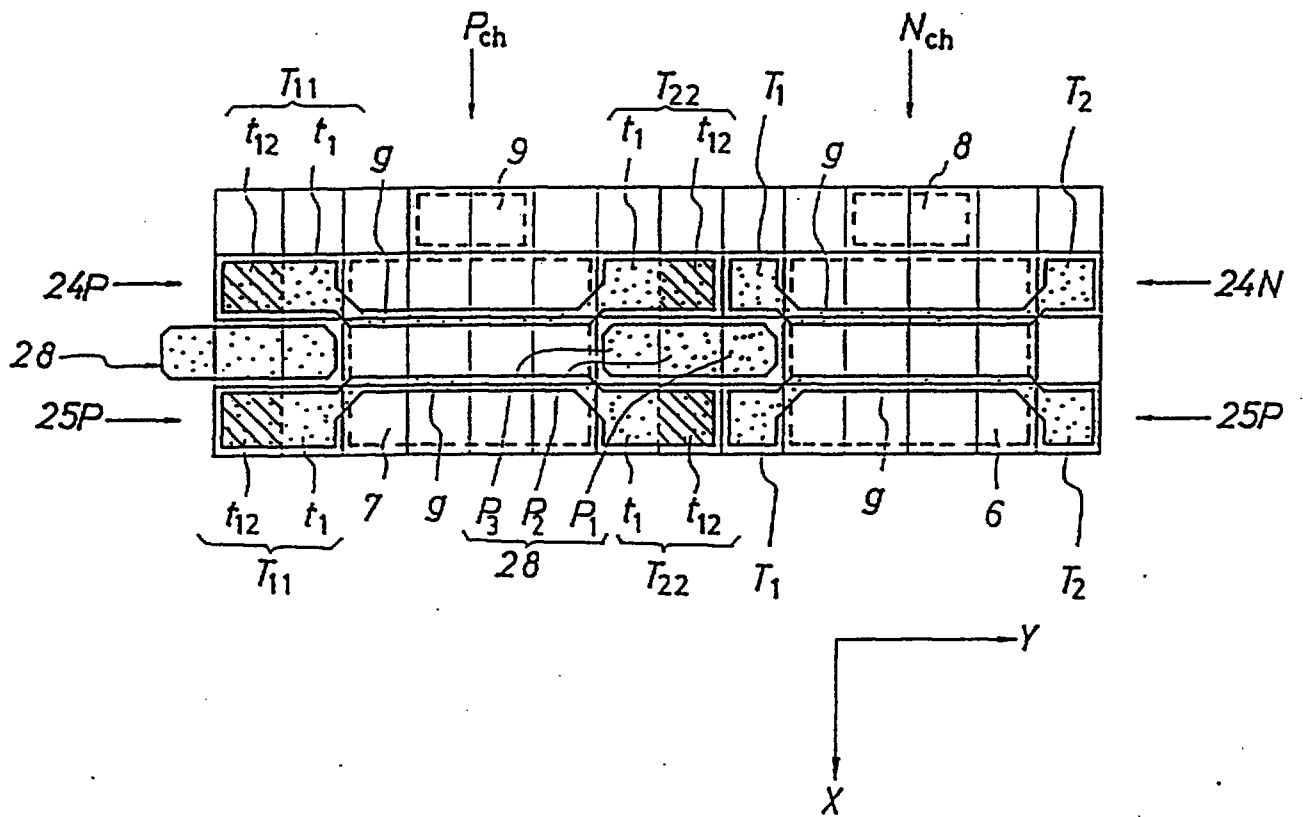


Fig. 11

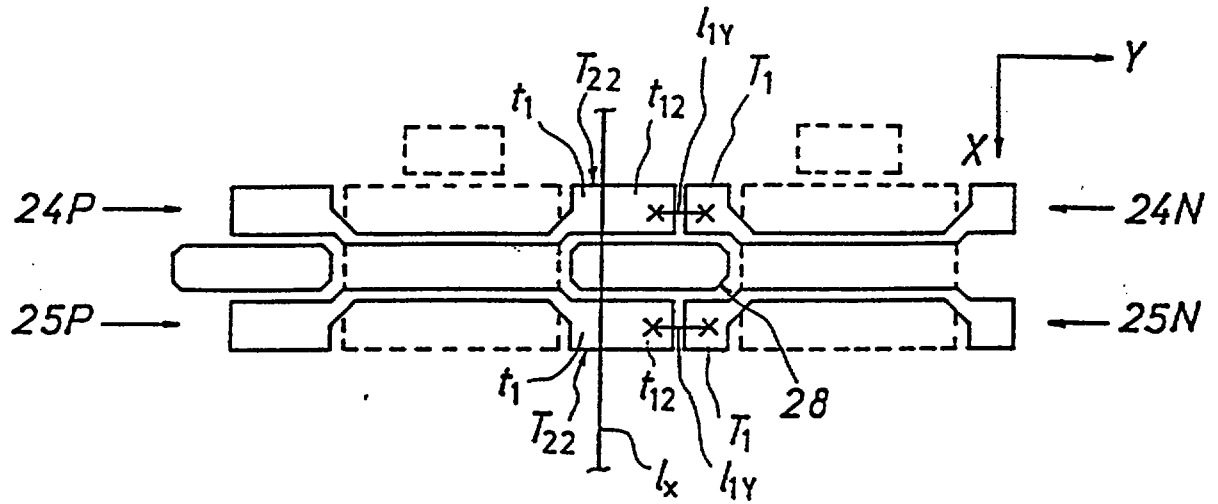


Fig. 12


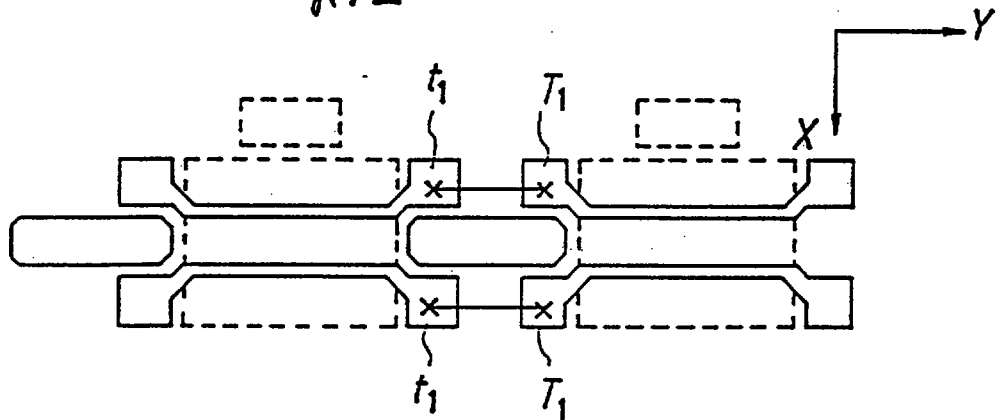


Fig. 13

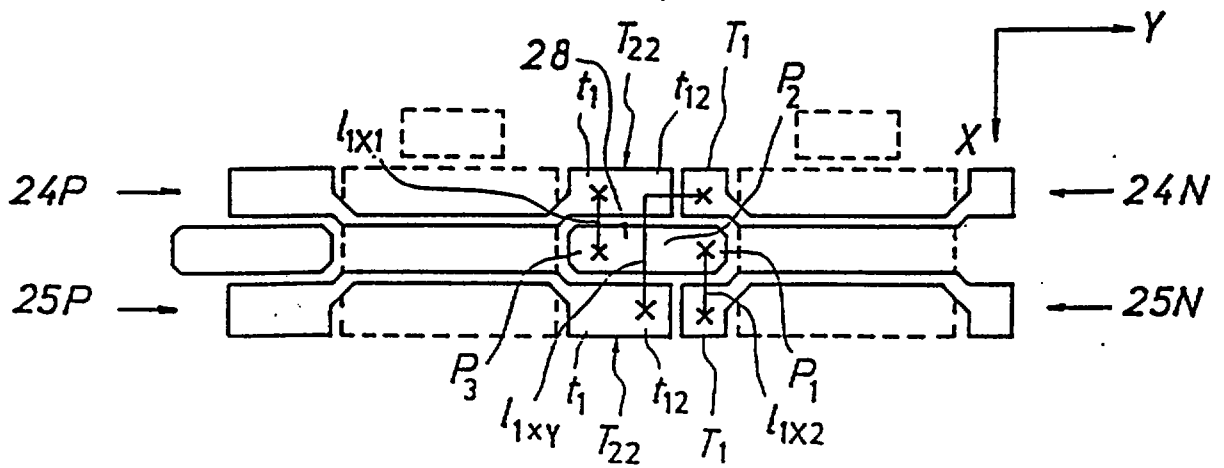

8/12

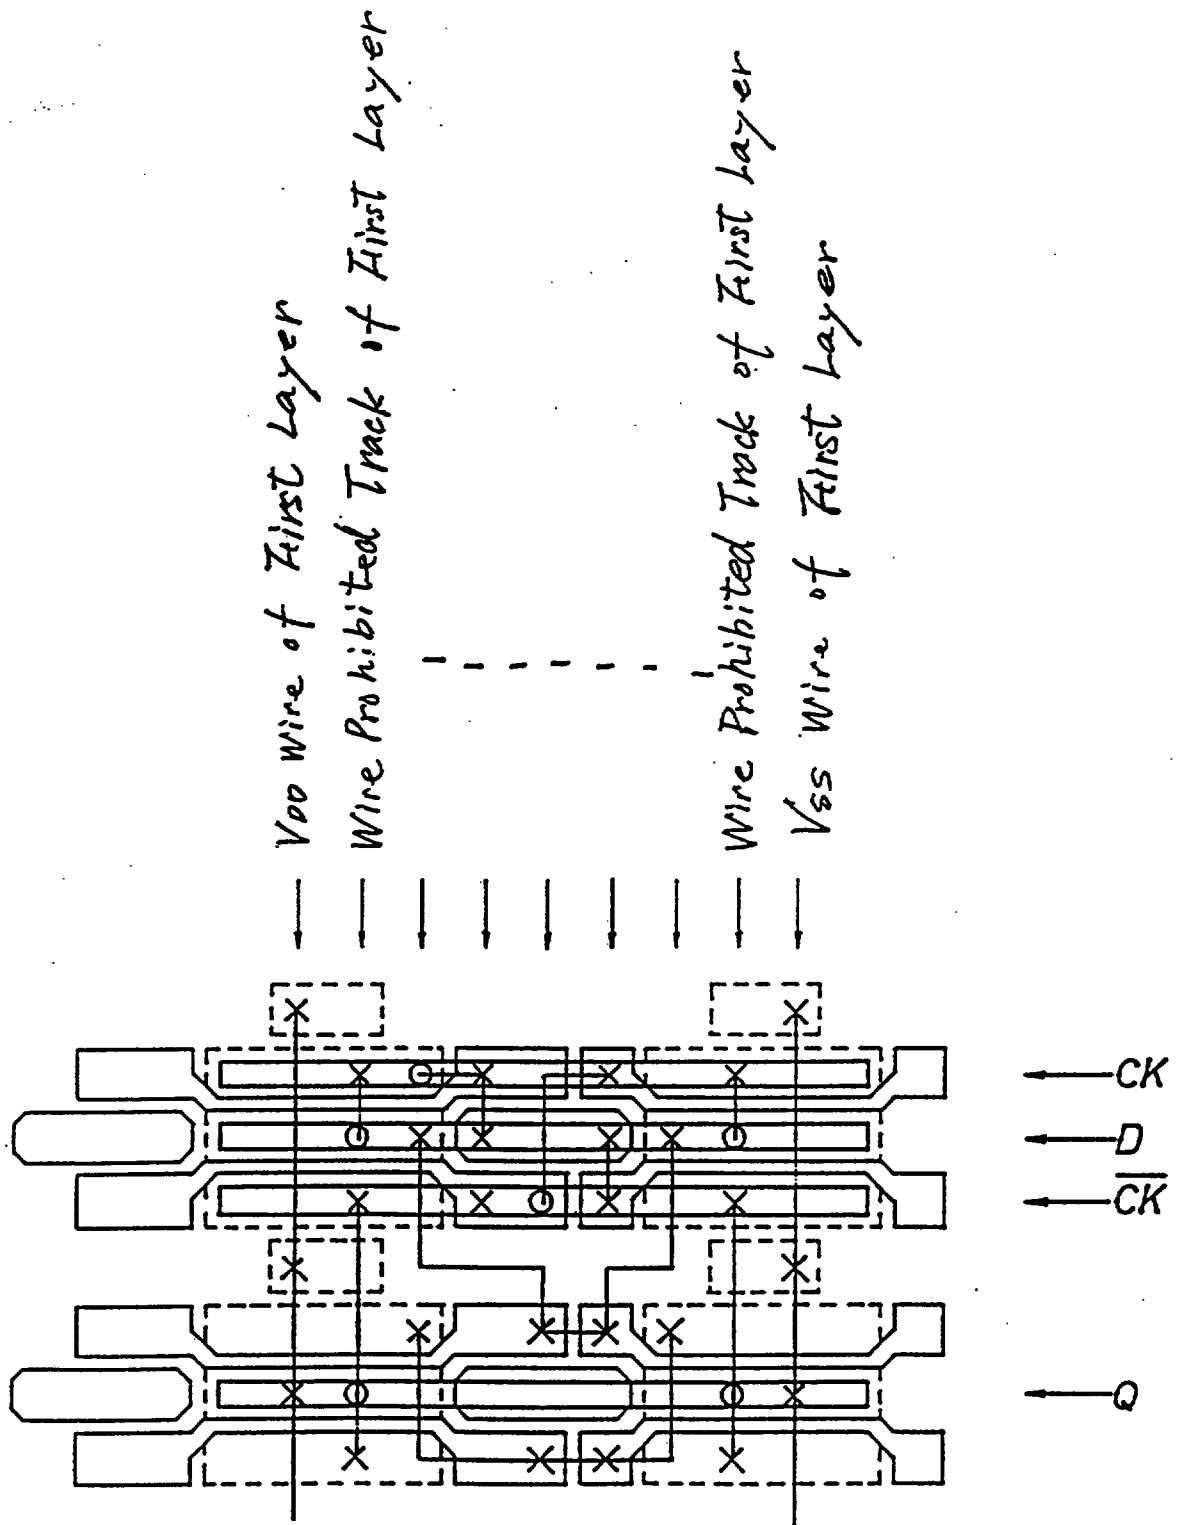


Fig. 14

9/12

Fig. 15

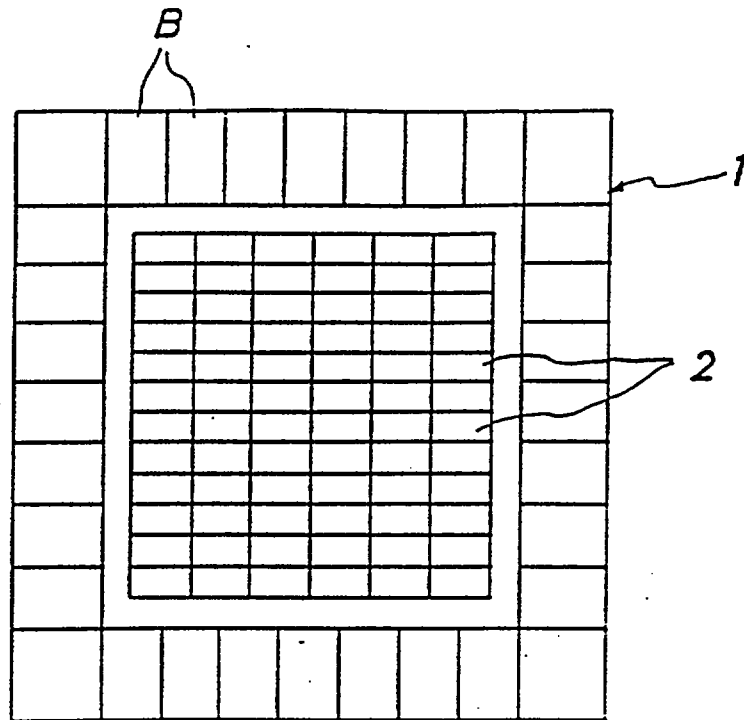


Fig. 16

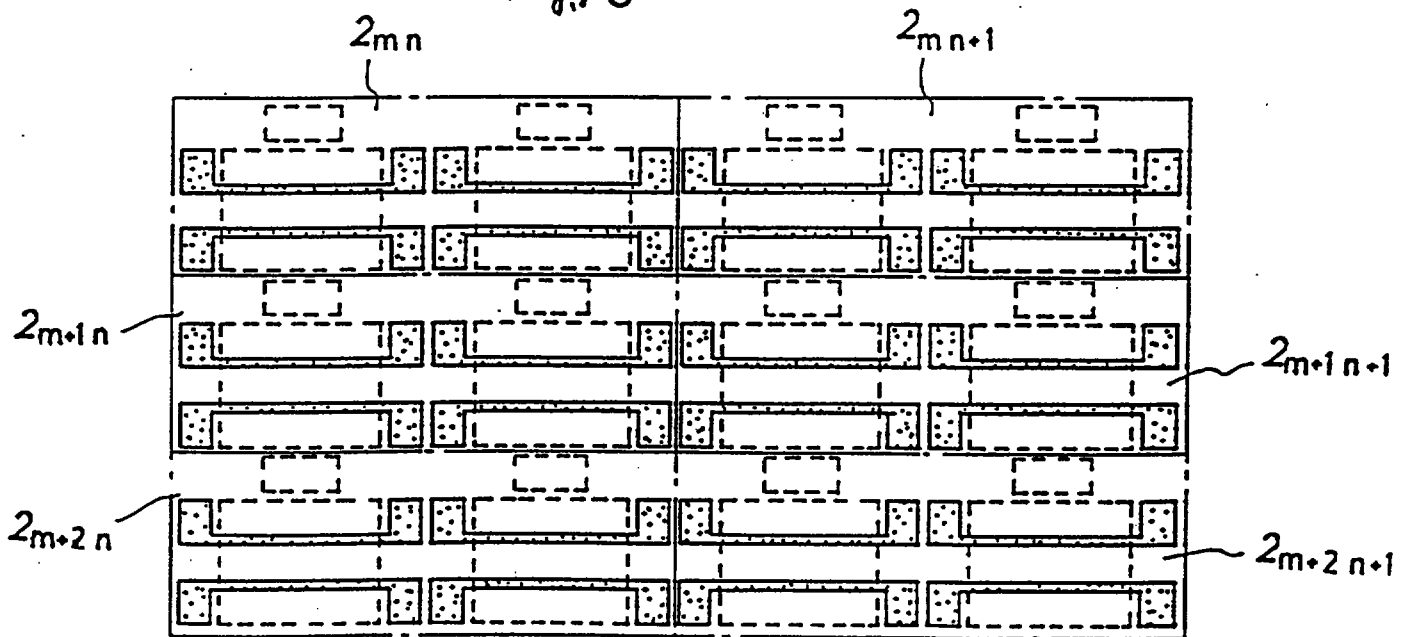


Fig. 17

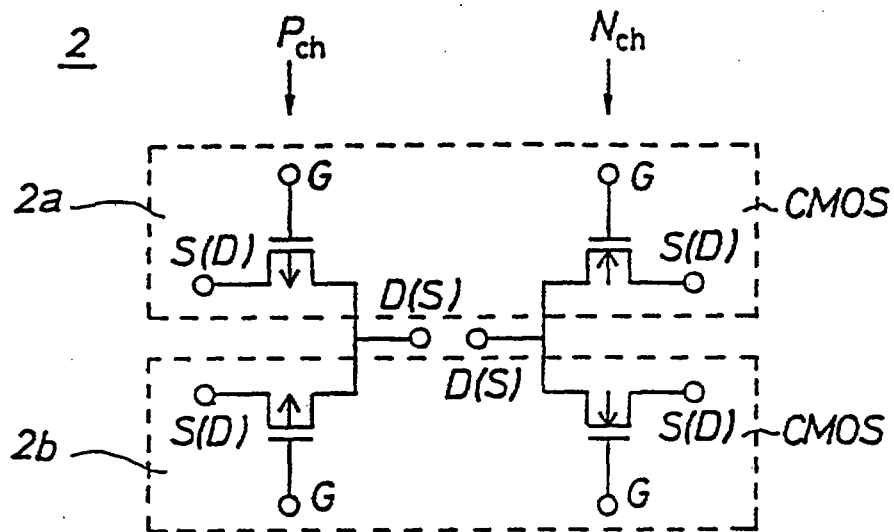


Fig. 18

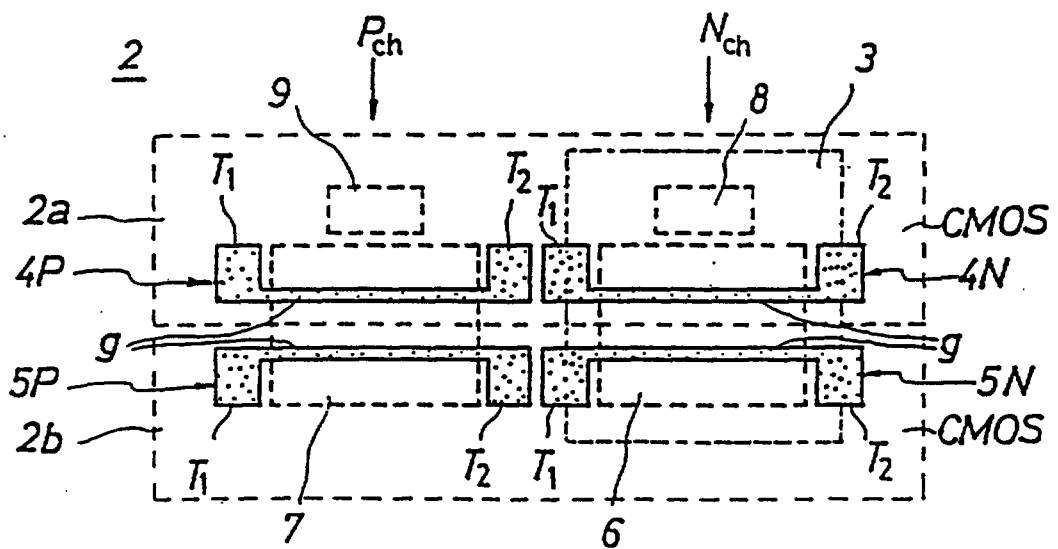


Fig. 19

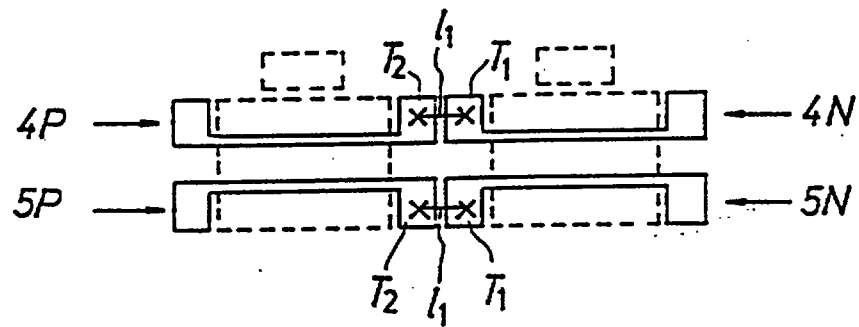


Fig. 20

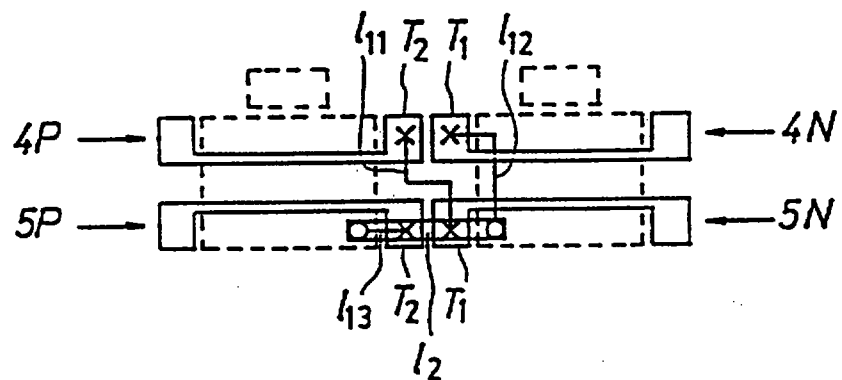


Fig. 21


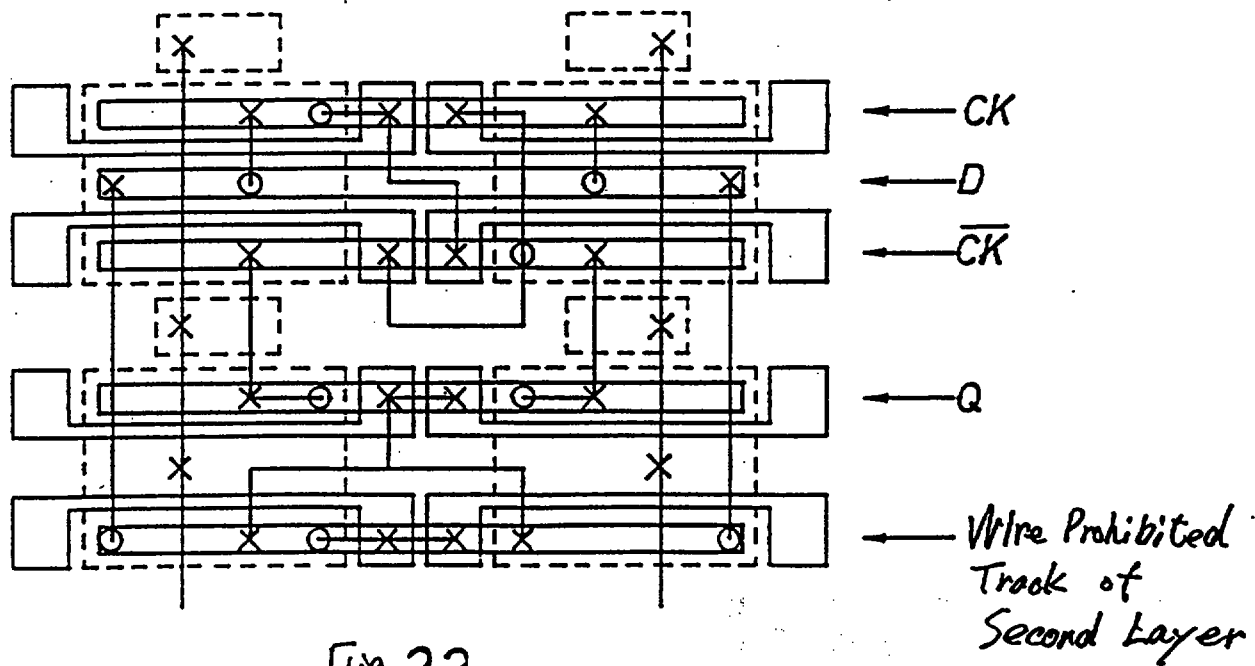


Fig. 22

Related Art

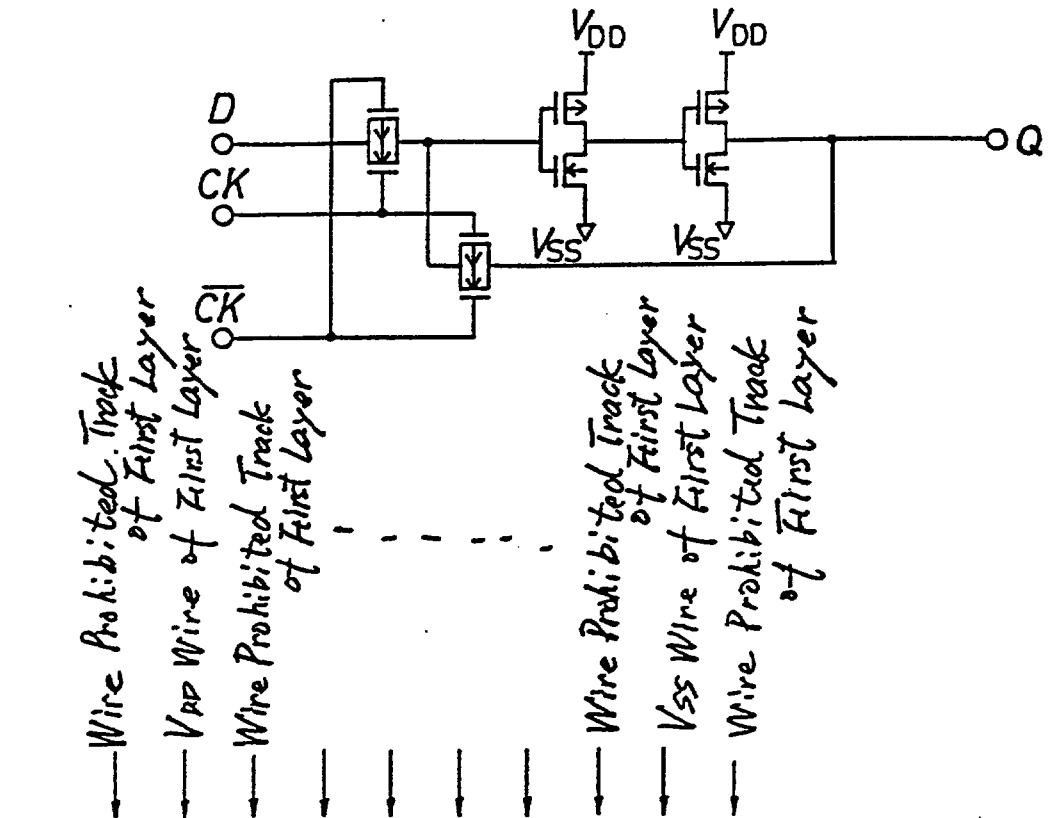

10 JUN 1999

CLAIMS

1. A semiconductor device comprising a plurality of arranged unit semiconductor devices, said unit semiconductor devices and elements in said semiconductor devices being selectively connected to one another by wires to thereby constitute a desired logic circuitry, characterised in that said unit semiconductor devices comprise at least a first insulated-gate type field-effect transistor of a first conductivity type and a second insulated-gate type field-effect transistor of a second conductivity type which is disposed adjacent to said first transistor and has a gate electrode separated from a gate electrode of the first transistor, said gate electrodes of the respective transistors have at least a gate terminal portion at the side adjacent to each other, and said gate terminal portion of the first field-effect transistor has at least a first wire connecting portion and a second wire connecting portion, characterised in that said first wire connecting portion of the first transistor and said gate terminal portion of the second transistor are arranged on first and second parallel grid lines, respectively, said first and second grid lines being included in a plurality of lateral and longitudinal lines defined by the routes along which said wires are intended to be arranged.
2. The semiconductor device as set forth in claim 1, wherein said gate terminal portions of said first and second transistors are connected integrally to said gate electrodes and are formed in the same layer of said gate electrodes, respectively.
3. The semiconductor device as set forth in claim 2, wherein said first and second transistors have channel regions which are oriented in the same direction.
4. The semiconductor device as set forth in claim 3, wherein said gate electrodes of the first and second transistors are provided with said gate terminal portions which are formed in the regions other than source or drain regions of said transistors and are designed to be wider than said gate electrodes.
5. The semiconductor devices as set forth in any preceding claim, wherein said first and second wire connecting portions of the gate terminal portion of the



10 JUN 1999

first transistor are arranged on a third and fourth grid lines, respectively, said third and fourth grid lines being normal to said first and second grid lines.

6. The semiconductor device as set forth in any preceding claim, wherein said first and second wire connecting portions of the gate terminal portion of the first transistor are arranged on a third grid line normal to said first and second grid lines.

7. The semiconductor devices as set forth in claim 6, wherein said unit semiconductor device comprises a third insulated-gate type field-effect transistor of the first conductivity type which is provided with a source or drain region common to that of said first transistor and a gate electrode arranged parallel to the gate electrode of said first transistor, and a fourth insulated-gate type field-effect transistor of the second conductivity type which is provided with a source or drain region common to that of said second transistor and a gate electrode arranged parallel to the gate electrode of said second transistor, and wherein said unit semiconductor device further comprises a wire junction region formed in an area surrounded by the first, second, third and fourth gate electrodes of said first, second, third and fourth transistors.

8. The semiconductor device as set forth in claim 7, wherein said wire junction region is formed in the same layer of said gate electrodes.

9. The semiconductor device as set forth in claim 5, wherein said gate terminal portion of the first transistor is substantially crank-shaped.

10. The semiconductor device as set forth in claim 8, wherein said gate terminal portion of the first transistor is substantially rectangular.

11. A semiconductor device comprising a plurality of arranged unit semiconductor devices, said unit semiconductor devices and elements in said semiconductor devices being selectively connected to one another by wires to thereby constitute a desired logic circuitry, characterised in that:



10 JUN 1999

each of said unit semiconductor devices comprise first and second insulated-gate type field-effect transistors of a first conductivity type and third and fourth insulated-gate type field-effect transistors of a second conductivity type, said first and second transistors being provided with gate electrodes arranged parallel to each other, and said third and fourth transistors being provided with gate electrodes arranged parallel to each other;

each of said transistors is provided with a gate terminal portion of the gate electrode at the side adjacent to the other transistors; and

said gate terminal portion of the gate electrode of the first transistor comprises at least a first wire connection portion integrally formed at the end of said gate electrode and a second wire connecting portion extended from said first wire connecting portion and located between said gate terminal portions of the gate electrodes of the third and fourth transistors.

12. A semiconductor device comprising a plurality of arranged unit semiconductor devices, said unit semiconductor devices and elements in said semiconductor devices being selectively connected to one another by wires to thereby constitute a desired logic circuitry, characterised in that:

each of said unit semiconductor devices comprises first and second insulated-gate type field-effect transistors of a first conductivity type and third and fourth insulated-gate type field-effect transistors of a second conductivity type, said first and second transistors being provided with gate electrodes arranged parallel to each other, and said third and fourth transistors being provided with gate electrodes arranged parallel to each other;

each of said transistors is provided with a gate terminal portion of the gate electrode at the side adjacent to the other transistors;

each of said gate terminal portions of the gate electrodes of the first and second transistors comprises at least first and second wire connecting portions; and



10 JUN 1999

a wire junction area is formed in an area surrounded by the respective gate electrodes of said first, second, third and fourth transistors.

13. A semiconductor device comprising a plurality of unit semiconductor devices (12), each comprising a first insulated-gate type field-effect transistor (F_{P2}) of a first conductivity type and a second insulated-gate type field-effect transistor (F_{N2}) of a second conductivity type, said unit semiconductor devices and transistors being selectively connected by wires to one another to constitute a desired logic circuitry, wherein

said first and second transistors are disposed adjacent to each other,

said first transistor has a first gate electrode (15P) having a first gate terminal portion (T_2) on the side facing said second transistor and a second gate terminal portion (T_1) on the side remote from said second transistor,

said second transistor has a second gate electrode (15N) having a third gate terminal portion (T_1'') adjacent to said first gate terminal portion and a fourth gate terminal portion (T_2'') on the side remote from said first transistor,

characterised in that

said third and fourth gate terminal portions each have first (t_1), second (t_2') and third (t_3') wire connecting portions integrally connected with each other,

one of source and drain regions of said first transistor, said first gate terminal portion (T_2), a first wire connection portion (t_1) of said third gate terminal portion (T_1'') and one of source and drain regions of said second transistor are arranged on a first straight line,

the other one of source and drain regions of said first transistor, the second



10 JUN 1999

32

and third wire connecting portions (t_2' , t_3') of said third and fourth gate terminal portions (T_1'' , T_2'') and the other one of source and drain regions of said second transistor are arranged on a second straight line parallel to said first line,

said first gate terminal portion (T_2) and said third wire connecting portion (t_3') of said third gate terminal portion are arranged on a third straight line perpendicular to said first and second lines, and

the first and second wire connection portions (t_1 , t_2') of said third gate terminal portion are arranged on a fourth straight line parallel to said third line.