(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

G00002

(43) International Publication Date
6 June 2002 (06.06.2002)

PCT

(10) International Publication Number
WO 02/045016 A3

(51) International Patent Classification[7]: G09G 3/36, 5/00

(21) International Application Number: PCT/US01/44919

(22) International Filing Date:
29 November 2001 (29.11.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

09/727,095	29 November 2000 (29.11.2000)	US
09/727,132	29 November 2000 (29.11.2000)	US

(71) Applicant: **THREE-FIVE SYSTEMS, INC.** [US/US]; 1600 N. Desert Drive, Tempe, Arizona 85281-1230 (US).

(72) Inventors: **HUSTON, James**; 28700 Big Basin Way, Boulder Creek, CA 95006 (US). **BERGSTROM, Neil**; 530 Marion Avenue, Palo Alto, CA 94301 (US). **XU, Gang**; 10092 Amador Oak Court, Cupertino, CA 95014 (US).

(74) Agent: **SLAYDEN, Bruce W., II**; Baker Botts L.L.P., One Shell Plaza, 910 Louisiana Street, Houston, Texas 77002-4995 (US).


(81) Designated States *(national)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States *(regional)*: ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— *with international search report*

[Continued on next page]

(54) Title: BALANCED BINARY COLOR AND DIGITALLY CONTROLLED WAVEFORM DRIVE METHODS FOR GRAPHIC DISPLAY

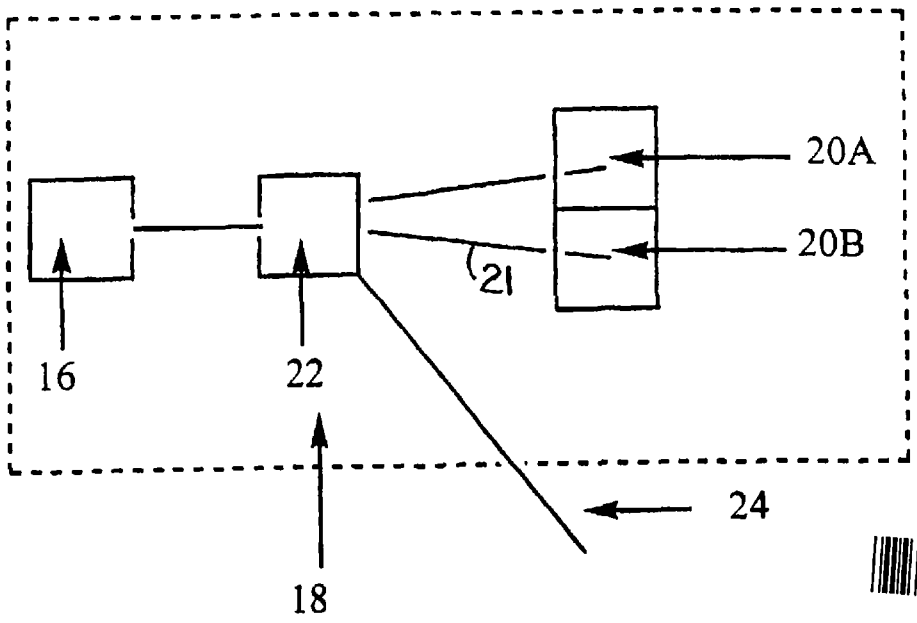

162162

(57) Abstract: An image generation system is provided. A display matrix (12) is provided and has a plurality of display elements (14) which can include liquid crystal. Each display element (14) includes a pixel (16). A plurality of display circuits (18) are electrically connected to a display element. A plurality of memory cells (20A, 20B) are associated with each of the circuit. A selector (21) is used to select the pixel data from one memory cell at a time.

WO 02/045016 A3

(88) Date of publication of the international search report:
20 February 2003

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.