



(43) International Publication Date
16 October 2014 (16.10.2014)

- (51) International Patent Classification:
B65G 11/16 (2006.01)
- (21) International Application Number:
PCT/IN2013/000459
- (22) International Filing Date:
23 July 2013 (23.07.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
396/KOL/2013 9 April 2013 (09.04.2013) IN
- (71) Applicant: **TEGA INDUSTRIES LIMITED** [IN/IN];
147, Block-G, New Alipore, West Bengal, Kolkata 700053 (IN).
- (72) Inventor: **DAS, Gour Chandra**; 147, Block-G, New Alipore, West Bengal, Kolkata 700053 (IN).
- (74) Agents: **DATTA, Subhra Sankar** et al.; 288/1, B.B. Chatterjee Road, Ground Floor, West Bengal, Kolkata 700042 (IN).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- with amended claims and statement (Art. 19(1))

(54) Title: CERAMIC CHUTE LINER

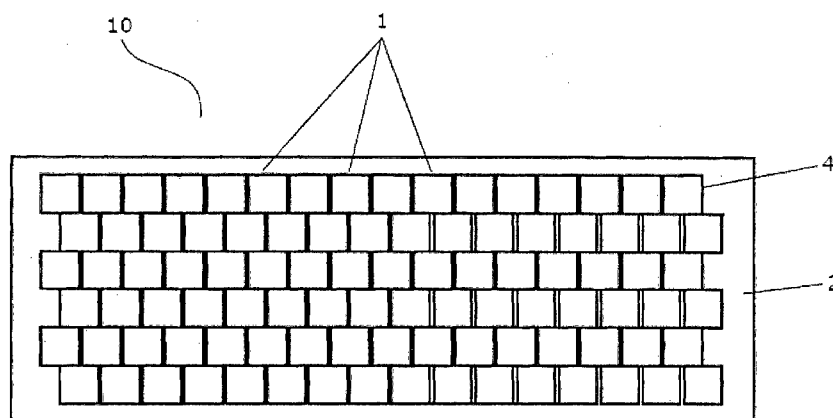


FIG 1

(57) Abstract: A ceramic chute liner (10) comprising of a plurality of mechanically interlocked ceramic blocks (1). The corresponding mechanically interlocked ceramic blocks (1) have rubber films between them along respective adjoining surfaces such that, the ceramic blocks (1) are bonded with each other with substantial strength and the impact force is substantially reduced.