

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
4 November 2004 (04.11.2004)

PCT

(10) International Publication Number
WO 2004/094187 A3

(51) International Patent Classification⁷: **B60R 19/16**,
19/34, 19/38, 19/40, 19/48, F16F 7/12, A01K 3/00, E01F
9/00

(21) International Application Number:
PCT/US2004/010931

(22) International Filing Date: 9 April 2004 (09.04.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/464,072 17 April 2003 (17.04.2003) US

(71) Applicant (for all designated States except US): **EN-
ERGY ABSORPTION SYSTEMS, INC.** [US/US]; One
East Wacker drive, Chicago, IL 60601 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **WELCH, James,
B.** [US/US]; 6703 Long Avenue, Placerville, CA 95667
(US). **WILKINSON, Doug, E.** [US/US]; 6820 Wise Road,
Auburn, CA 95603 (US).

(74) Agent: **STOVER, Andrew, D.**; Brinks, Hofer, Gilson &
Lione, P.O.Box 10087, Chicago, IL 60610 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,
GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

[Continued on next page]

(54) Title: MOUNT FOR TRUCK MOUNTED ATTENUATOR

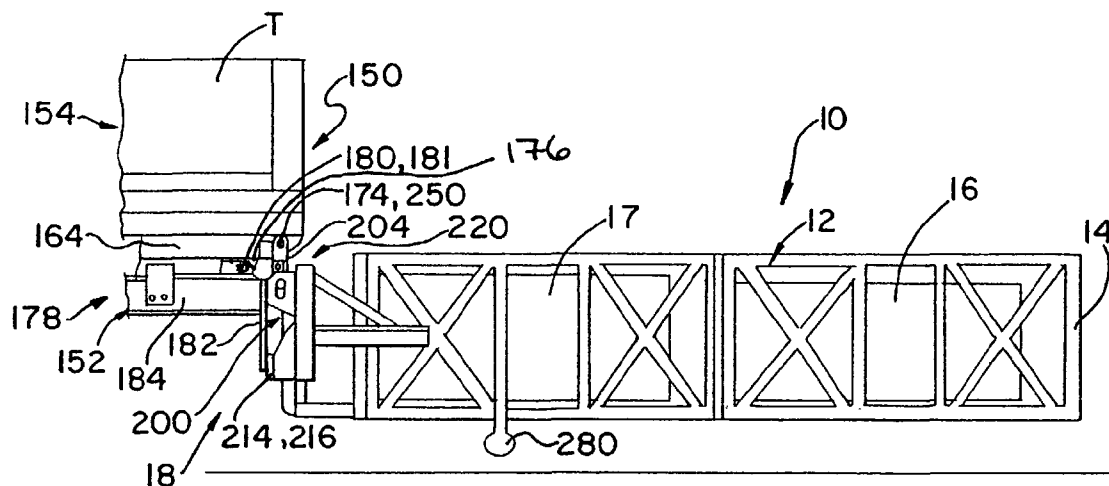

(57) Abstract: A truck mounted attenuator includes an interface structure comprising a pivot mount at a first location and a bearing surface at a second location vertically spaced from the first location. The pivot mount is adapted to be pivotally mounted to a pivotable truck component and the bearing surface is adapted to slidably engage an understructure of the truck. A backup structure is pivotally mounted to the interface structure at a third location and is engaged with the interface structure at a fourth location spaced from the third location. A crash cushion is supported at least in part by said backup structure. This crash cushion can be implemented as described in detail below to provide carefully tailored decelerating loads on the impacting vehicle. In other aspects, a truck outfitted with an impact attenuator and a method for mounting a truck mounted attenuator on a truck are also provided.

WO 2004/094187 A3



(88) Date of publication of the international search report:

15 September 2005

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.