

COLORED BIOFIBER FOR PLASTIC ARTICLES

CLAIM OF PRIORITY

[0001] This application claims priority from U.S. Provisional Patent Application Serial Number 60/951,996 bearing Attorney Docket Number 12007005 and filed on July 26, 2007, which is incorporated by reference.

FIELD OF THE INVENTION

[0002] This invention relates to use of a colorant composition to coat biofiber for use in plastic articles to simulate the appearance of natural wood articles.

BACKGROUND OF THE INVENTION

[0003] Plastic has taken the place of other materials in a variety of industries. In the packaging industry, plastic has replaced glass to minimize breakage, reduce weight, and reduce energy consumed in manufacturing and transport. In other industries, plastic has replaced metal to minimize corrosion, reduce weight, and provide color-in-bulk products. Recently, an entire industry has arisen called "wood polymer composites" (WPC).

[0004] Wood polymer composites are based on the premise that use of biofiber, such as wood fiber and other naturally occurring particulates, as additives to thermoplastic compounds can simulate the appearance of wood while also providing the durability of plastic. Outdoor decorative and structural wood building materials, such as decking, railings, windows, etc. are being made from WPC materials.

[0005] The ability of the WPC material to simulate the appearance of the natural wood, including its surface texture and wood grain coloration is key to value of the WPC to successfully replace the natural wood itself. Moreover,

use of common wood fiber, such as pine, to simulate the appearance of exotic wood is environmentally friendly.

[0006] The art has attempted, without success, to provide durable coloration of WPC materials. Inevitably, the coloration is added as a part of the thermoplastic compounding process, but association of the pigment or dye of such coloration with the wood fiber is circumstantial at best.

[0007] U.S. Patent Publication 2004/0076847 (Saunders Jr. et al.), now abandoned during examination, taught the attempt to color the wood fiber with commercially available pigment dispersions or dye solutions which also contained adjuvants such as thickeners, surfactants, etc. U.S. Pat. No. 6,207,228 (Hundt et al.) taught the use of impregnated waste wood to be bound on the one hand to make plasticized wood products and coloration of wood on the other hand with color impregnating agents of pigment or dye plus fillers or extenders.

SUMMARY OF THE INVENTION

[0008] What the art needs is a composition to durably color biofiber, such as wood fiber or wood flour, so that the colored biofiber can be used with thermoplastic compounds to simulate the appearance of natural wood.

[0009] The present invention solves the problem in the art by using a liquid colorant composition to coat, durably, biofiber with colorant.

[00010] One aspect of the invention is a colorant composition for biofiber, comprising: (a) a carrier; (b) binder; (c) colorant; and (d) surfactant, and optionally (e) at least one functional additive, such as a pH modifier and a defoaming agent.

[00011] Another aspect of the invention is a method of coloring biofiber, comprising the steps of: (a) preparing a colorant composition described above, and (b) mixing the colorant composition and biofiber at an elevated temperature for sufficient time to permit the carrier to be removed and

allowing the other ingredients of the colorant composition to form an colored coating on at least a portion of the biofiber.

[00012] Another aspect of the invention is a coated colored biofiber made using the colorant composition described above.

[00013] Another aspect of the invention is a compound of thermoplastic resin and coated colored biofiber described above.

[00014] One feature of the present invention is that coated colorant on the biofiber remains durably on the biofiber in subsequent compounding of the biofiber with thermoplastic compounding ingredients.

[00015] Another feature of the invention is improving the durability of colored biofiber by coating the biofiber with UV absorbers and photo-stabilizers.

[00016] Another aspect of the invention is improving the durability of colored biofiber by coating the biofiber with inorganic binders such as sodium silicate.

[00017] Other features will become apparent from a description of the embodiments of the invention in relation to the following drawings.

[00018] BRIEF DESCRIPTION OF THE DRAWING

[00019] Fig. 1 is a comparison photo image of samples of compounds of the present invention and a control.

[00020] Fig. 2 is another comparison photo image of samples of compounds of the present invention and a control.

EMBODIMENTS OF THE INVENTION

[00021] Colorant Composition

[00022] Carrier

[00023] The carrier can be any liquid having a vapor pressure at a temperature of less than about 100°C to rapidly evaporate during mixing of the

colorant composition with the biofiber. Organic liquids are acceptable, but water is preferred because of its environmental benignity.

[00024] Binder

[00025] The binder can be any polymer capable of melting at a temperature of less than about 100°C but also capable of forming a film at a temperature above about 25°C. Preferably, the binder is compatible with such polymer resins as polyolefins and polyvinyl halides. As such, the binder which covers the biofiber can permit good dispersion and easier mixing of the biofiber in the filled polymer compound, than if the binder were incompatible with the polymer resin into which the coated biofiber is mixed.

[00026] Non-limiting examples of film-forming polymers are acrylics, styrene-acrylics, styrene-butadienes, polyurethanes, vinyl acetate, vinyl acrylics, and the like. Of these, a styrenic-acrylic emulsion marketed as Esicryl 740 from Cook Composites of Kansas City is preferred.

[00027] Colorant

[00028] Colorant can be a pigment, a dye, a combination of pigments, a combination of dyes, a combination of pigments and dye, a combination of pigment and dyes, or a combination of pigments and dyes. The choice of colorants depends on the ultimate color desired by the designer for the biofiber in the plastic article. Pigments are preferred for durability to resist discoloration because of exposure to ultraviolet light.

[00029] The science of color is well known to those skilled in the art. Without undue experimentation, one can use color matching techniques to identify a particular location in spherical color space. For example, one skilled in the art can use the teachings of PCT Patent Application US2004/012233 to digitally map color space using specific polymer carriers and colorants as raw material ingredients. Alternatively, one can make small samples called plaques for visual review.

[00030] Colorants are commercially available from a number of sources well known to those skilled in the art. Commercially available pigments are

well known to those skilled in the art and include organic and inorganic colorant chemistries. Commercially available dyes are well known to those skilled in the art and include all organic chemistries. Commercial sources for pigments and dyes include multinational companies such as BASF, Bayer, Ciba-Geigy, Color-Chem International, Sun Chemical, Zhuhai Skyhigh Chemicals, and others identified at Internet Web Sites such as <http://www.colorpro.com/info/vendors/colorant.html> and [http://dir.yahoo.com/Business and Economy/Business to Business/Chemicals and Allied Products/Pigments and Dyes/](http://dir.yahoo.com/Business_and_Economy/Business_to_Business/Chemicals_and_Allied_Products/Pigments_and_Dyes/)

[00031] Table 1 lists 51 commercially available pigment colorants in a variety of primary and secondary colors, 47 chromatics, 3 blacks, and 1 white.

Table 1 Commercial Pigment Colorants				
Raw Material Name	CI_Name	Family	COLOR	FDA*
TIOXIDE R-FC6 WHITE	PIGMENT WHITE 6	INORGANIC	WHITE	Y
REGAL 660R BLACK POWDER	PIGMENT BLACK 7	ORGANIC		N
MPC CHANNEL BLACK	PIGMENT BLACK 7	ORGANIC		Y
BK-5099 BLACK OXIDE	PIGMENT BLACK 11	INORGANIC		N
HELIOGEN BLUE K7090	PIGMENT BLUE 15:3	ORGANIC	BLUE	Y
Heliogen Blue K6903	PIGMENT BLUE B 15:1	ORGANIC	BLUE	Y
34L2000 AZURE BLUE	PIGMENT BLUE 28	INORGANIC	BLUE	Y
34L2001 AMAZON BLUE	PIGMENT BLUE 36	INORGANIC	BLUE	N
NUBIX G-58 ULTRAMARINE BLUE	PIGMENT BLUE 29	INORGANIC	BLUE	Y
NUBIX C-84 ULTRAMARINE	PIGMENT BLUE 29	INORGANIC	BLUE	Y

Table 1 Commercial Pigment Colorants				
Raw Material Name	CI_Name	Family	COLOR	FDA *
BLUE				
NUBIX E-28 ULTRAMARINE BLUE	PIGMENT BLUE 29	INORGANIC	BLUE	Y
HELIOGEN GREEN K-8730	PIGMENT GREEN 7	ORGANIC	GREEN	Y
HELIOGEN GREEN K 8605	PIGMENT GREEN 7	ORGANIC	GREEN	Y
CHROMIUM OXIDE GREEN G-6099	PIGMENT GREEN 17	INORGANIC	GREEN	Y
CROMOPHTAL ORANGE GP	PIGMENT ORANGE 64	ORGANIC	ORANGE	Y
2920 BRILLIANT ORANGE	PIGMENT ORANGE 79	ORGANIC	ORANGE	Y
NOVAPERM RED F5RKA	PIGMENT RED 170	ORGANIC	RED	N
225-2480 Sunbrite Scarlet 60:1	Pigment Red 60:1	ORGANIC	RED	N
IRGALITE RED LCB	PIGMENT RED 53:1	ORGANIC	RED	N
DCC-2782 Barium 2B Red	Pigment Red 60:1	ORGANIC	RED	N
Lithol Scarlet 4451	Pigment Red 48:2	ORGANIC	RED	N
CROMOPHTAL RED 2020	PIGMENT VIOLET 19	ORGANIC	RED	Y
CROMOPHTAL MAGENTA P	PIGMENT RED 202	ORGANIC	RED	Y
CROMOPHTAL PINK PT	PIGMENT RED 122	ORGANIC	RED	N
PALIOGEN RED K 3911 HD	PIGMENT RED 178	ORGANIC	RED	Y
CROMOPHTAL RED 2030	PIGMENT RED 254	ORGANIC	RED	Y
CROMOPHTAL RED 2028	PIGMENT RED 254	ORGANIC	RED	Y
Colortherm Red 110M	PIGMENT RED 101	INORGANIC	RED	Y

Table 1 Commercial Pigment Colorants				
Raw Material Name	CI_Name	Family	COLOR	FDA *
Colortherm Red 130M	PIGMENT RED 101	INORGANIC	RED	Y
Colortherm Red 180M	PIGMENT RED 101	INORGANIC	RED	Y
CINQUASIA VIOLET RT-891-D	PIGMENT VIOLET 19	ORGANIC	VIOLET	Y
CROMOPHTAL VIOLET GT	PIGMENT VIOLET 23	ORGANIC	VIOLET	N
PREMIER VU UMV (6112)	PIGMENT VIOLET 15	INORGANIC	VIOLET	Y
SICOTAN BROWN K 2750 FG	PIGMENT YELLOW 164	INORGANIC	BROWN	N
FERRITAN FZ-1000	PIGMENT YELLOW 119	INORGANIC	Tan	Y
NUBITERM Y-905K ZINC FERRITE	PIGMENT YELLOW 119	INORGANIC	Tan	Y
PV FAST YELLOW HG	PIGMENT YELLOW 180	ORGANIC	YELLOW	Y
IRGALITE YELLOW WGPH	PIGMENT YELLOW 168	ORGANIC	YELLOW	N
PV FAST YELLOW HGR (11-3071)	PIGMENT YELLOW 191	ORGANIC	YELLOW	Y
PALIOTOL YELLOW K 2270	PIGMENT YELLOW 183	ORGANIC	YELLOW	Y
CROMOPHTAL YELLOW HRPA	PIGMENT YELLOW 191:1	ORGANIC	YELLOW	Y
CROMOPHTAL YELLOW GRP	PIGMENT YELLOW 95	ORGANIC	YELLOW	Y
IRGALITE YELLOW WSR-P	PIGMENT YELLOW 62	ORGANIC	YELLOW	N
CROMOPHTAL YELLOW 3RLP	PIGMENT YELLOW 110	ORGANIC	YELLOW	Y
9766 FD&C YELLOW # 6	PIGMENT YELLOW 104	ORGANIC	YELLOW	Y
9765 FD&C YELLOW # 5	PIGMENT YELLOW 100	ORGANIC	YELLOW	Y
PALIOTOL YELLOW K 0961 (HD)	PIGMENT YELLOW 138	ORGANIC	YELLOW	Y

Table 1 Commercial Pigment Colorants				
Raw Material Name	CI_Name	Family	COLOR	FDA *
SICOPLAST YELLOW 10-0770	PIG YEL 138 / PIG YEL 183	ORGANIC	YELLOW	Y
SICOTAN YELLOW K 2001 FG	PIGMENT BROWN 24	INORGANIC	YELLOW	Y
SICOTAN YELLOW K 1011	PIGMENT YELLOW 53	INORGANIC	YELLOW	Y
COLORTHERM 10	PIGMENT YELLOW 42	INORGANIC	YELLOW	Y

* As publicized by the commercial producer or as tested by the applicant, or both.

[00032] Table 2 shows 14 commercially available dyes.

Table 2 Commercial Dye Colorants				
Raw Material Name	CI Name	Family	Color	FDA *
Lambdaplast Blue NL	Solvent Blue 59	Anthraquinone	Blue	N
Macrolex Blue RR Granular	Solvent Blue 97	Anthraquinone	Blue	N
Macrolex Green G Granular	Solvent Green 28	Anthraquinone	Green	N
Macrolex Green 5B Granular	Solvent Green 3	Anthraquinone	Green	N
Macrolex Orange R Granular	Disperse Orange 47	Polymethine	Orange	N
Macrolex Orange 3G Granular	Solvent Orange 60	Perinone	Orange	N
Macrolex Red EG Granular	Solvent Red 135	Perinone	Red	N
Macrolex Red E2G Granular	Solvent Red 179	Perinone	Red	N
Thermoplast Red 454	Solvent Red 195	Anthraquinone	Red	N
Macrolex Red Violet R Granular	Disperse Violet 26	Anthraquinone	Violet	N

Table 2 Commercial Dye Colorants				
Raw Material Name	CI Name	Family	Color	FDA *
Macrolex Violet B Granular	Solvent Violet 13	Anthraquinone	Violet	N
Macrolex Violet 3R Granular	Solvent Violet 36	Anthraquinone	Violet	N
Key Plast Yellow 3G	Solvent Yellow 93	Pyrazolone	Yellow	N
Key Plast Yellow AG	Solvent Yellow 114	Quinophthalone	Yellow	N

* As publicized by the commercial producer or as tested by the applicant, or both.

[00033] Achievement of a color match of a plaque with a desired color from the creativity of a designer or a pre-arranged color standard such as Pantone® color standards from an inventory of commercially available colorants is relatively straightforward for a skilled color matcher, even if a few iterations are required to satisfy the customer.

[00034] For example, to simulate the coloration of cedar wood, a combination of four pigments can be used: tan, white, red, and black.

[00035] The concentration of colorant into a carrier is significant because of the relative cost of the colorant ingredient(s) and the need for that color to consistently and precisely mix and disperse into the carrier and then to consistently and precisely color the biofiber.

[00036] Surfactant

[00037] Surfactants are used to aid in dispersion of dyes and pigments. Commercially available surfactants include Surfynol brand defoaming oxirane surfactants from Air Products and Chemicals, with Surfynol CT-324 being preferred to "wet" the biofiber in order to assist the coloration coating to form on the biofiber.

[00038] Optional Functional Additives

[00039] Additives to improve processing or performance of the colorants of the present invention, can be added according to preferences of this skilled in the art. For example, functional additives can include anti-oxidants, UV absorbers, wood stabilizers, anti-stats, blowing agents, biocides, organoclays, defoaming agents, pH modifiers, and the like.

[00040] Generally, minor amounts of such additives provide improvement of performance to the biofiber polymer compound during processing or in performance of the finished article after manufacturing. One skilled in the art without undue experimentation can determine the appropriate concentration.

[00041] Frequently, the preparation of a colored plastic article does not involve merely color but also special effect features, such as Granite, Translucent, Pearls, Metallics, Fluorescents, Iridescent, Marbles, etc.

[00042] Non-limiting examples of such additives are commercially available from PolyOne Corporation of Avon Lake, Ohio, USA (www.polyone.com) and marketed under the following brands: OnColor FX colorants, PolyOne colorants, etc.

[00043] Wood fiber is composed of lignin, cellulose and hemi cellulose. When wood fiber is exposed to natural sun light, the lignin degrades and exposes the cellulose. The cellulose is light in color and the wood appears "bleached". The color stability of the wood fiber can be improved by treating the fibers with UV absorbers and photo stabilizers that minimize the degradation of lignin. The polymer that is used in the biofiber compound of the present invention is also susceptible to degradation and should be stabilized by the addition of UV absorbers and stabilizers.

[00044] Commercially available UV absorbers for treating wood are sold under the Tinuvin brand by Ciba Specialty Chemicals. An example of a product that can be used to treat wood is Tinuvin 477 DW. This is an aqueous UV absorber preparation developed for water borne coatings. The UV

absorber in Tinuvin 477 DW is based on a red shifted hydroxyl-phenyl-triazine chromophore, is very heat stable and provides long wave length UV-A range protection. An example of a photo stabilizer for wood protection is sold under the Lignostab 1198 brand also by Ciba Specialty Chemicals. Lignostab 1198 stabilizer is a water soluble HALS stabilizer and inhibits the photo oxidation of lignin and protects the color of wood. It works well in combination with a UV absorber like Tinuvin 477 DW absorber.

[00045] Commercially available sodium silicate binders are sold by PQ Corporation located at Valley Forge, PA. Sodium silicate can be incorporated along with film-forming polymers in coatings. The advantages include cost savings, increased flame retardancy, and increased resistance to heat, light, oxidation and microbial degradation. A grade particularly suitable when using evaporation drying is Sodium Silicate N. This product is a syrupy liquid with a viscosity of 1.8 poise and density of 11.6 lbs/gallon.

[00046] Table 3 shows the acceptable, desirable and preferred weight percents of ingredients for biofiber colorant compositions of the present invention.

Table 3			
Ingredient (Wt. %)	Acceptable Range	Desirable Range	Preferred Range
Carrier (de-ionized water)	15 -- 60%	20 -- 40%	20--25%
Binder	5 -- 15%	7 -- 12%	8 -- 10%
Colorant	2 -- 75%	50 -- 70%	60 -- 65%
Surfactant	0.5 -- 10%	0.5 -- 5%	1 --4%
Optional Functional Additives	0 -- 10%	0 -- 5%	0 -- 3%

[00047] The mixing equipment used to make the liquid colorant composition can be any suitable equipment already used in the art of making

liquid color, inks or paint type products. For example, such equipment includes high speed "Cowles" type dispersers, media mills, three-roll mills and rotor-stator type dispersers.

[00048] Mixing equipment can operate at mixing speeds ranging from about 100 rpm to about 10,000 rpm, and preferably from about 500 to about 8000 rpm. Mixing equipment can operate at temperatures ranging from about 25°C to about 100°C, and preferably from about 60°C to about 100°C.

[00049] The liquid colorant composition is made by charging the mixing vessel with the liquid ingredients and mixing them for a period of 1 minute at low speed (1000 rpm for a 2 inch (5.1 cm) diameter blade disperser). The speed is increased to 5000 rpm and the pigments are added gradually and mixing continued for additional 15 minutes until the required grind is achieved. An optional step of milling using a 3 roll mill or media mill can be employed to increase the degree of dispersion or when using difficult to disperse pigments.

[00050] Biofiber

[00051] For avoidance of doubt, "biofiber" refers to both a single fiber of naturally-occurring particulate material as well as a plurality of many fibers. As is often the case in the English language, what appears to be a singular also includes many of the same, for example, when referring to sheep and other herding animals.

[00052] Any naturally-occurring particulate material is a candidate for being coated by the composition of the present invention. The attention given to renewable resources of naturally-occurring materials for use in plastic articles has opened markets for supply of many different types of plant matter and animal matter.

[00053] Non-limiting examples of plant matter include wood fiber, wood flour, flax, fibrils of grass, fragments of shells, and the like. Wood fiber is most prevalent, particularly pine.

[00054] Non-limiting examples of animal matter include mammalian hair, bone fragments, organic shells, reptilian hides, and the like.

[00055] The biofiber can have an aspect ratio ranging from about 1 to about 100, and preferably from about 2 to about 10. The biofiber can have a length ranging from about 10 microns to about 6 mm, and preferably from about 50 microns to about 2mm.

[00056] A mixture of different biofiber types can be used in the invention to create different colorations and textures in the final plastic article designed to simulate natural wood.

[00057] Table 4 shows the acceptable, desirable and preferred weight percents of ingredients for coating biofiber with colorant compositions of the present invention.

Table 4			
Ingredient (Wt. %)	Acceptable Range	Desirable Range	Preferred Range
Colorant Composition	1 – 12%	1 -- 10	2 – 9%
Biofiber	60 -- 90%	70 – 85%	75- 80%
Water	2 -- 20%	5 -- 15%	10 -- 15%
Optional stabilization package	0 -- 5%	0.5 -- 4%	1 --3%

[00058] The mixing equipment used to coat the biofiber can also be any suitable equipment already used in the art of mixing liquids and solids together, especially high intensity mixing equipment also capable of operating at an elevated temperature. Examples are high intensity mixers available under trade names “Henschel” or “Welex” or plow mixers manufactured by the Littleford-Day Company. Such mixers are equipped mixing elements that

product intense mixing of liquid and dry ingredients. These mixers can also be equipped with a cooling or heating jacket for controlling the temperature of the batch.

[00059] Mixing equipment can operate at mixing speeds ranging from about 100 rpm to about 5000 rpm, and preferably from about 500 to about 3000 rpm. Mixing equipment can operate at temperatures ranging from about 25°C to about 100°C, and preferably from about 60°C to about 100°C.

[00060] The mixing speed can be arranged in stages, with lower speeds being used initially to disperse the colorant composition into the mass of biofiber and then a higher speed to thoroughly integrate the liquid with the solid and break any “agglomerates”.

[00061] The biofiber is charged to a 200 liter capacity, Henschel type mixer. The liquid colorant and water are added to the mix. Mixing is carried out in two stages: low speed (885 rpm for a 200 liter mixer) for 60 seconds and high speed (1765 rpm for a 200 liter mixer) for about 80 seconds. The batch is inspected to ensure that the coating is uniform and then discharged.

USEFULNESS OF THE INVENTION

[00062] Coated colored biofiber can be used as an ingredient in WPC building materials and any other plastic article intended to simulate a naturally-occurring material. The coated colored biofiber can be letdown into plastic resins and other ingredients useful for making molded or extruded articles in weight percents ranging from about 10% to about 80%, and preferably from about 50% to about 70%.

[00063] As stated previously, the plastic resins can be such as acrylonitrile-butadiene-styrene (ABS), polyvinyl chloride (PVC), polybutylene terephthalate (PBT), polymethyl methacrylate (PMMA), styrene-acrylonitrile (SAN), polyphenylene ether (PPE), polycarbonate(PC), styrene-butadiene-styrene (SBS), acrylic polymers, polyolefins, and the like.

[00064] Other ingredients used in the plastic compounding can include additional colorants, ultraviolet stabilizers, processing aids, and the like.

[00065] Other embodiments appear in the examples.

EXAMPLES

[00066] Table 5 shows a colorant composition used to prepared coated biofiber of the present invention.

Table 5 Colorant Composition			
Ingredient Name	Brand Name	Commercial Source	Weight Percent (%)
De-ionized water carrier	N/A	Various	23.15
Resin binder	Esicryl 740 Styrene-acrylic emulsion	Cook Composites and Polymer, Kansas City, KS	9.2
Ammonium Hydroxide pH booster	N/A	Various	0.45
Surfactant to disperse pigment and wet wood fiber	Surfynol CT-324	Air Products and Chemicals, Allentown, PA	2
Defoamer	Surfynol MD-20	Air Products and Chemicals, Allentown, PA	0.2
Pigment	Ferritan FZ-1000 Tan	Elementis	47.320
Pigment	Tiona 696 TiO ₂ White	Millennium	11.310
Pigment	R-481 red iron oxide	Delta Colours	5.92
Pigment	Raven 1170 carbon black	Degussa	0.45

[00067] The ingredients were mixed as follows:

[00068] To a stainless vessel, the liquid ingredients are first added and mixed at 1000 rpm using a Cowles type disperser fitted with a 2 inc (5.1 cm) diameter blade. After mixing the liquid ingredients for 1 minute, the speed is increased to 5000 rpm and the pigments are added. The mixing is continued for an additional 15 minutes and the batch is then completed.

[00069] Table 6 shows the ingredients to make coated colored wood fiber of Examples 1 and 2, compared with Comparative Example A, which was uncoated, uncolored natural wood fiber. Table 6 also shows the mixing parameters for making Examples 1 and 2.

Table 6			
Recipes for Coated Wood Fiber			
Ingredient Name (Wt. %)	Example 1 (Cedar)	Example 2 (Cedar)	Comparative Example A, Control
Wood fiber (150-500 microns, 2% moisture)	85%	83%	100%
Colorant Composition from Table 5	3%	3%	
Water	12%	12%	
Mixing Conditions for Making Coated Wood Fiber			
Mixing Equipment	High intensity mixer	High intensity mixer	None
Mixing Temp.	90-93°C	96°C	
Mixing Speeds and Durations	Low speed 885 RPM for 60 seconds, followed by High speed 1765 RPM for 80 seconds	First Stage: Low speed 885 RPM for 60 seconds, followed by High speed 1765 RPM for 80 seconds. Second Stage after addition of 2 wt. % sodium silicate:	

Table 6			
Recipes for Coated Wood Fiber			
		Mixed low speed 885 RPM for 30 seconds and then high speed 1765 RPM for 40 seconds	
Order of Addition of Ingredients	Wood fiber, color and water at beginning.	Wood fiber, color and water in first stage and then sodium silicate added in second stage	
Form of Product After Mixing	Solid wood fibers coated with bound pigment	Solid wood fibers coated with bound pigment	

[00070] Table 7 shows the recipes for thermoplastic compounds made using the coated wood fiber of Examples 1 and 2 and Comparative Example A.

Table 7			
Wood Plastic Composite			
Ingredient	Example 3 (Wt. %)	Example 4 (Wt. %)	Comparative Example B (Wt. %)
Coated colored wood fiber (Dried to less than 1% moisture)	60% of Example 1	60% of Example 2	60% of Comparative Example A
Color concentrate (CC 10059309WE from PolyOne Corporation)	1%	1%	2%
UV package (CC 00005519WE from PolyOne Corporation)	1.36%	0.35%	
Process aid (TPW 104 from Strucktol)	6%	6%	6%
Resin (High Density Polyethylene from MasterMark)	31.64%	32.65%	32%

[00071] Examples 3 and 4 and Comparative Example B were made into simulated wood boards having dimensions of 4 feet long x 5.25 inches wide x 1 inch thick (1.21 m x 13.34 cm x 2.54 cm) by mixing the ingredients using a counter rotating, conical twin screw extruder. The screw rpm was 19, and the melt temperature was 352°F (178°C).

[00072] Table 8 shows another colorant composition used to prepared coated biofiber of the present invention.

[00073] Table 9 shows examples of several recipes used to prepare colored biofiber samples.

[00074] Table 10 shows the recipes for the thermoplastic compounds made from examples of coated wood fibers from Table 9

Table 8 Colorant Composition			
Ingredient Name	Brand Name	Commercial Source	Weight Percent (%)
De-ionized water carrier	N/A	Various	23.15
Resin binder	Esicryl 740 Styrene-acrylic emulsion	Cook Composites and Polymer, Kansas City, MO	9.2
Ammonium Hydroxide pH booster	N/A	Various	0.45
Surfactant to disperse pigment and wet wood fiber	Surfynol CT-324	Air Products and Chemicals, Allentown, PA	2
Defoamer	Surfynol MD-20	Air Products and Chemicals, Allentown, PA	0.2
Pigment	Sicotan Yellow K2001 FG	BASF	41.30
Pigment	Tiona 696 TiO ₂ White	Millennium	11.21
Pigment	R-481 red iron oxide	Delta Colours	11.81
Pigment	Raven 1170 carbon black	Degussa	0.68

Table 9 Coated Wood Fiber Composition								
Ingredient Name (Weight %)	Comp. C	Ex. 6	Ex. 7	Ex.8	Ex.9	Ex.10	Ex 11	Ex 12
Wood fiber (150-500 microns), 2% moisture	100%	85%	84%	84%	85%	84%	76%	76%
Colorant Table 5		3%	6%	9%			3%	

Table 9 Coated Wood Fiber Composition								
Ingredient Name (Weight%)	Comp. C	Ex. 6	Ex. 7	Ex.8	Ex.9	Ex.10	Ex 11	Ex 12
Colorant Table 8					3%	6%		3%
Water		12%	10%	7%	12%	10%	15%	15%
Lignostab 1198							1%	1%
Tinuvin 477 DW							5%	5%

Table 10 Wood Plastic Composite								
Ingredient	Comp. D	Ex 13	Ex 14	Ex 15	Ex 16	Ex 17	Ex 18	Ex 19
Coated color fiber (dried to less than 1% moisture)	50% of Comp. C	50% of Ex 6	50% of Ex 7	50% of Ex 8	50% of Ex 9	50% of Ex 10	50% of Ex 11	50% of Ex 12
Color concentrate (CC 10059309WE from PolyOne Corporation)	2%							
Process aid (TPW 104 from Strucktol)	4%	4%	4%	4%	4%	4%	4%	4%
HDPE resin (0.5 MI copolymer HP-5460 flake from Ineos Polyolefins)	44%	46%	46%	44%	46%	46%	46%	46%

[00075] Examples 13-19 and Comparative Example D were made into strips 4 feet long, 2 inches wide and 1/8 inch thick (1.21 m x 5.1 cm x 0.32 cm) using a Brabender Plasti-Corder mixer equipped with a conical twin screw extruder. The screw speed was 20 rpm and the melt temperature was approximately 380°F (193°C).

[00076] Boards from Table 7 were then tested under accelerated aging using a Q-Panel, QUV using ASTM method D4329-99/Outdoor. This method employs 20hrs of light cycle @50°C and 4hrs of dark condensation cycle @ 45°C. After 2000 hours of exposure, boards from Examples 3 and 4 retained their color much better than the board from Comparative Example B. Fig. 1 shows photo images of the weathered boards.

[00077] Strips from Table 10 were tested under accelerated aging using a Q-Panel, QUV using the following conditions: 8hrs UV at 60°C, 4hrs condensations at 50°C. After 2000 hours of exposure, strips that were made with the coated wood fiber (Examples 13-19) retained their color much better than the Comparative Example D strip. Fig. 2 shows photo images of the weathered strips.

[00078] The invention is not limited to the above embodiments. The claims follow.


CLAIMS

1. A colorant composition for biofiber, comprising:
 - (a) a carrier in an amount ranging from about 15 to about 60 weight percent of the colorant composition;
 - (b) binder;
 - (c) colorant; and
 - (d) surfactant, and optionally
 - (e) at least one functional additive selected from the group consisting of pH modifier and defoaming agent.
2. The composition of Claim 1, wherein the colorant comprises a pigment, a dye, a combination of pigments, a combination of dyes, a combination of pigments and dye, a combination of pigment and dyes, or a combination of pigments and dyes.
3. The composition of Claim 1 or Claim 2, wherein the binder is a film-forming polymer compatible with polyolefins, polyvinyl halides, or both and wherein the carrier is in an amount ranging from about 20 to about 40 weight percent of the colorant composition.
4. The composition of any of Claims 1-3, wherein binder is selected from the group consisting of acrylics, styrene-acrylics, styrene-butadienes, polyurethanes, vinyl acetate, and vinyl acrylics and wherein the carrier is in an amount ranging from about 20 to about 25 weight percent of the colorant composition.
5. The composition of Claim 4, wherein the binder is capable of melting at a temperature of less than about 100°C but also capable of forming a film at a temperature above about 25°C.


6. The composition of any of Claims 1-5, wherein the binder is present in the composition in an amount ranging from about 5 to about 15 weight percent, wherein the colorant is present in the composition in an amount ranging from about 2 to about 75 weight percent, wherein the surfactant is present in an amount ranging from about 0.5 to about 10 weight percent, and wherein the optional functional additive is present, if at all, in an amount ranging up to 10 weight percent.
7. The composition of any of the above Claims, wherein the composition is a coating about the surface of biofiber after the carrier has been removed.
8. The composition of Claim 7, wherein the biofiber is a naturally-occurring particulate material.
9. A coated colored biofiber, comprising:
 - (a) biofiber,
 - (b) a coating on the biofiber comprising a composition of any of Claims 1-7 after the carrier has been removed, and, optionally
 - (c) a UV absorber, a photo stabilizer, or both.
10. A thermoplastic compound, comprising:
 - (a) thermoplastic resin and
 - (b) coated colored biofiber of Claim 9.
11. The compound of Claim 10, wherein the thermoplastic resin is selected from the group consisting of acrylonitrile-butadiene-styrene (ABS), polyvinyl chloride (PVC), polybutylene terephthalate (PBT), polymethyl methacrylate (PMMA), styrene-acrylonitrile (SAN), polyphenylene ether (PPE), polycarbonate(PC), styrene-butadiene-styrene (SBS), and acrylic polymers, polyolefins, and combinations thereof.

12. A method of coloring biofiber, comprising the steps of:
- (a) preparing a colorant composition of any of Claims 1-7, and
 - (b) mixing the colorant composition and biofiber at an elevated temperature for sufficient time to permit the carrier to be removed and allowing the other ingredients of the colorant composition to form an colored coating on at least a portion of the biofiber.


Fig. 1

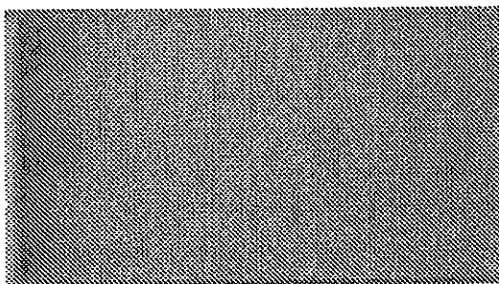

Comparative Example B

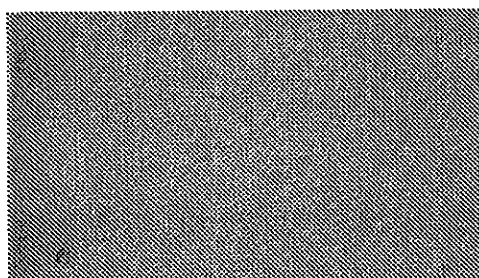

Example 4

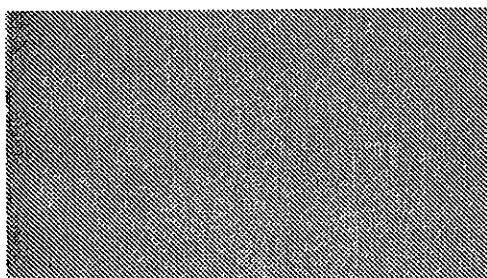

Example 3

Fig. 2

