



(51) International Patent Classification:

*B63B 27/10* (2006.01)      *B66C 23/68* (2006.01)  
*B66C 13/02* (2006.01)      *B66C 23/00* (2006.01)  
*B66C 23/52* (2006.01)

(21) International Application Number:

PCT/NL2014/050002

(22) International Filing Date:

7 January 2014 (07.01.2014)

(25) Filing Language:

Dutch

(26) Publication Language:

English

(30) Priority Data:

2010094      8 January 2013 (08.01.2013)      NL

(71) Applicant: **INNOVATIVE INPUT B.V.** [NL/NL]; Ringdijk 396, NL-2983 GS Ridderkerk (NL).

(72) Inventor: **KALKMAN, Pieter**; Brugweg 78, NL-2741 KV Waddinxveen (NL).

(74) Agent: **NEDERLANDSCH OCTROOIBUREAU**; J.W. Frisolaan 13, NL-2517 JS The Hague (NL).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: CRANE WITH HEAVE COMPENSATION

Fig. 1

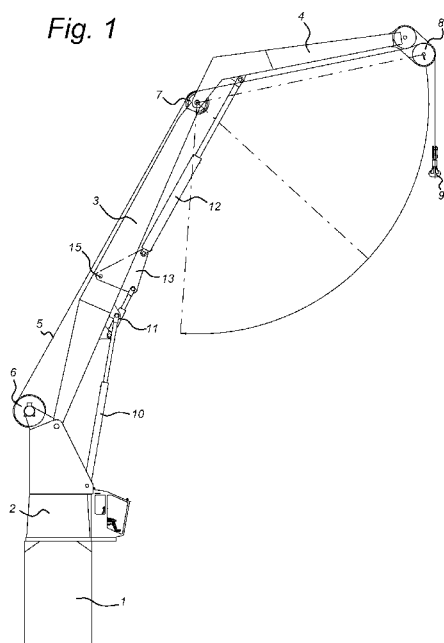

(57) Abstract: A crane comprises a base (1, 2), an articulated jib (3, 4) which is supported by the base, as well as hoisting means (5, 9) which are guided from the base via the jib, such as a hoisting cable. The jib comprises jib parts (3, 4) which are rotatably supported with respect to each other and with respect to the base (1, 2), as well as respective jib part drives (10-12) for varying the angular position of jib parts with respect to the base or with respect to another jib part. One of the jib part drives has series-connected linear actuators (11, 12), one of which is connected to one of the jib parts and the other of which is connected to a jib part adjoining said jib part and which linear drives cooperate with each other via a guide (13) on the jib.